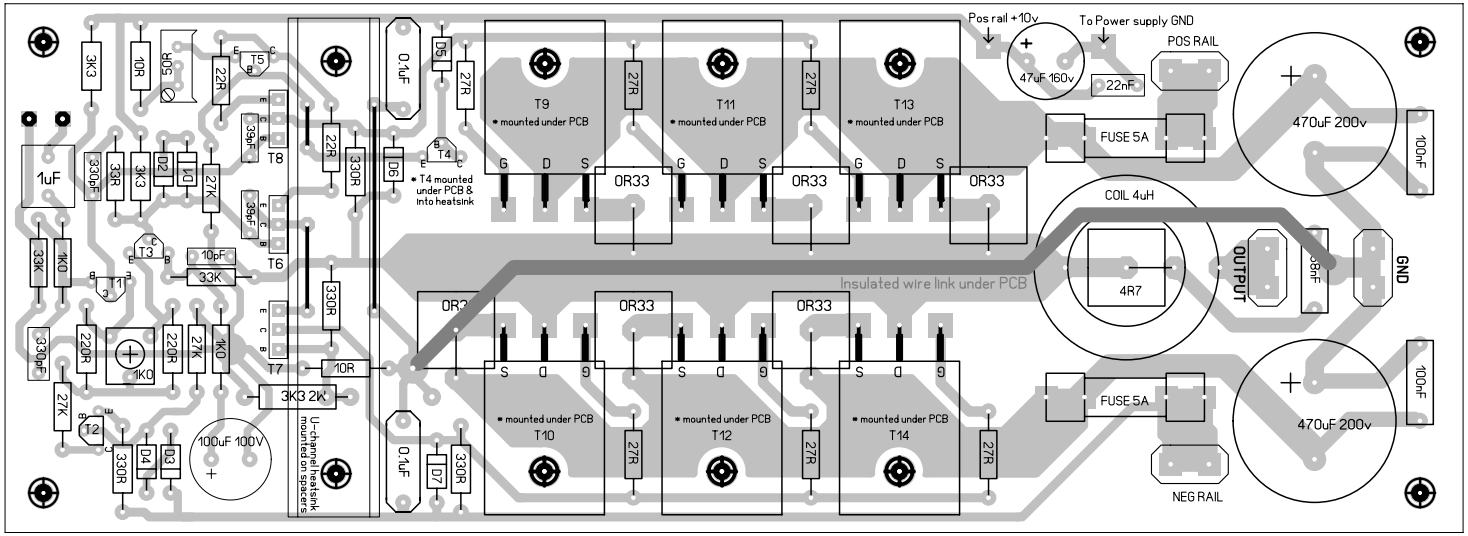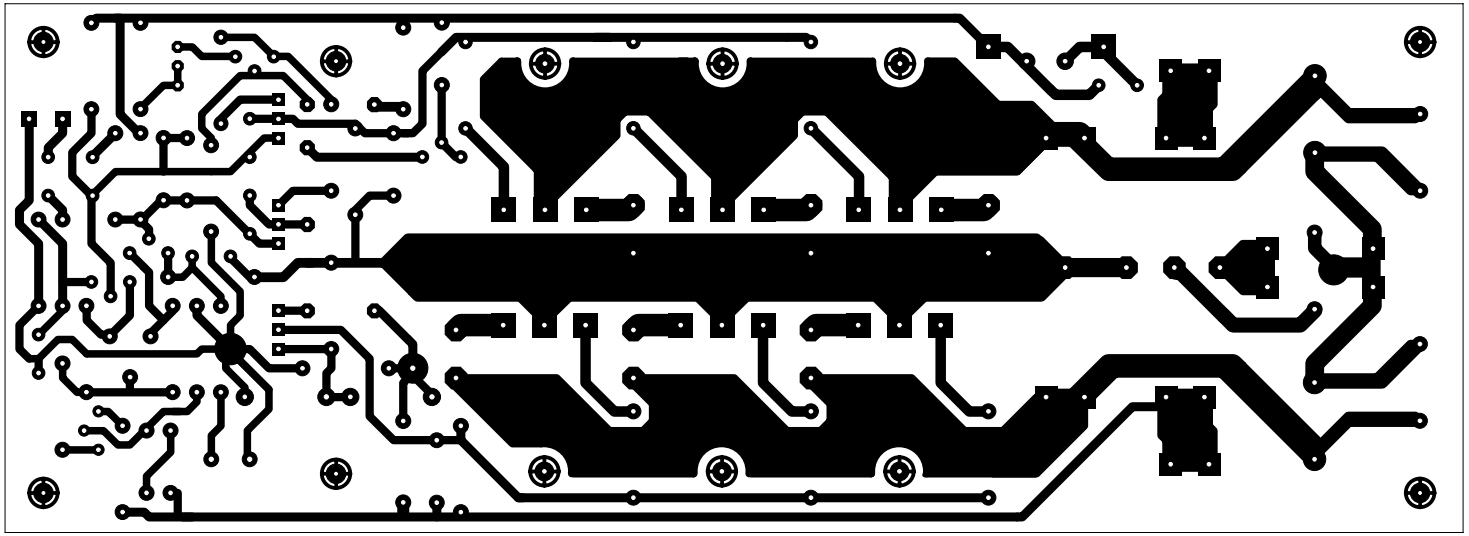
Pos rail +10v
To Power supply GND
POS RAIL
47uF 160v
22nF
FUSE 5A
470uF 200v
100nF
COIL 4uH
4R7
OUTPUT
GND
Insulated wire link under PCB
T9
T11
T13
T10
T12
T14
* mounted under PCB
OR33
27R
T4
* T4 mounted under PCB & into heatsink
D5
D6
D7
0.1uF
330R
10R
3K3 2K
U-channel heatsink mounted on spacers
T5
T8
T6
T7
T3
T1
T2
22R
39pF
10uF
33K
220R
27K
1K0
D2
D3
D4
100uF 100V
3K3
1uF
330pF
33K
330pF
RG5