

# Datasheet F-200CV

## Mass Flow Controller for Gases

### > Introduction

Bronkhorst High-Tech model F-200CV Mass Flow Controllers (MFCs) are suited for precise control of virtually all conventional process gases. The MFC consists of a thermal mass flow sensor, a precise control valve and a microprocessor based PID controller with signal and fieldbus conversion. As a function of a setpoint value, the flow controller swiftly adjusts the desired flow rate. The mass flow, expressed in normal millilitres per minute or per hour, is provided as analog signal or digitally via RS232 or fieldbus. The flow range, wetted materials and orifice size for the control valve are determined depending of the type of gas and the process conditions of the application.

Although all specifications in this datasheet are believed to be accurate, the right is reserved to make changes without notice or obligation.

### > Technical specifications

#### Measurement / control system

Accuracy (incl. linearity)	: FS > 5 ml <sub>n</sub> /min: ± 0,5 % Rd plus ± 0,1% FS;
(Based on actual calibration)	FS 3...5 ml <sub>n</sub> /min: ± 1 % FS;
	FS < 3 ml <sub>n</sub> /min: ± 2 % FS
Turndown	: 1 : 50 (in digital mode up to 1:187,5)
Multiple fluid capability	: storage of max. 8 calibration curves
Repeatability	: < ± 0,2% Rd
Settling time (controller)	: 2...4 seconds
Max. Kv-value	: $6,6 \times 10^{-2}$
Control stability	: ≤ ± 0,2% FS
Temperature range	: -10...+70°C
Temperature sensitivity	: zero: < ± 0,05% FS/°C;
(nominal range)	span: < ± 0,05% Rd/°C
Leak integrity (outboard)	: < $2 \times 10^{-9}$ mbar l/s He
Attitude sensitivity	: max. error at 90° off horizontal 0,2% FS at 1 bar, typical N <sub>2</sub>
Warm-up time	: 30 min. for optimum accuracy
	2 min. for accuracy ± 2% FS

#### Mechanical parts

Material (wetted parts)	: stainless steel 316L or comparable
Pressure rating	: 64 bar abs
Process connections	: compression type or face seal male
Seals	: standard : Viton; options: EPDM, Kalrez
Ingress protection (housing)	: IP40



EL-FLOW Mass Flow Controller model F-200CV

#### Electrical properties


Power supply	: +15...24 Vdc ±10%
Power consumption	: max. 320 mA;
	add 50 mA for Profibus, if applicable
Analog output	: 0...5 (10) Vdc, min. load impedance > 2 kΩ;
	0 (4)...20 mA (sourcing), max. load impedance < 375 Ω
Analog setpoint	: 0...5 (10) Vdc, min. load impedance > 100 kΩ;
	0 (4)...20 mA, load impedance ~250 Ω
Digital communication	: standard RS232 ; options: Profibus-DP®, DeviceNet™, EtherCAT®, Modbus-RTU/ASCII, FLOW-BUS

### > Ranges (based on Air)

Model	minimum	nominal	maximum
F-200CV-002	0,014...0,7 ml <sub>n</sub> /min	0,014...2 ml <sub>n</sub> /min	0,014...5 ml <sub>n</sub> /min
F-200CV-005	0,6...3 ml <sub>n</sub> /min	0,6...5 ml <sub>n</sub> /min	0,6...9 ml <sub>n</sub> /min


*Intermediate ranges are available*

## > Model number identification

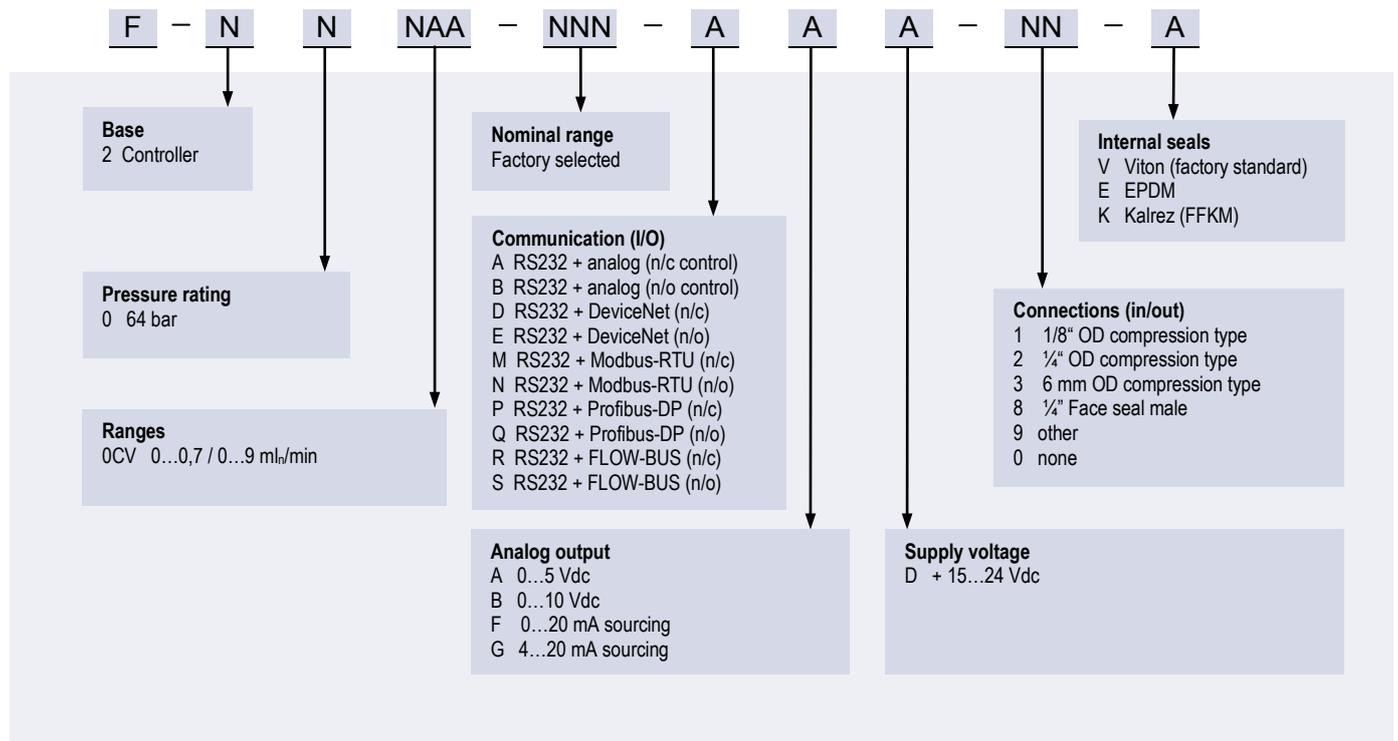

## > Thermal mass flow measuring principle


The heart of the thermal mass flow meter/controller is the sensor, that consists of a stainless steel capillary tube with resistance thermometer elements. At EL-FLOW model F-200CV the total gas flows through this sensor, and is warmed up heating elements. Consequently the measured temperatures  $T_1$  and  $T_2$  drift apart. The temperature difference is directly proportional to mass flow through the sensor.

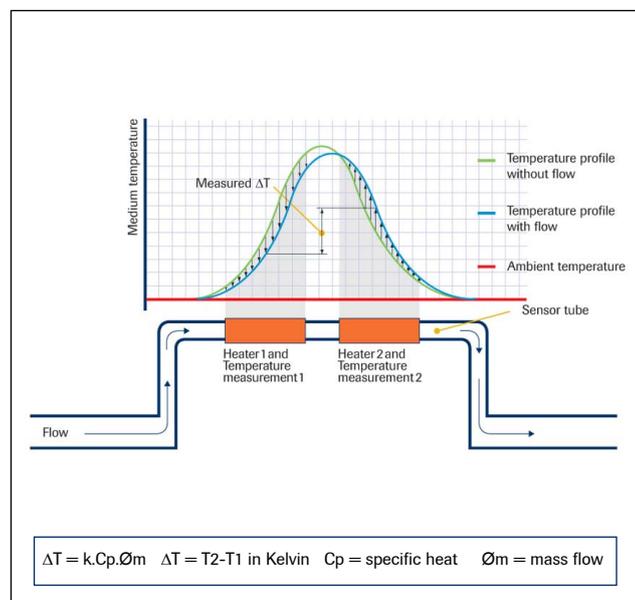

Functional scheme of thermal mass flow sensor (F-200CV)


## > State of the art digital design

Today's EL-FLOW<sup>®</sup> series are equipped with a digital pc-board, offering high accuracy, excellent temperature stability and fast response. The basic digital pc-board contains all of the general functions needed for measurement and control. In addition to the standard RS232 output the instruments also offer analog I/O. Furthermore, an integrated interface board provides DeviceNet<sup>™</sup>, Profibus-DP<sup>®</sup>, Modbus-RTU or FLOW-BUS protocols.

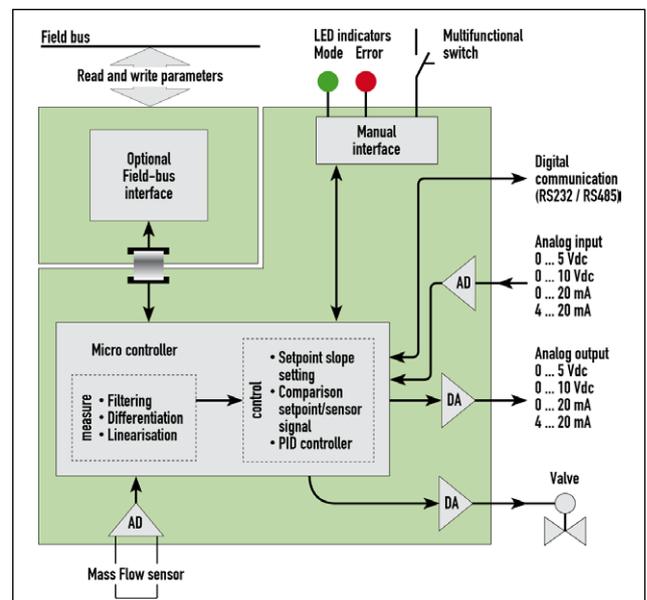


Functional scheme of the digital PC-board

## > Hook-up diagram for analog or RS232 communication

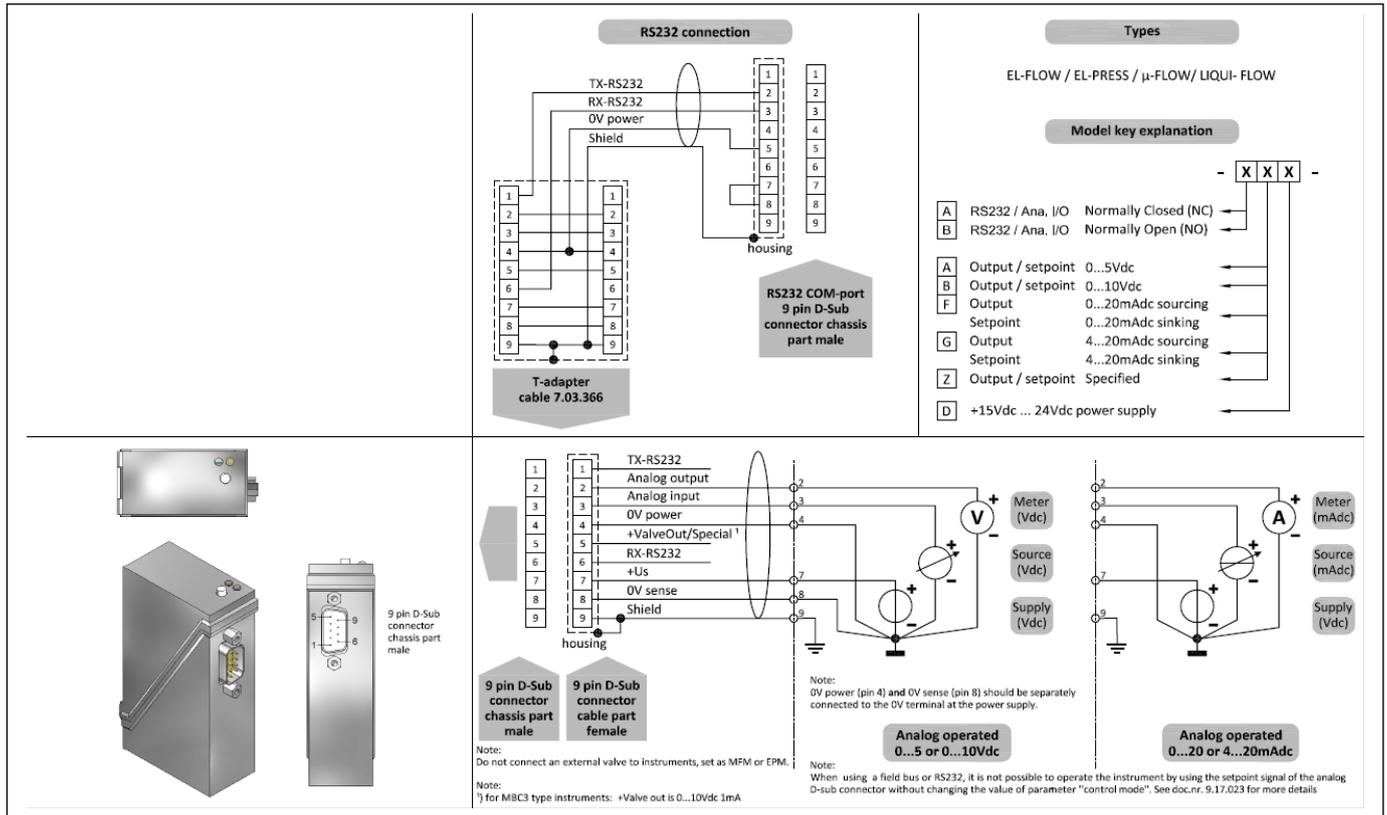


## > Hook-up diagrams for fieldbus communication

For the available fieldbus options we refer to the various hook-up diagrams as indicated below. If you are viewing this datasheet in digital format, you may use the hyperlink to each of the drawings. Otherwise please visit the download section on [www.bronkhorst.com](http://www.bronkhorst.com) or contact our local representatives.

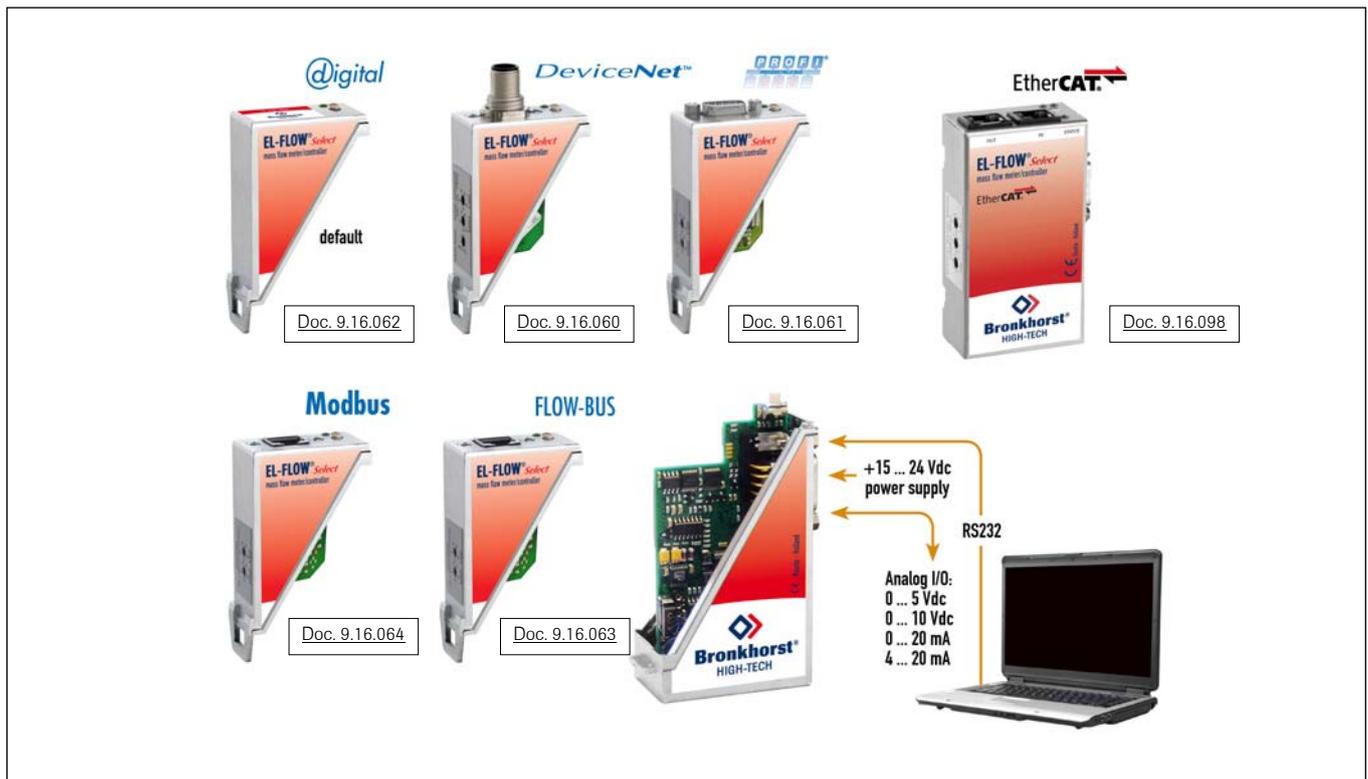


## > Dimensions (mm) and weight (kg)

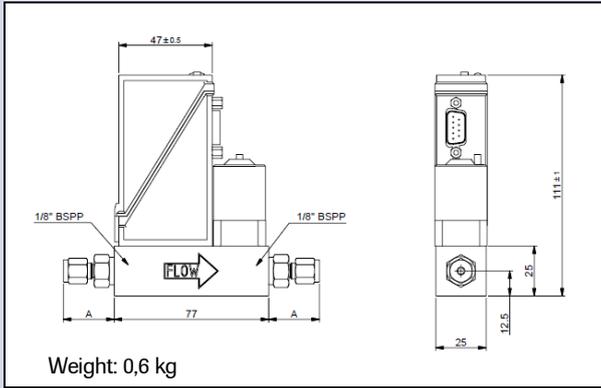

Dimension table adapters (RS-type)

Compression type		1/8"BSPP
		Size A
adapter	3 mm OD	25.3
adapter	6 mm OD	27.6
adapter	8 mm OD	28.6
adapter	1/16" OD	20.6
adapter	1/8" OD	25.3
adapter	1/4" OD	27.6
adapter	3/8" OD	29.5
Face-seal male		A
adapter	1/8" inlet	17.8
adapter	1/4" inlet	23.7

Compression type



\*) Dimension A is typical finger-tight.

## > Options and accessories

- Free software support for operation, monitoring, optimizing or to interface between digital instruments and windows software.	
- IN-LINE filters for protection against particulates	
- BRIGHT compact local Readout/Control modules - E-5700 / E-7000 Power Supply	
- Interconnecting cables for power and analog/digital communication - PiPS Plug-in Power Supply	

## > Alternatives

- IQ <sup>+</sup> FLOW, world's smallest Mass Flow Controller (smallest range 0,2...10 ml <sub>n</sub> /min)	
- LOW-ΔP-FLOW series MFC for low pressure drop applications or corrosive gas service	
- Metal Sealed MFC for Semiconductor or other high purity applications	
- Pre-assembled multi-channel solutions: series FLOW-SMS	

