

**SLS  
12" Subwoofer**



**Type Number:** 830669

**Features:**

The SLS line combines high quality performance with an affordable design. These transducers are ideal for use in systems with high power handling requirements, and are logically combined with the SDS line.

Driver Highlights: Coated paper cone, 39 mm voice coil, AL shorting ring in magnet system.

[Go to Application Notes.](#)



**Specs:**

**Electrical Data**

Nominal impedance	Zn	8	ohm
Minimum impedance	Zmin	6.5	ohm
Maximum impedance	Zo	80.4	ohm
DC resistance	Re	5.7	ohm
Voice coil inductance	Le	3.1	mH
Capacitor in series with x ohm	Cc	--	uF

**T-S Parameters**

Resonance Frequency	fs	28	Hz
Mechanical Q factor	Qms	6.7	
Electrical Q factor	Qes	0.51	
Total Q factor	Qts	0.47	
Ratio fs/Qts	F	59	
Force factor	Bl	12.2	Tm
Mechanical resistance	Rms	1.98	Kg/s
Moving mass	Mms	75.4	g
Suspension compliance	Cms	0.43	mm/N
Effective cone diameter	D	26.2	cm
Effective piston area	Sd	540	cm <sup>2</sup>
Equivalent volume	Vas	172.4	ltrs
Sensitivity		91.2	dB
Ratio BL/√(Re)		5.1	


**Power handling**

100h RMS noise test (IEC)	--	V
Long-term Max System Power (IEC)	--	V
Max linear SPL (rms) @ power	--	d
Short Term Max power	--	V

**Voice Coil and Magnet Parameters**

Voice coil diameter	39	n
Voice coil height	24	n
Voice coil layers	4	
Height of the gap	8	n
Linear excursion +/-	8	n
Max mech. excursion +/-	--	n
Flux density of gap	--	n
Total useful flux	1.5	n
Diameter of magnet	134	n
Height of magnet	22	n
Weight of magnet	1.28	k

## Frequency:

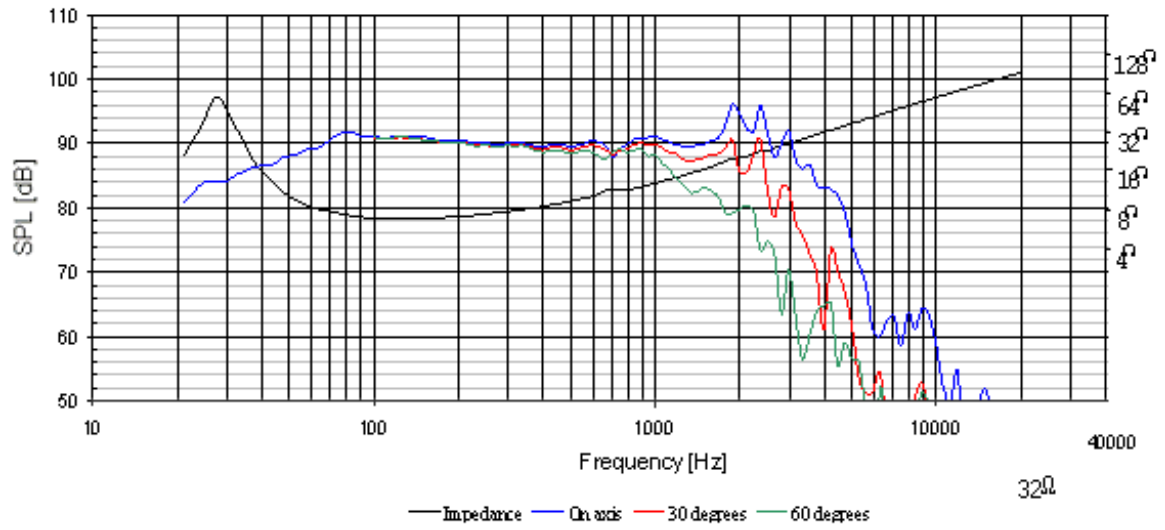

## Mechanical Dimensions:

