



**2-PHASE DC MOTOR DRIVE IC****GENERAL DESCRIPTION**



The FS276, a 1-chip composed of hall sensor and output coil drivers, applied to a 2-phase DC motor. The high sensitivity of Hall effect sensor is suitable for motors from mini-type CPU coolers to blowers and DC fans. Typical operation current up to 0.45A and operating voltage range is from 2.8V ~ 20V.

Using few external components, FS276, a high performance integrated IC, is designed for a single-phase DC motor circuit. The circuit diagram of the typical application example is as below.

**FEATURES**

- 1 chip hall sensor/drivers
- Wide operating voltage range: 2.8V~20V
- Output sink current up to 0.45A
- Very low switching noise.
- Package : TO-92SP-4

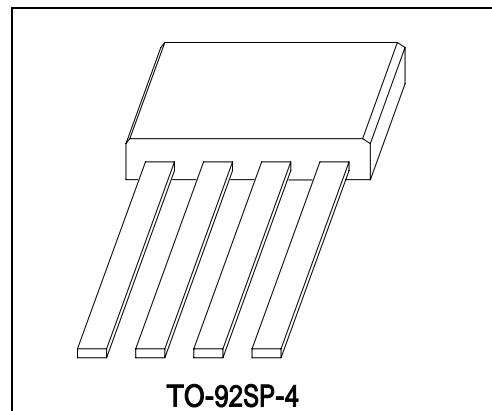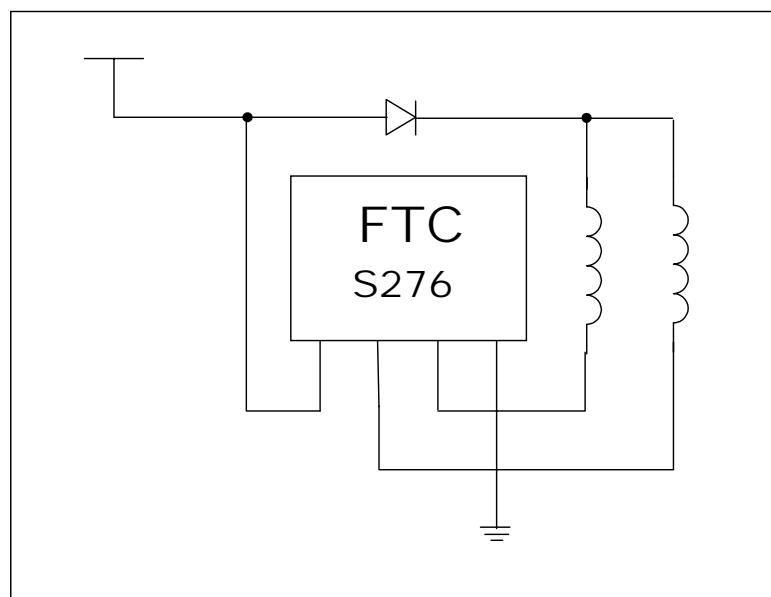
**TYPICAL APPLICATION CIRCUIT**

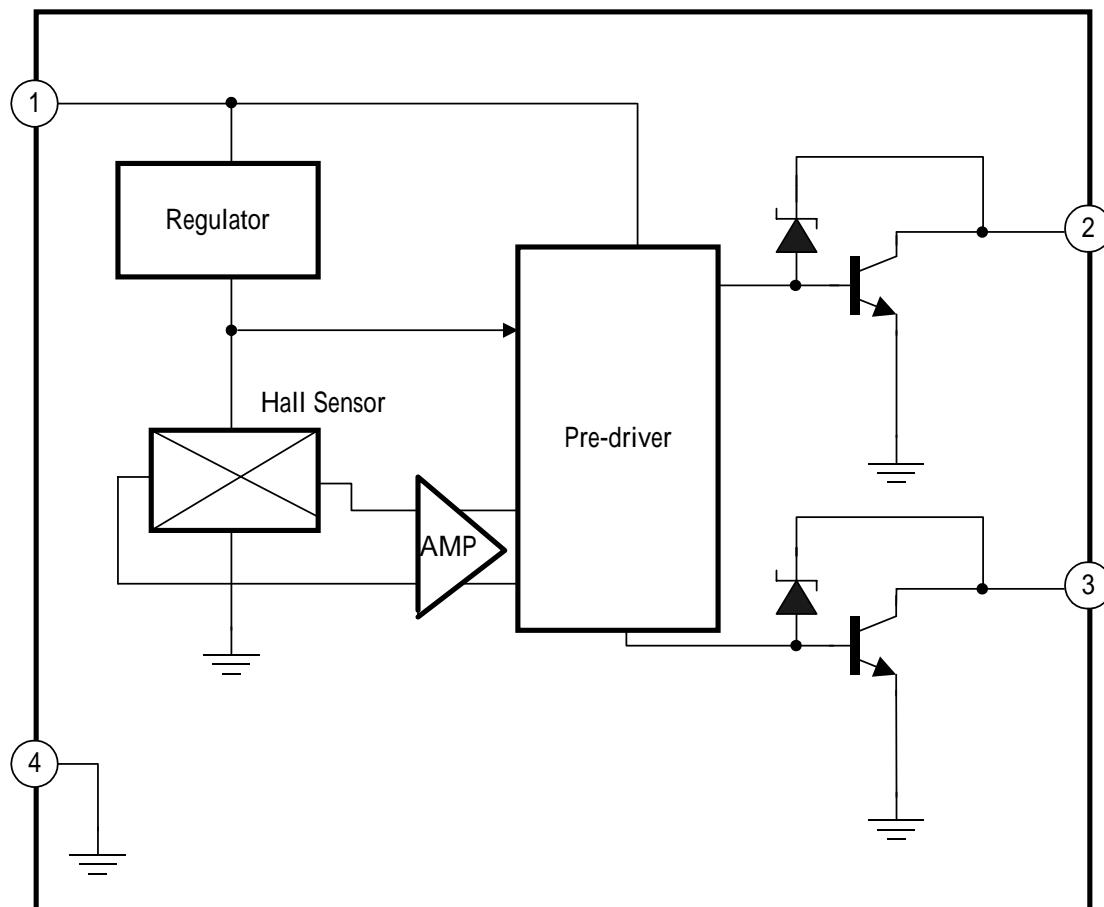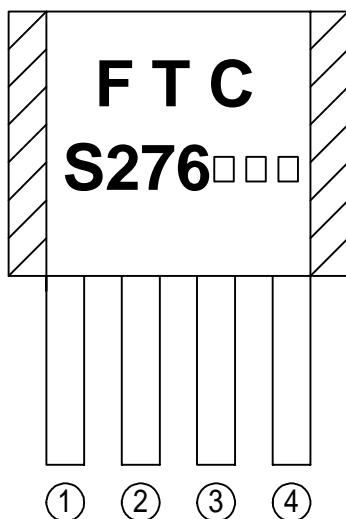**FUNCTIONAL BLOCK DIAGRAM**

**MARK VIEW**

**PIN DESCRIPTION**

NAME	NO.	STATUS	DESCRIPTION
VCC	1	P	IC Power Supply
NO	2	O	Coil driver output It is low state during the N magnetic field.
SO	3	O	Coil driver output It is low state during the S magnetic field.
GND	4	P	IC Ground

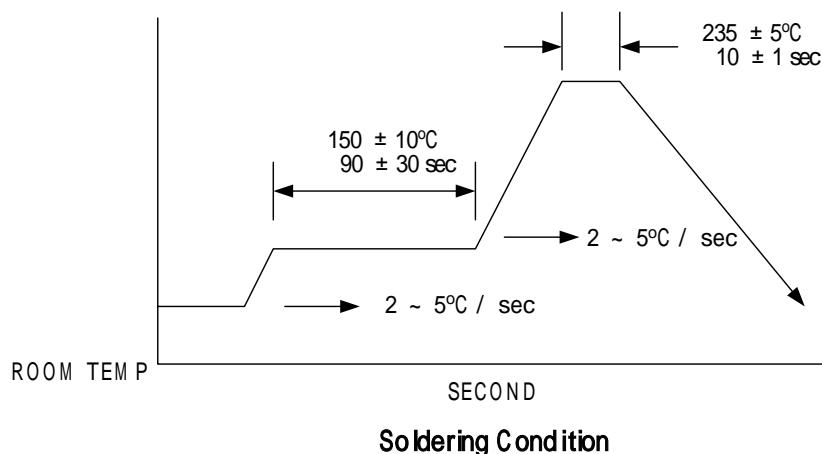**ABSOLUTE MAXIMUM RATINGS**

Zener Breakdown Voltage (Vz) -----	35V
NO/SO Pin Voltage -----	30V
VCC Pin Voltage -----	20V
Peak Sink Current (Io)	
Hold Current-----	700mA
Continuous Current -----	450mA
Power Dissipation	
Ta=25 -----	850mW
Ta=85 -----	450mW
Thermal Resistance	
$\Theta_{ja}$ = -----	0.15 /mW
Operating Temperature Range -----	-20°C 100 °C
Storage Temperature Range -----	-65 °C 150 °C
Junction Temperature -----	+150 °C
Lead Temperature (Soldering, 10 sec) -----	+230 °C



**DC ELECTRICAL CHARACTERISTICS**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Minimum Operating Voltage	V <sub>CC</sub>	No use pin is open (Fig1)		2.8		V
Maximum Operating Voltage	V <sub>CC</sub>	I <sub>CC</sub> < 20mA No use pin is open (Fig1)		20.0		V
Quiescent Supply current	I <sub>CC</sub>	No use pin is open V <sub>CC</sub> : 3.0V 20V (Fig1)		18	20	mA
NO/SO Saturation Voltage	V <sub>SAT</sub>	I <sub>O</sub> = 450mA (Fig1)			1.0	V
Note: Fig1 The IC output state is under N magnetic field.						

**NO/SO Saturation Voltage Vs. Output Current(Io) Vcc=12V, Temp.=25 °C**

Output Current (Io), unit: mA	Saturation Voltage Unit: V	Note
200	0.30	
300	0.47	
400	0.66	
500	0.88	
600	1.09	
700	1.31	



**AC ELECTRICAL CHARACTERISTICS**


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Rise time	(t <sub>r</sub> )	RL=100 (5w) CL=20pF (Fig1)			10	uS
Fall time	(t <sub>f</sub> )	RL=100 (5w) CL=20pF (Fig1)			300	nS

**MAGNETIC CHARACTERISTICS**

FS276-A	Ta=-20 100		
PARAMETER	MIN	MAX	UNIT
Bop	+10	+65	G
Brp	-65	-10	G
Bphys	20	130	

FS276-B	Ta=-20 100		
PARAMETER	MIN	MAX	UNIT
Bop	+5	+80	G
Brp	-80	-5	G
Bphys	10	160	

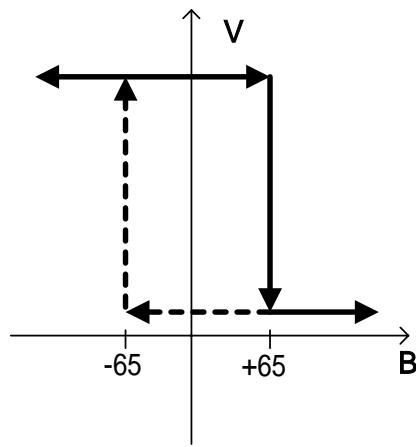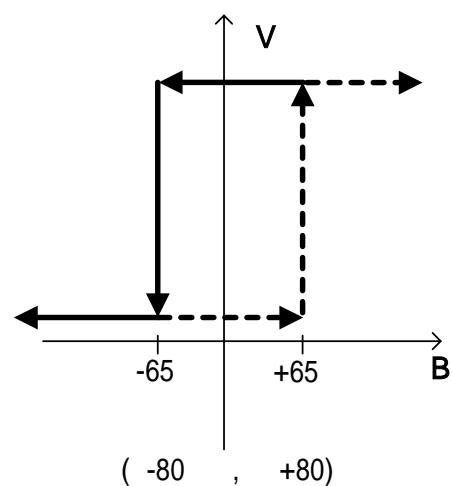**V<sub>NO</sub>**

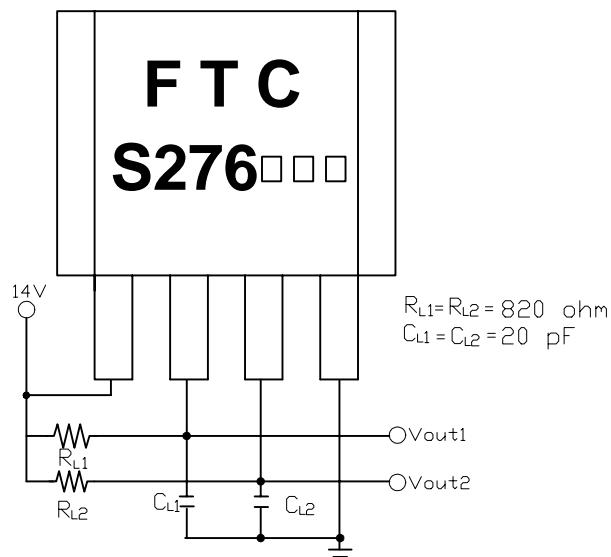**NO PIN**
**V<sub>SO</sub>**

**SO PIN**

**TEST CIRCUITS:****Fig 1**

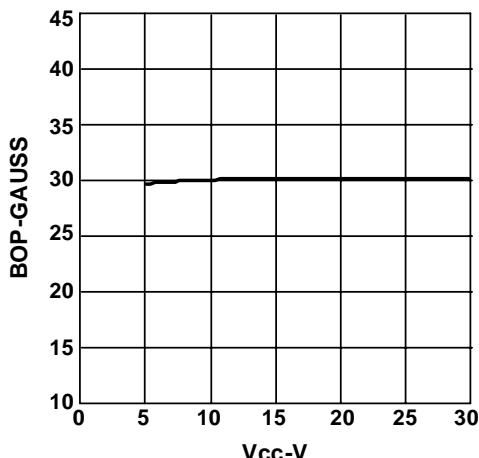
**TYPICAL CHARACTERISTICS**


Figure 1

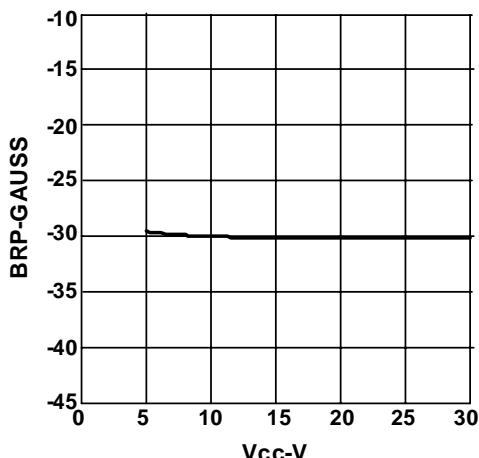


Figure 2

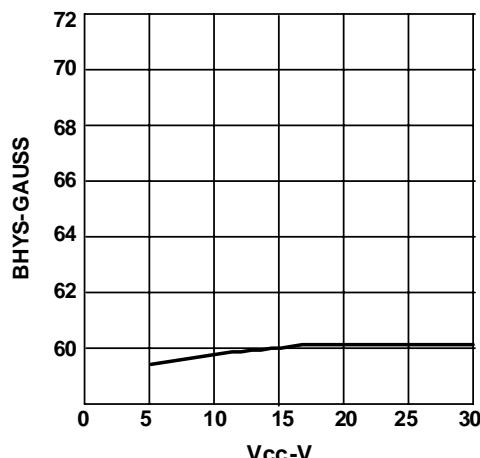


Figure 3

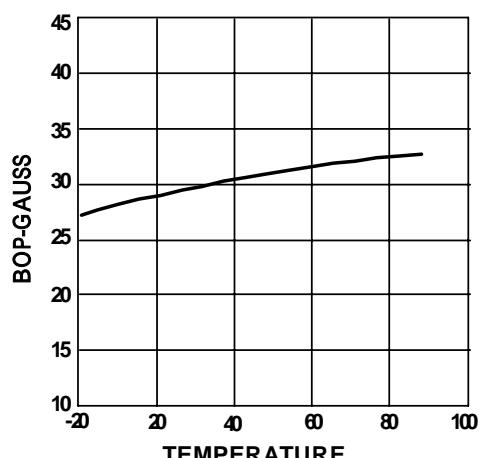


Figure 4

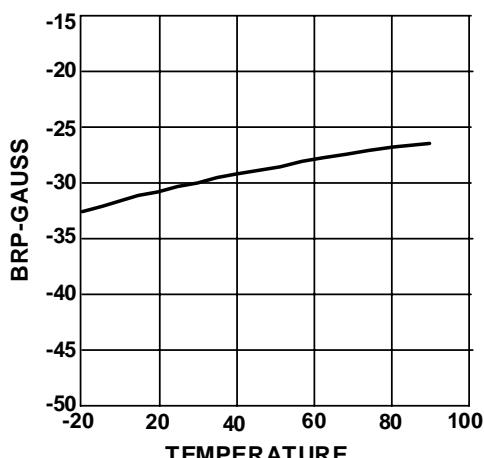


Figure 5

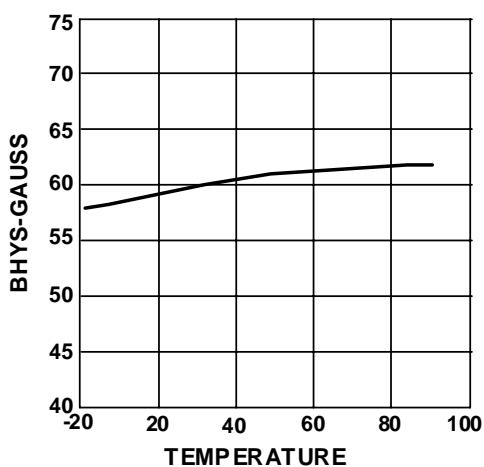


Figure 6

## FUNCTION DESCRIPTIONS

### HALL SENSOR LOCATION

The Fig 2 is the hall sensor location, where marks the IC number. The best sensitivity, which can be intensified as much as possible, depends on the vertical distance and position between magnetic pole and the hall sensor (Fig 3). For the single-phase motor, this design is very important.

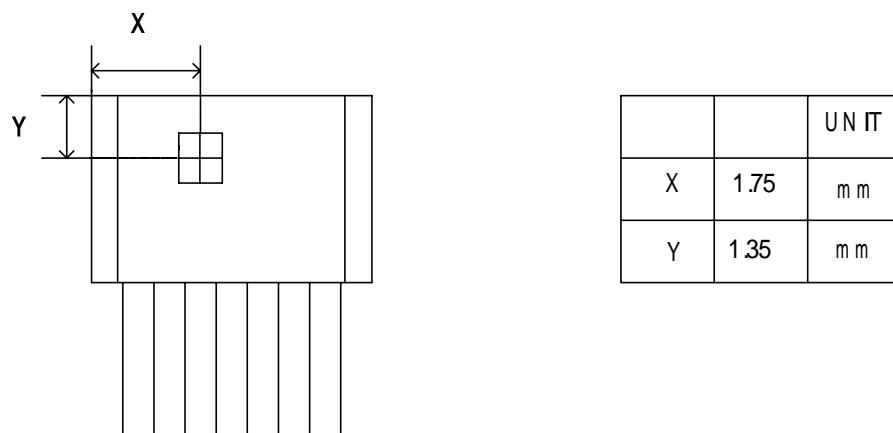


Fig 2 FS276 Hall Sensor Location

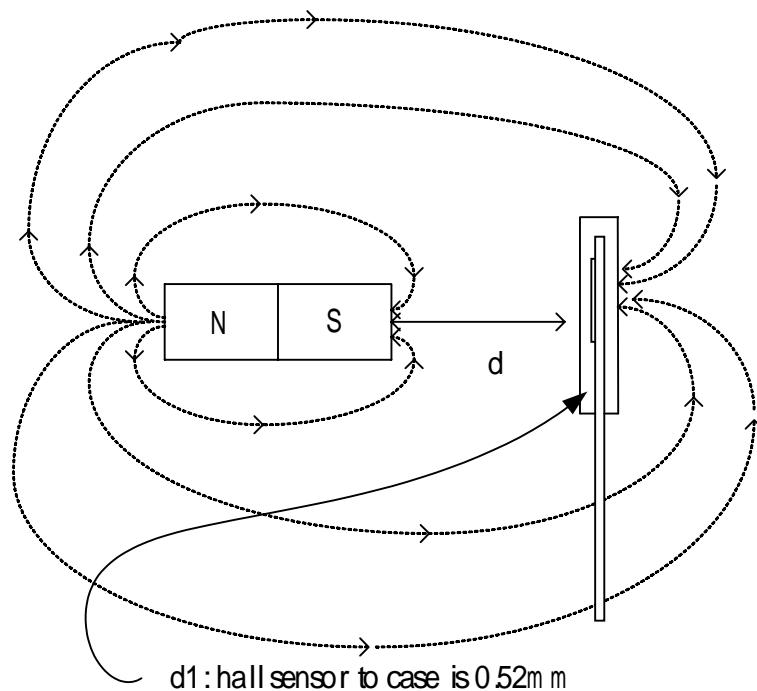


Fig 3 Magnetic Distribution and Z-axis position

## APPLICATION NOTE

### The Example of Typical Application Circuit

Fig 5 is the example of typical application circuit. The red, yellow, and black wires are the input points of the motor system: red, the input of power supply; yellow, the output of FG; black, the ground signal.  $R_C$  is an external pull-up resistance for the use of measuring FG signal. In view of the design, the value of  $R_C$  could be decided by the transistor saturation voltage ( $V_{ON}$ ), sink current ( $I_C$ ), and off-level voltage ( $V_C$ ).

The formula is:  $R_C = \frac{V_C - V_{ON}}{I_C}$

For example:

$V_C = +5V$  for TTL level.

$I_C = 10mA$  at 0.2V saturation voltage

The safety value of  $R_C = 470$

D1 is the reverse protection diode. As if the red and black wires reversely connect with the power source, the current will flow through the ground via IC and coils L1 and L2 to power supply. Under such kind of circumstances, the IC and coils are easy to be burned out. Therefore, D1, the reverse protection diode, is necessary for the design. However, D1 will also cause an extra voltage drop on the supply voltage.

C1 is a capacitor to reduce the ripple noise caused during the transient of the output stages.

The volume of the ripple noise depends on the coil impedance and characteristics.

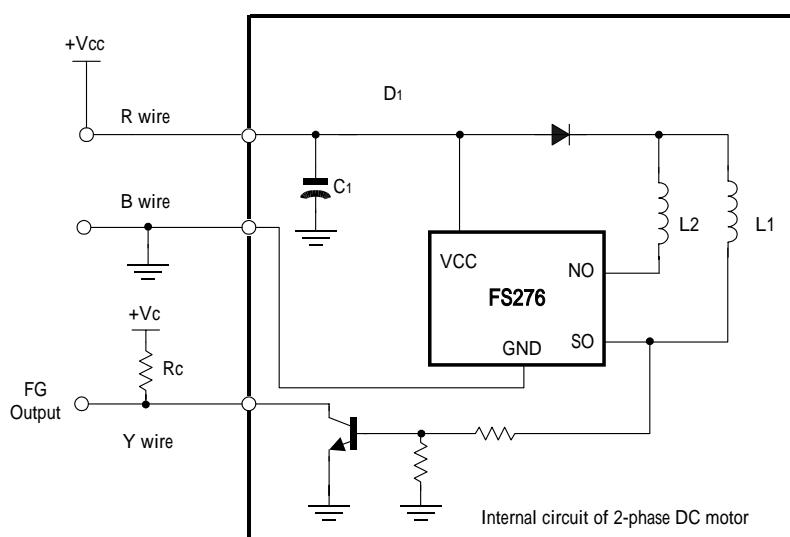
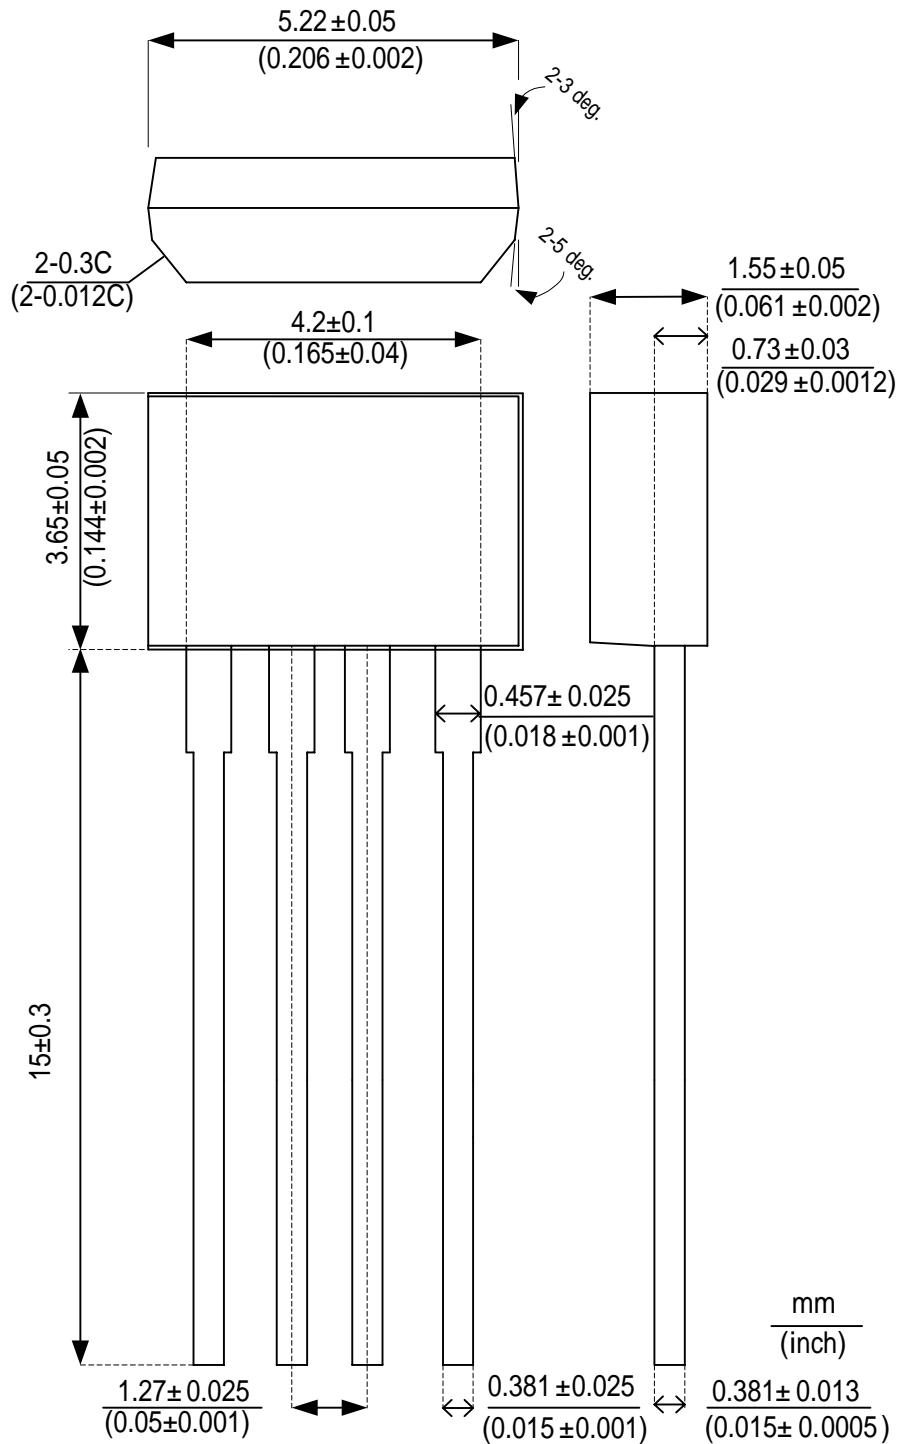
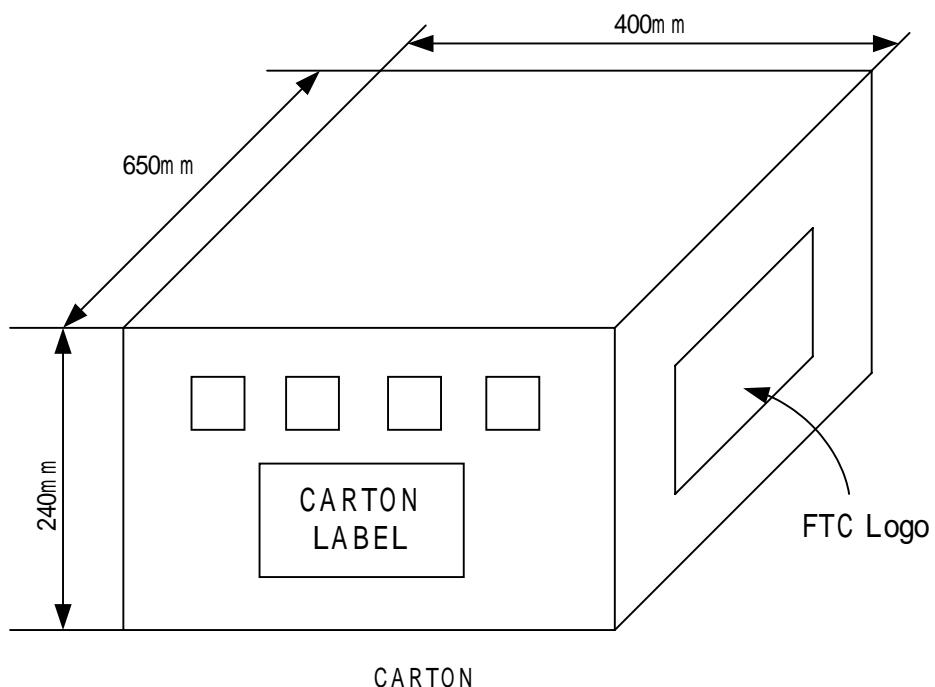
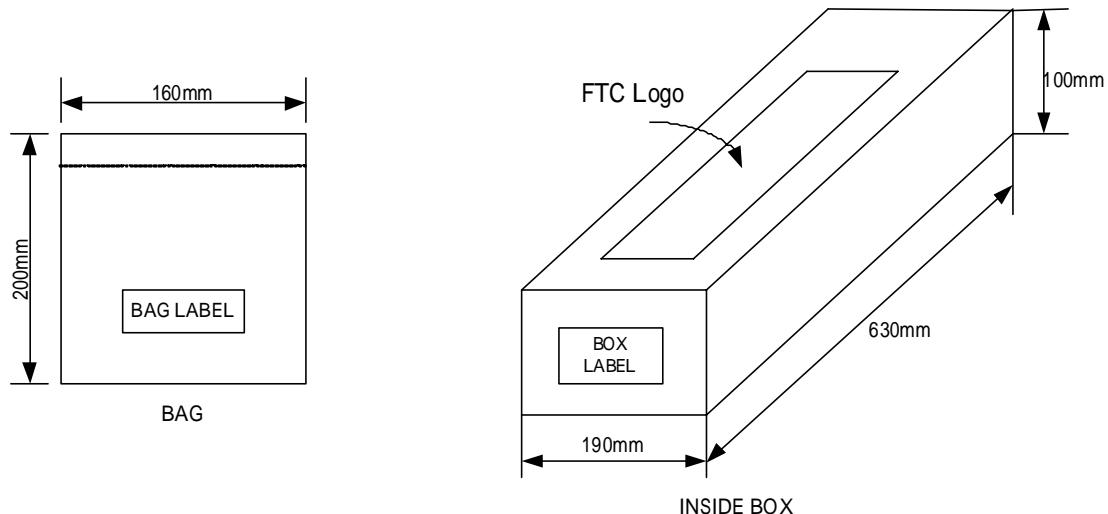


Fig 5 Application Circuit



**PACKAGE OUTLINE**


**PACKING SPECIFICATIONS**
**BAG & BOX DIMENSION**

**PACKING QUANTITY SPECIFICATIONS**

1000 EA/1 BAG

25 BAGS/1 INSIDE BOX

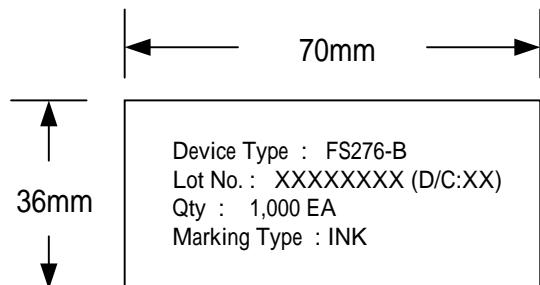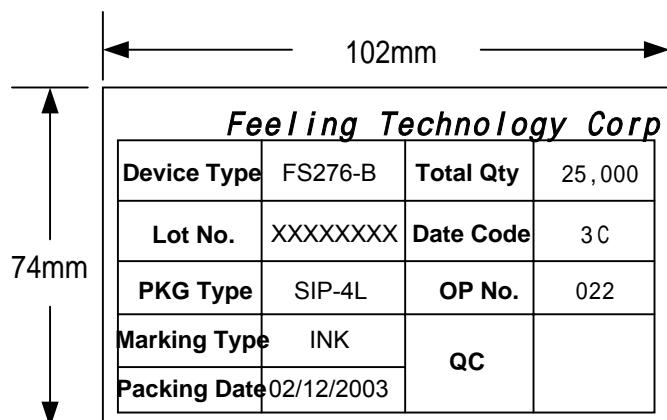4 INSIDE BOXES/1 CARTON

**LABEL SPECIFICATIONS**

**BAG LABEL**

**INSIDE BOX & CARTON LABEL**
**ORDER INFORMATION**

Part Number	Operating Temperature	Package	Description
FS276-A	-20 ~ +100	TO-92SP-4	±65G (B)
FS276-B	-20 ~ +100	TO-92SP-4	±80G (B)