
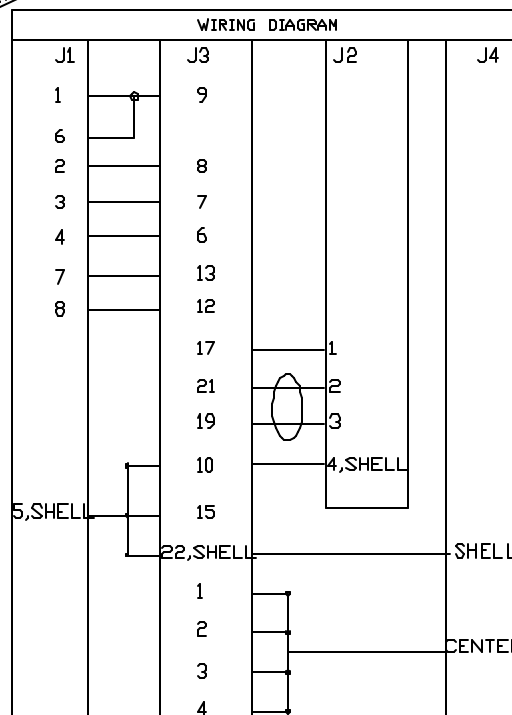


REV.	ECN.	NO.	APPD.
X1			
X2			
X3			

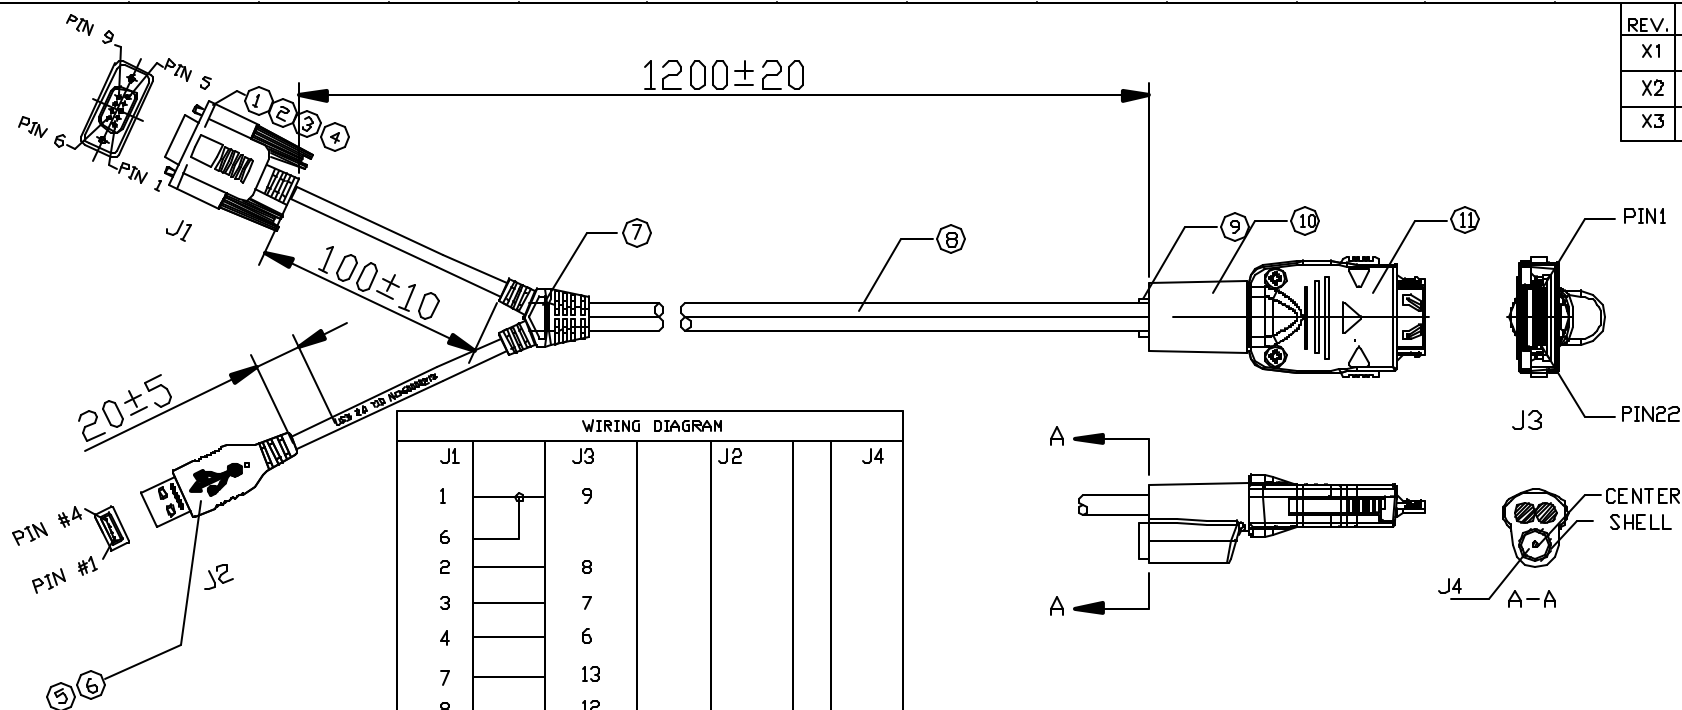

#### NOTES:

#### 1. SPECIFICATION:

- 1.1. OPERATING VOLTAGE: 30 VDC.
- 1.2. OPERATING CURRENT: 1 AMP
- 1.3. OPERATING TEMPERATURE: -20°C TO 85°C
2. INSULATION RESISTANCE: 2M OHMS/500 VDC.
3. CONTACT RESISTANCE: 5 OHMS

#### 4. COMBINE CABLE:

- COMPONENT 1: 28AWG 6 WIRE, AL-FOIL MYLAR, DRAIN WIRE 26AWG BRAID85%, JACKET PVC, COLOR BLACK, O.D. Ø4.5mm MAX.
- COMPONENT 2: 28AWGx1P+26AWGx2C, AL-MYLAR, DRAIN 28AWG, BRAID, JACKET PVC, COLOR BLACK, O.D. Ø4.5mm MAX.

#### 5. PAD PRINTING: USB 2.0 TID NO:60000213

#### 6. CABLE TERMINATION: THE COPPER BRAID SHIELD SHALL BE TO THE CONNECTOR SHELL AT BOTH ENDS. OPEN/SHORT TEST SHOULD DONE 100%.

11	22PIN STARTAC PLUG	1	QV00223-A01	30 U" GOLD PLATING AT CONTACT AREA
10	SR	1	901-0101-024	PVC, UL 94V-0 COLOR BLACK
9	DC JACK	1	T8D	4.0x1.7mm, NI PLATING
8	COMBINE CABLE	A/R	T8D	SHOW AS
7	STRAIN RELIEF	1	T8D	PVC, UL 94V-0 COLOR BLACK
6	USB A TYPE PLUG CONN	1	UB2010C-07	COLOR BLACK
5	USB A TYPE OVERMOLD	1	005-0000-003	PVC, UL 94V-0 COLOR BLACK
4	D-SUB 9PIN OVERMOLD	1	003-0000-310	PVC, UL 94V-0 COLOR BLACK
3	THUMB SCREW	2	060-0002-311	#4-40 UNC, MOLII COLOR JU-22X
2	D-SUB 9PIN PREMOLD	1	003-P000-510	PE, UL 94V-0
1	D-SUB 9PIN FEMALE CONN.	1	070-1111-216	
NO	DESCRIPTION	Q'TY	P/N	REMARK
X ±	X' ±	UNITS [INCH [mm]]	NAME (INTENDED USE)	<b>FOXCONN</b> HON HAI PRECISION IND. CO., LTD. TAIPEI, TAIWAN, R.O.C.
.X ±	.X' ±	MAT'L	CUSTOMER HTC	
.XX ±	.XX' ±	FINISH	PART NO. (INTENDED USE)	TITLE: STARTIC 22PIN PLUG TO D-SUB 9PIN & USB CABLE ASSY
.XXX ±	.XXX' ±		QV22D04UBD4-24	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.		APPD:	CHKD:	DWG NO:
		Q'TY	DR: DAVID HUANG 7/25/01	
				SCALE SHEET REV. NONE 1/1 X3