


Common Cathode Fast Recovery Epitaxial Diode (FRED)


DSEK 60

$I_{FAVM} = 2 \times 34 \text{ A}$
 $V_{RRM} = 200 \text{ V}$
 $t_{rr} = 35 \text{ ns}$


| V_{RSM} V | V_{RRM} V | Type |
|----------------|----------------|--------------|
| 200 | 200 | DSEK 60-02A |
| 200 | 200 | DSEK 60-02AR |



TO-247 AD
Version A



ISOPLUS 247™
Version AR



A = Anode, C = Cathode

* Patent pending

| Symbol | Test Conditions | Maximum Ratings per leg | |
|---|--|-------------------------|--|
| I_{FRMS} I_{FAVM} ① I_{FRM} | $T_{VJ} = T_{VJM}$ $T_C = 115^\circ\text{C}$; rectangular, $d = 0.5$ $t_p < 10 \mu\text{s}$; rep. rating, pulse width limited by T_{VJM} | 50 34 375 | A A A |
| I_{FSM} | $T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine | 325 350 | A A |
| | $T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine | 290 310 | A A |
| P_t | $T_{VJ} = 45^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine | 530 510 | A^2s A^2s |
| | $T_{VJ} = 150^\circ\text{C}$; $t = 10 \text{ ms}$ (50 Hz), sine $t = 8.3 \text{ ms}$ (60 Hz), sine | 420 400 | A^2s A^2s |
| T_{VJ} | | -40...+150 | $^\circ\text{C}$ |
| T_{VJM} | | 150 | $^\circ\text{C}$ |
| T_{stg} | | -40...+150 | $^\circ\text{C}$ |
| P_{tot} | $T_C = 25^\circ\text{C}$ | 125 | W |
| M_d^* F_C | Mounting torque mounting force with clip | 0.8...1.2 20...120 | Nm N |
| V_{ISOL}^{**} | 50/60 Hz, RMS, $t = 1 \text{ minute}$, leads-to-tab | 2500 | V~ |
| Weight | | 6 | g |

* Version A only; ** Version AR only

| Symbol | Test Conditions | Characteristic Values per leg | |
|--------------------------|--|-------------------------------|--------------------------------------|
| | | typ. | max. |
| I_R | $T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ $T_{VJ} = 25^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ $T_{VJ} = 125^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$ | 200 50 5 | μA μA mA |
| V_F | $I_F = 30 \text{ A}$; $T_{VJ} = 150^\circ\text{C}$ $T_{VJ} = 25^\circ\text{C}$ | 0.85 1.10 | V V |
| V_{T0} r_T | For power-loss calculations only $T_{VJ} = T_{VJM}$ | 0.72 4.2 | V $\text{m}\Omega$ |
| R_{thJC} R_{thCH} | | 1 0.25 | K/W K/W |
| t_{rr} | $I_F = 1 \text{ A}$; $-di/dt = 100 \text{ A}/\mu\text{s}$; $V_R = 30 \text{ V}$; $T_{VJ} = 25^\circ\text{C}$ | 35 | ns |
| I_{RM} | $V_R = 100 \text{ V}$; $I_F = 30 \text{ A}$; $-di_F/dt = 100 \text{ A}/\mu\text{s}$ $L \leq 0.05 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$ | 4 | A |

① I_{FAVM} rating includes reverse blocking losses at T_{VJM} , $V_R = 0.8 V_{RRM}$, duty cycle $d = 0.5$
 Data according to IEC 60747 refer to a single diode unless otherwise stated.
 IXYS reserves the right to change limits, test conditions and dimensions

Features

- International standard package JEDEC TO-247 AD
- Planar passivated chips
- Very short recovery time
- Extremely low switching losses
- Low I_{RM} -values
- Soft recovery behavior
- Epoxy meets UL 94V-0
- Version AR isolated and UL registered E153432

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Ultrasonic cleaners and welders

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses
- Operating at lower temperature or space saving by reduced cooling

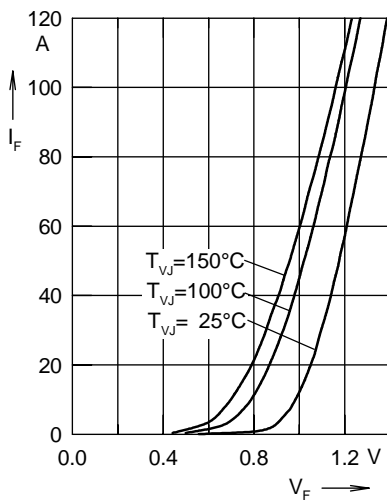


Fig. 1 Forward current I_F versus V_F

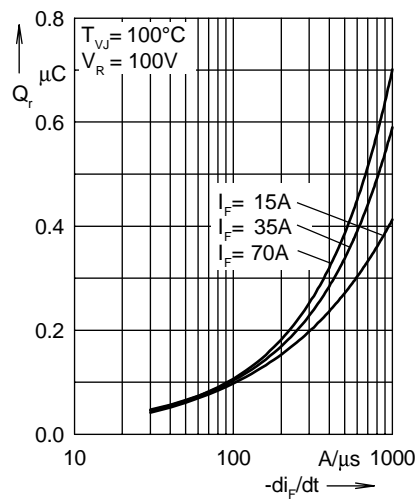


Fig. 2 Typ. reverse recovery charge Q_r versus $-di_F/dt$

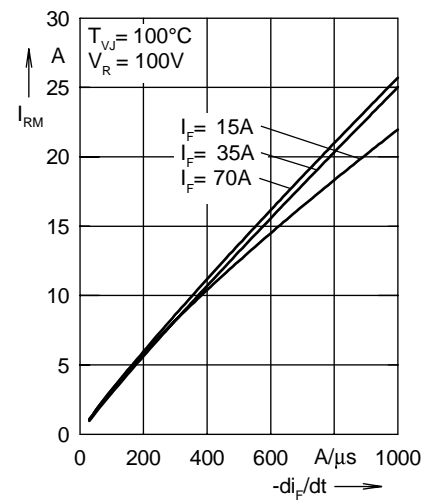


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

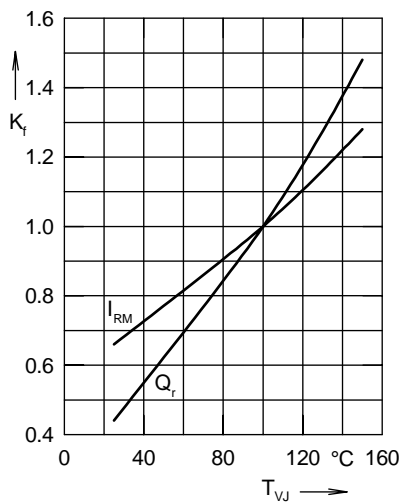


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

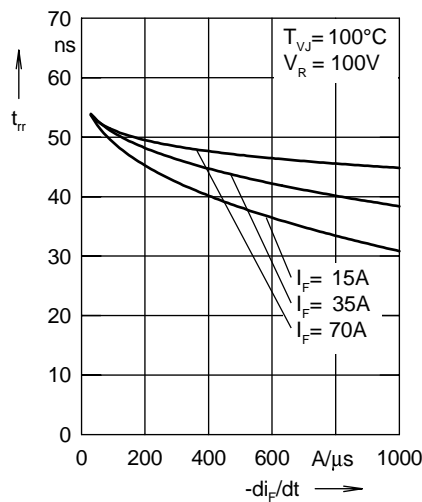


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

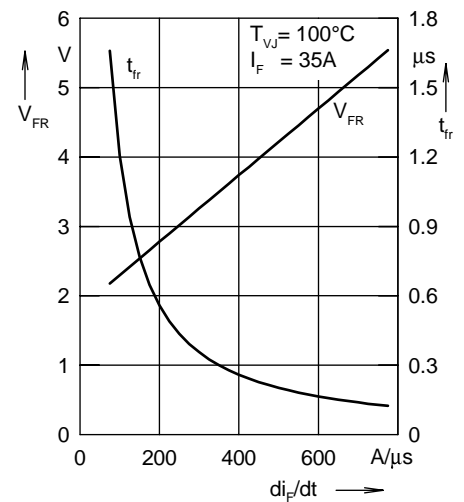


Fig. 6 Typ. peak forward voltage V_{FR} and t_{fr} versus di_F/dt


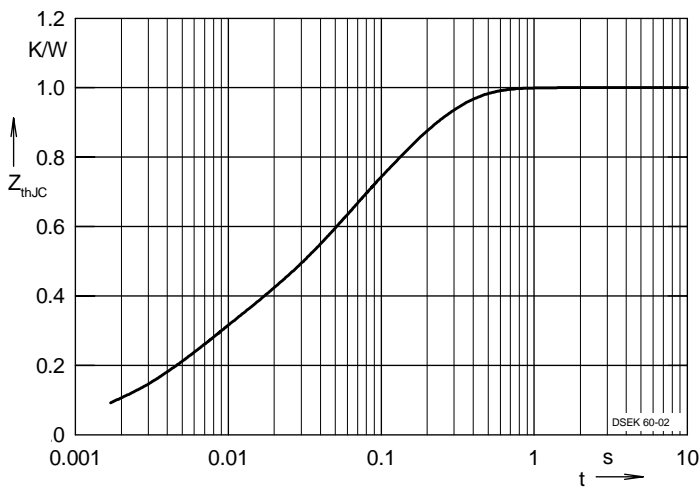


Fig. 7 Transient thermal impedance junction to case

Dimensions

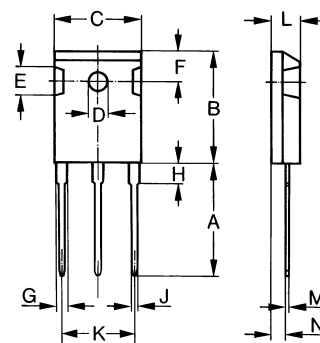

| Dim. | Millimeter | | Inches | |
|------|------------|-------|--------|-------|
| | Min. | Max. | Min. | Max. |
| A | 19.81 | 20.32 | 0.780 | 0.800 |
| B | 20.80 | 21.46 | 0.819 | 0.845 |
| C | 15.75 | 16.26 | 0.610 | 0.640 |
| D* | 3.55 | 3.65 | 0.140 | 0.144 |
| E | 4.32 | 5.49 | 0.170 | 0.216 |
| F | 5.4 | 6.2 | 0.212 | 0.244 |
| G | 1.65 | 2.13 | 0.065 | 0.084 |
| H | - | 4.5 | - | 0.177 |
| J | 1.0 | 1.4 | 0.040 | 0.055 |
| K | 10.8 | 11.0 | 0.426 | 0.433 |
| L | 4.7 | 5.3 | 0.185 | 0.209 |
| M | 0.4 | 0.8 | 0.016 | 0.031 |
| N | 2.2 | 2.54 | 0.087 | 0.102 |

* ISOPLUS 247™ without hole