

VENTILÁTORY A JEJICH PŘÍSLUŠENSTVÍ

V	
Ventilátory plastové s kruhovými ložisky	16-3-16-4
Rozměry 40x40x10mm, kružná ložiska	16-3
Rozměry 40x40x20mm, kružná ložiska	16-2
Rozměry 50x50x10mm, kružná ložiska	16-2
Rozměry 50x50x15mm, kružná ložiska	16-3
Rozměry 50x50x20mm, kružná ložiska	16-3
Rozměry 50x50x25mm, kružná ložiska	16-3-16-4
Rozměry 60x60x20mm, kružná ložiska	16-4
Rozměry 60x60x25mm, kružná ložiska	16-4
Rozměry 120x120x25mm, kružná ložiska	16-5-16-6
Rozměry 120x120x30mm, kružná ložiska	16-5-16-6
Ventilátory plastové s kulčkovými ložisky	16-4-16-5

Rozměry 25x25x10mm, kulčková ložiska	16-4
Rozměry 40x40x10mm, kulčková ložiska	16-4
Rozměry 40x40x25mm, kulčková ložiska	16-7
Rozměry 60x60x25mm, kulčková ložiska	16-7
Rozměry 90x90x25mm, kulčková ložiska	16-7
Rozměry 120x120x25mm, kulčková ložiska	16-8
Rozměry 120x120x30mm, kulčková ložiska	16-8
Příslušenství k ventilátorům	16-8-16-10
Filtry vhodné pro ventilátory	16-10
Kabely a konektory pro připojení ventilátorů	16-9
Ochranné sítky pro ventilátory, kovové	16-9
Ochranné sítky pro ventilátory, plastové	16-10
Regulátory otáček ventilátorů	16-10



VENTILÁTORY A JEJICH PŘÍSLUŠENSTVÍ
Dodací podmínky, balící jednotky, ceny
a technické parametry jednotlivých
komponentů sdělíme na vyžádání

SUNON

DES-ELECTRONICS distribuuje kompletní sortiment ventilátorů SUNON




Ventilátory přístrojové s kluznými ložisky

Rozměry 40x40x10mm, kluzná ložiska

KDE1204PFS2-8 i GES 071 000 02

Ventilátor SUNON 12VDC/0,6W, 6000ot, 9,5m³/h, 28dB, 40x40x10mm, 16g

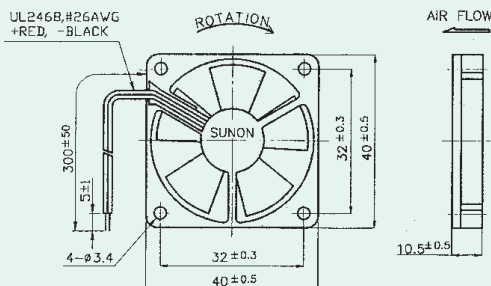


TECHNICAL PARAMETERS:	
Dimension	40x40x10
Mounting hole spacing	32mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,05A
Power consumption	0,6W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	6000 RPM
Air flow	9,5m ³ /h
Noise	28dB
Weight	16g
Frame	non-flammable thermoplastic

Rozměry 40x40x20mm, kluzná ložiska

KDE1204PKS2 i GES 071 000 05

Ventilátor SUNON 12VDC/0,9W, 6000ot, 11m³/h, 25,5dB, 40x40x20mm, 28g

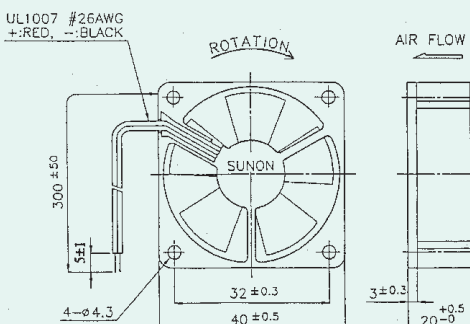


TECHNICAL PARAMETERS:	
Dimension	40x40x20
Mounting hole spacing	32mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,07A
Power consumption	0,9W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	6000 RPM
Air flow	11,0m ³ /h
Noise	25,5dB
Weight	28g
Frame	non-flammable thermoplastic

Rozměry 50x50x10mm, kluzná ložiska

KDE1205PFS2-8 i GES 071 000 06

Ventilátor SUNON 12VDC/0,7W, 4300ot, 14m³/h, 29dB, 50x50x10mm, 24g

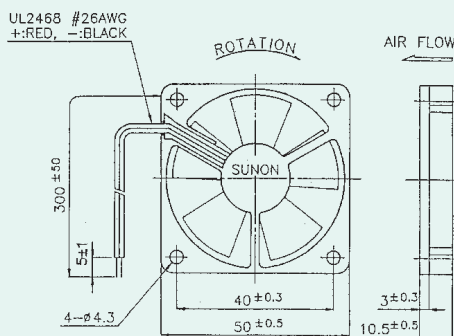


TECHNICAL PARAMETERS:	
Dimension	50x50x10
Mounting hole spacing	40mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,06A
Power consumption	0,7W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	4300 RPM ± 700RPM
Air flow	14,0m ³ /h
Noise	29dB
Weight	24g
Frame	non-flammable thermoplastic

Rozměry 60x60x15mm, kluzná ložiska

KDE1206PHS2 i GES 071 000 09

Ventilátor SUNON 12VDC/1,9W, 4000ot, 30m³/h, 31dB, 60x60x15mm, 45g

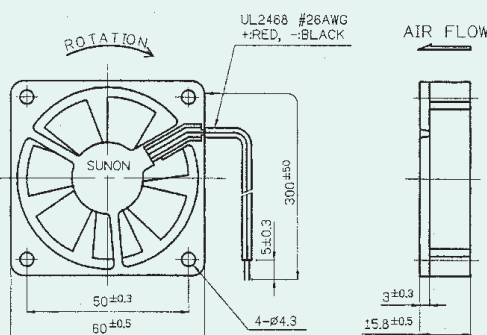

TECHNICAL PARAMETERS:	
Dimension	60x60x15
Mounting hole spacing	50mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,16A
Power consumption	1,9W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	4000 RPM
Air flow	30m ³ /h
Noise	31dB
Weight	45g
Frame	non-flammable thermoplastic


Rozměry 60x60x25mm, kluzná ložiska

KDE1206PTS1 i GES 071 000 10

Ventilátor SUNON 12VDC/2,3W, 4300ot, 38m³/h, 34dB, 60x60x25mm, 60g

KDE2406PTS1 GES 071 023 16

Ventilátor SUNON 24VDC/2,6W, 4300ot, 38m³/h, 34dB, 60x60x25mm, 60g

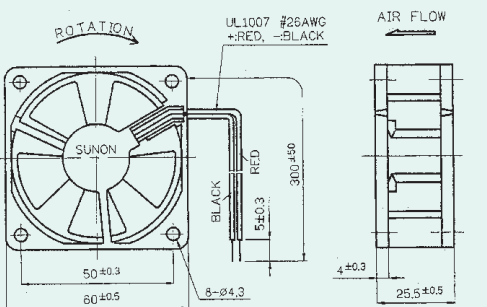

TECHNICAL PARAMETERS:	
Dimension	60x60x25
Mounting hole spacing	50mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,19A
Power consumption	2,3W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	4300 RPM
Air flow	38m ³ /h
Noise	34dB
Weight	60g
Frame	non-flammable thermoplastic

Rozměry 80x80x25mm, kluzná ložiska


KDE1208PTS1-6 i GES 071 000 11

Ventilátor SUNON 12VDC/2,6W, 3000ot, 71m³/h, 34dB, 80x80x25mm, 123g



KDE1208PTS3-6 i GES 071 000 14

Ventilátor SUNON 12VDC/1,6W, 2300ot, 51m³/h, 25dB, 80x80x25mm, 123g

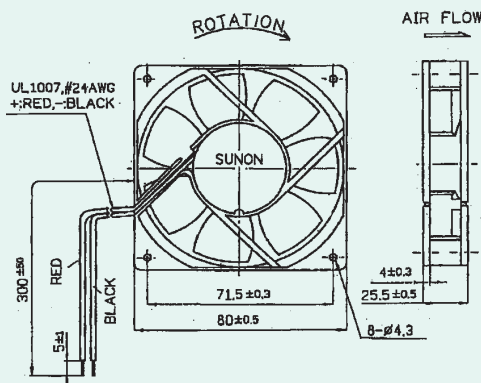


KDE1208PTS1	
TECHNICAL PARAMETERS:	
Dimension	80x80x25
Mounting hole spacing	71,5mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,22A
Power consumption	2,6W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	3000 RPM
Air flow	51m ³ /h
Noise	25dB
Weight	123g
Frame	non-flammable thermoplastic
Terminals	lead wire

KDE1208PTS3	
TECHNICAL PARAMETERS:	
Dimension	80x80x25
Mounting hole spacing	71,5mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,13A
Power consumption	1,6W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2300 RPM
Air flow	51m ³ /h
Noise	25dB
Weight	123g
Frame	non-flammable thermoplastic

SF23080AT-2082HSL

i GES 071 000 17

Ventilátor SUNON 230VAC/14VA, 2300ot, 34m³/h, 32dB, 80x80x25mm, 260g

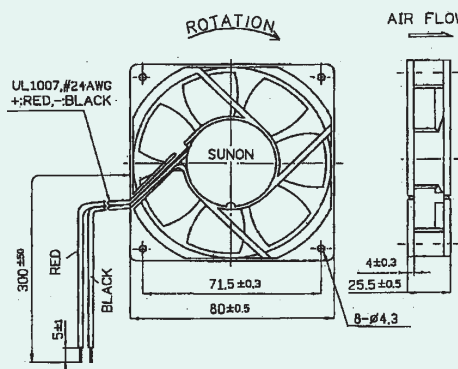


TECHNICAL PARAMETERS:	
Dimension	80x80x25
Mounting hole spacing	71,5mm
Bearing	sleeve
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,07A
Power consumption	14VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2300 RPM
Air flow	34m³/h
Noise	32dB
Weight	260g
Frame	non-flammable thermoplastic
Terminals	lead wire

Rozměry 80x80x38mm, kluzná ložiska

SF23080A-2083HSL

i GES 071 000 18

Ventilátor 230VAC/14VA; 2300ot; 45m³/h; 34dB; 80x80x38mm; 340g; SUNON

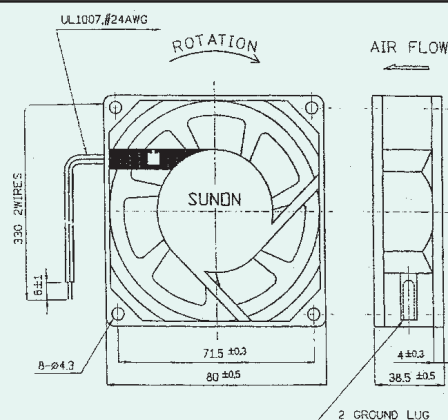


TECHNICAL PARAMETERS:	
Dimension	80x80x38
Mounting hole spacing	71,5mm
Bearing	sleeve
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,07A
Power consumption	14VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2300 RPM
Air flow	45m³/h
Noise	34dB
Weight	340g
Frame	non-flammable thermoplastic
Terminals	lead wire

Rozměry 92x92x25mm, kluzná ložiska

KDE1209PTS1-6

i GES 071 000 19

Ventilátor SUNON 12VDC/3,0W, 2700ot, 83m³/h, 33,8dB, 92x92x25mm, 128g

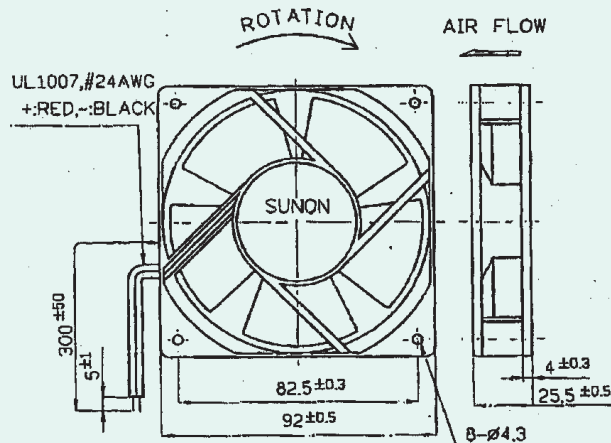

SF23092A-2092HSL

i GES 071 000 22

Ventilátor SUNON 230VAC/14VA, 2250ot, 55m³/h, 38dB, 92x92x25mm, 280g



KDE1209PTS1	
TECHNICAL PARAMETERS:	
Dimension	92x92x25
Mounting hole spacing	82,5mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,25A
Power consumption	3,0W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2700 ot./min.
Air flow	83m³/h
Noise	34dB
Weight	128g
Frame	non-flammable thermoplastic

SF23092A-2092HSL	
TECHNICAL PARAMETERS:	
Dimension	92x92x25
Mounting hole spacing	82,5mm
Bearing	sleeve
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,07A
Power consumption	14VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2250 RPM
Air flow	55m³/h
Noise	38dB
Weight	280g
Frame	non-flammable thermoplastic
Terminals	lead wire

Rozměry 120x120x25mm, kluzná ložiska


KDE1212PTS1-6A i GES 071 000 23

Ventilátor SUNON 12VDC/4,6W, 3000ot, 150m³/h, 44dB, 120x120x25mm, 200g



DP201AT-2122HSL i GES 071 000 24

Ventilátor SUNON 230VAC/19VA, 2100ot, 120m³/h, 44dB, 120x120x25mm, 550g

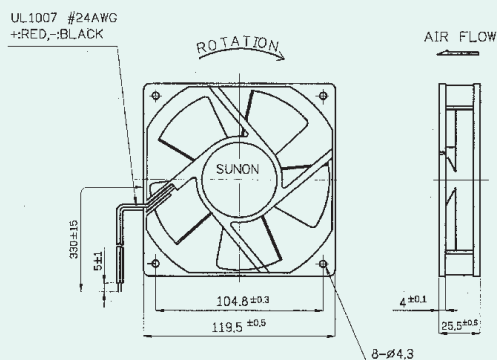

KDE1212PTS1-6A

TECHNICAL PARAMETERS:	
Dimension	120x120x25
Mounting hole spacing	105,5mm
Bearing	sleeve
Rating voltage	12VDC ± 15%
Power current	0,38A
Power consumption	4,6W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	3000 RPM
Air flow	149m ³ /h
Noise	44dB
Weight	200g
Frame	non-flammable thermoplastic

DP201AT-2122HSL

TECHNICAL PARAMETERS:	
Dimension	120x120x25
Mounting hole spacing	105,5mm
Bearing	sleeve
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,09A
Power consumption	19VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2100 RPM
Air flow	120m ³ /h
Noise	44dB
Weight	330g
Frame	aluminium
Terminals	lead wire

Rozměry 120x120x38mm, kluzná ložiska


DP200A-2123XSL i GES 071 000 26

Ventilátor SUNON 230VAC/22VA, 2700ot, 161m³/h, 44dB, 120x120x38mm, 550g



DP200A-2123XST i GES 071 000 27

Ventilátor SUNON 230VAC/22VA, 2700ot, 161m³/h, 44dB, 120x120x38mm, 550g

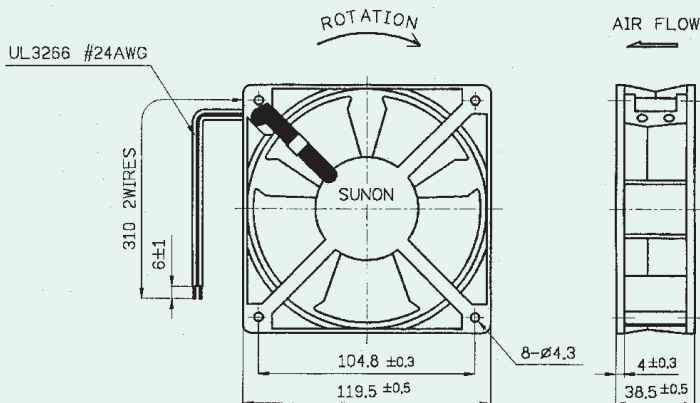

DP200A-2123XSL


TECHNICAL PARAMETERS:	
Dimension	120x120x38
Mounting hole spacing	104mm
Bearing	sleeve
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,13A
Power consumption	22VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2700 RPM
Air flow	178m ³ /h
Noise	46dB
Weight	550g
Frame	aluminium
Terminals	lead wire

DP200A-2123XST

TECHNICAL PARAMETERS:	
Dimension	120x120x38
Mounting hole spacing	104mm
Bearing	sleeve
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,13A
Power consumption	22VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2700 RPM
Air flow	178m ³ /h
Noise	46dB
Weight	550g
Frame	aluminium
Terminals	terminal

www.ges.cz - aktuální informace - www.ges.cz - akční nabídky - www.ges.cz - internetový obchod - www.ges.cz - zákaznická podpora - www.ges.cz

DP203A-2123LSL **i** GES 071 000 28
Ventilátor SUNON 230VAC/11VA, 2000ot, 118m³/h, 36dB, 120x120x38mm, 550g

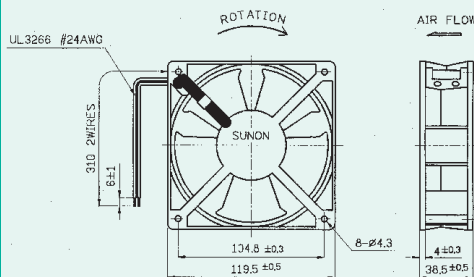


TECHNICAL PARAMETERS:	
Dimension	120x120x38
Mounting hole spacing	104mm
Bearing	sleeve
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,06A
Power consumption	11VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2000 RPM
Air flow	113m ³ /h
Noise	34dB
Weight	550g
Frame	aluminium
Terminals	lead wire

Ventilátory přístrojové s kuličkovými ložisky

Rozměry 25x25x10mm, kuličková ložiska

KDE1202PFB2-8 **i** GES 071 000 29
Vent. kuličkový SUNON 12VDC/0,7W, 10000ot, 3,4m³/h, 30dB, 25x25x10mm

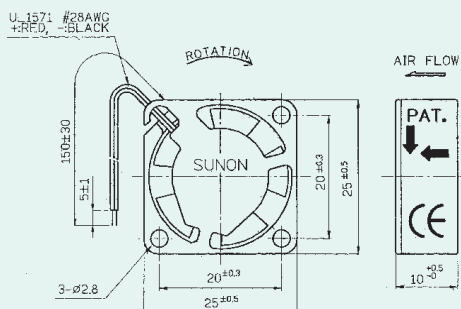


TECHNICAL PARAMETERS:	
Dimension	25x25x10
Mounting hole spacing	50mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,06A
Power consumption	0,7W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	10000 RPM
Air flow	3,4m ³ /h
Noise	30dB
Weight	7g
Frame	non-flammable thermoplastic

Rozměry 40x40x10mm, kuličková ložiska

KDE0504PFB2-8 **i** GES 071 023 17
Vent. kuličkový SUNON 5VDC/0,9W, 6500ot, 11m³/h, 26dB, 40x40x10mm



KDE1204PFB3 **i** GES 071 000 97
Vent. kuličkový SUNON 12VDC/0,5W, 5300ot, 8,1m³/h, 23dB, 40x40x10mm

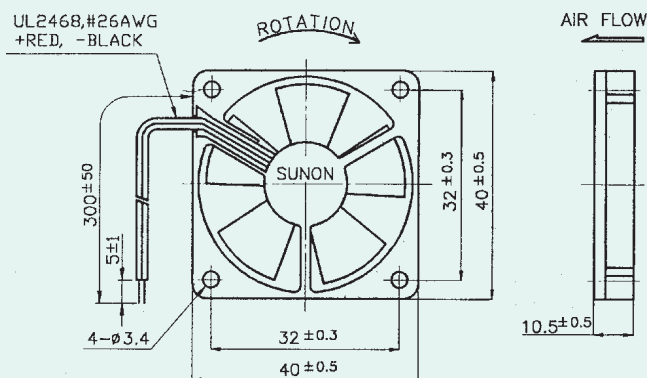

KDE1204PFB1-8 **i** GES 071 000 31
Vent. kuličkový SUNON 12VDC/0,6W, 6100ot, 10m³/h, 28dB, 40x40x10mm



KDE1204PFB3	
TECHNICAL PARAMETERS:	
Dimension	40x40x10
Mounting hole spacing	32mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,04A
Power consumption	0,5W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	5300 RPM
Air flow	8,0m ³ /h
Noise	23,5dB
Weight	16g
Frame	non-flammable thermoplastic

KDE1204PFB1-8	
TECHNICAL PARAMETERS:	
Dimension	40x40x10
Mounting hole spacing	32mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,06A
Power consumption	0,7W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	7300 RPM
Air flow	11,7m ³ /h
Noise	30,5dB
Weight	16g
Frame	non-flammable thermoplastic

Ceny a slevy jsou uvedeny v našem aktuálním ceníku, na našich webových stránkách anebo v aktuálním GES CD-KATALOGU.


i - více informací na www.ges.cz nebo v aktuálním GES CD-KATALOGU **o** - doprodej Změna sortimentu vyhrazena.

Rozměry 40x40x20mm, kuličková ložiska

KDE0504PKB2

i GES 071 000 33

Vent. kuličkový SUNON 5VDC/1,0W, 6500ot, 12m3/h, 29dB, 40x40x20mm

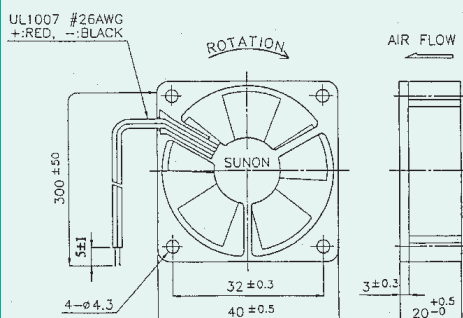


TECHNICAL PARAMETERS:	
Dimension	40x40x20
Mounting hole spacing	32mm
Bearing	ball
Rating voltage	5VDC ± 15%
Power current	0,21A
Power consumption	1,0W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-20°C - +80°C
Storage temperature	-40°C - +80°C
Speed	6500 RPM
Air flow	12,0m³/h
Noise	26,5dB
Weight	20g
Frame	non-flammable thermoplastic

Rozměry 60x60x25mm, kuličková ložiska

KDE1206PTB1

i GES 071 000 34

Vent. kuličkový SUNON 12VDC/2,3W, 4500ot, 40m3/h, 34dB, 60x60x25mm

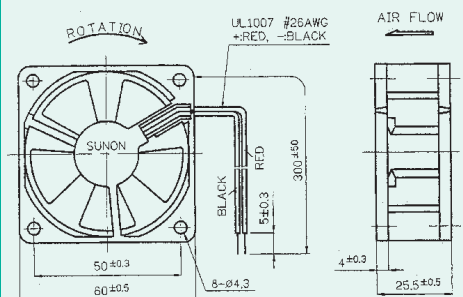


TECHNICAL PARAMETERS:	
Dimension	60x60x25
Mounting hole spacing	50mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,19A
Power consumption	2,3W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	4500 RPM
Air flow	40m³/h
Noise	34dB
Weight	60g
Frame	non-flammable thermoplastic

Rozměry 80x80x25mm, kuličková ložiska

KDE1208PTB1-6

i GES 071 000 35

Vent. kuličkový SUNON 12VDC/2,6W, 3200ot, 72m3/h, 36dB, 80x80x25mm

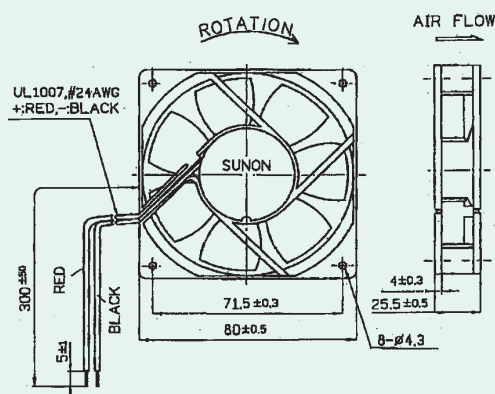

KDE1208PTB1-6

TECHNICAL PARAMETERS:

Dimension	80x80x25
Mounting hole spacing	71,5mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,22A
Power consumption	2,64W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	3200 RPM
Air flow	72m³/h
Noise	36,5dB
Weight	123g
Frame	non-flammable thermoplastic

KDE1208PTB1-6AF

TECHNICAL PARAMETERS:

Dimension	80x80x25
Mounting hole spacing	71,5mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,20A
Power consumption	2,3W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	3000 RPM
Air flow	72m³/h
Noise	34dB
Weight	100g
Frame	non-flammable thermoplastic

KDE1208PTB1-6AF

i GES 071 000 36

Vent. kuličkový SUNON 12VDC/2,6W, 3200ot, 72m3/h, 36dB, 80x80x25mm



Rozměry 92x92x25mm, kuličková ložiska


KDE1209PTB1-6AF i GES 071 000 40

Vent. kuličkový SUNON 12VDC/3,0W, 2800ot, 85m³/h, 34dB, 92x92x25mm



KDE1209PTB1-6 i GES 071 000 41

Vent. kuličkový SUNON 12VDC/2,3W, 2700ot, 85m³/h, 35dB, 92x92x25mm

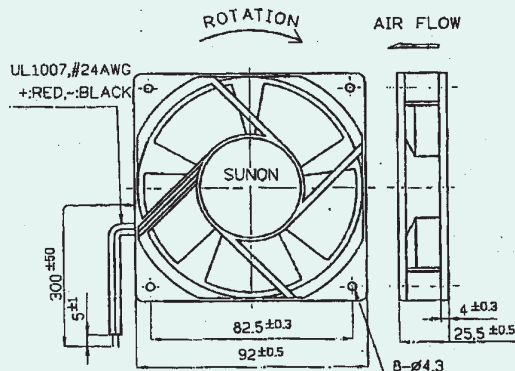

KDE1209PTB1-6AF

TECHNICAL PARAMETERS:	
Dimension	92x92x25
Mounting hole spacing	82,5mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,24A
Power consumption	2,9W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	3000 RPM
Air flow	87m ³ /h
Noise	37dB
Weight	121g
Frame	non-flammable thermoplastic


KDE1209PTB1

TECHNICAL PARAMETERS:	
Dimension	92x92x25
Mounting hole spacing	82,5mm
Bearing	ball
Rating voltage	12VDC ± 15%
Power current	0,23A
Power consumption	2,3W
Insulation resistance	min. 500MΩ
Dielectric strength	600VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	2700 RPM
Air flow	85m ³ /h
Noise	35dB
Weight	128g
Frame	non-flammable thermoplastic

Rozměry 120x120x38mm, kuličková ložiska

DP200A-2123XBL i GES 071 000 46

Vent. kuličkový SUNON 230VAC/22W, 3000ot, 182m³/h, 48dB, 120x120x38mm

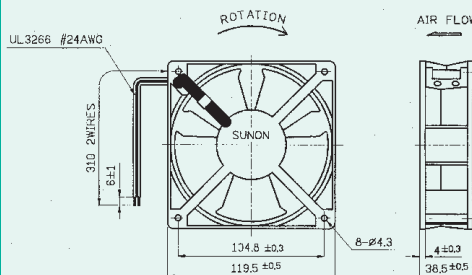

TECHNICAL PARAMETERS:

Dimension	120x120x38
Mounting hole spacing	104mm
Bearing	ball
Rating voltage	230VAC (185VAC - 245VAC)
Power current	0,13A
Power consumption	22VA
Insulation resistance	min. 500MΩ
Dielectric strength	1500VAC / 1min.
Operating temperature	-10°C - +70°C
Storage temperature	-40°C - +70°C
Speed	3000 RPM
Air flow	182m ³ /h
Noise	48dB
Weight	550g
Frame	aluminium

Příslušenství k ventilátorům

Kabely s konektory pro připojení ventilátorů

A2-10 GES 071 000 50


Kabel pro připojení ventilátoru, délka 1m



Ochranné mřížky pro ventilátory, kovové

FG 04 GES 071 000 55


Mřížka k ventilátoru 40 x 40 mm kovová

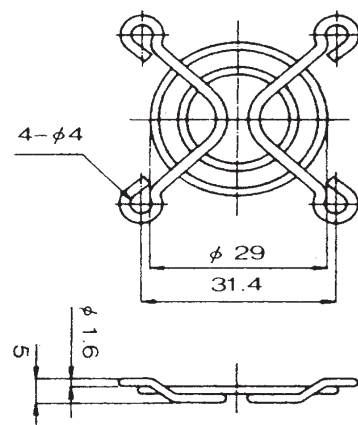

www.ges.cz - aktuální informace - www.ges.cz - akční nabídky - www.ges.cz - internetový obchod - www.ges.cz - zákaznická podpora- www.ges.cz


FG 05 GES 071 000 56

Mřížka k ventilátoru 50 x 50 mm kovová

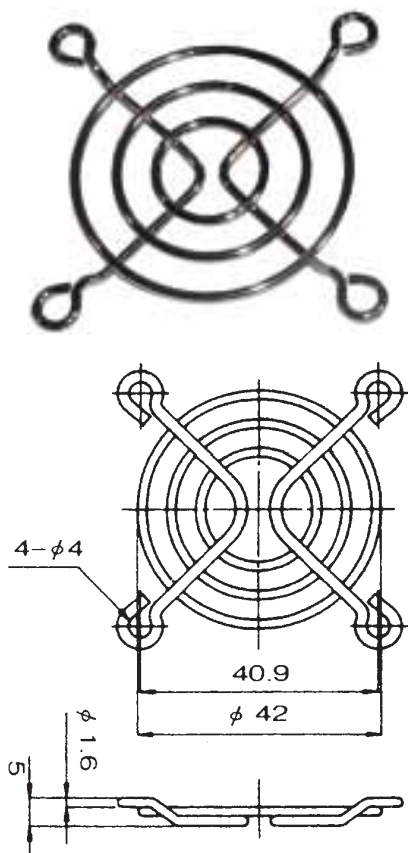


FG 06 GES 071 000 57

Mřížka k ventilátoru 60 x 60 mm kovová

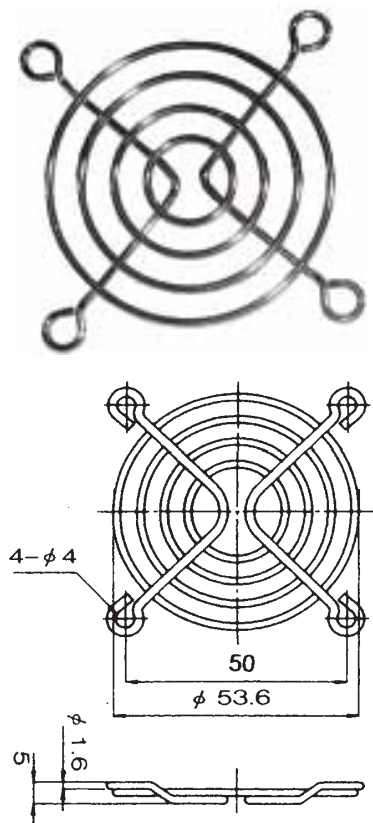


FG 08 GES 071 000 58

Mřížka k ventilátoru 80 x 80 mm kovová

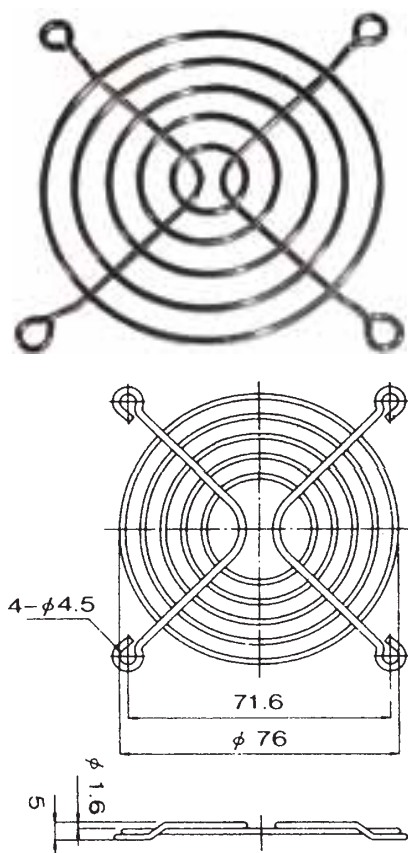


FG 09 GES 071 000 59

Mřížka k ventilátoru 92 x 92 mm kovová

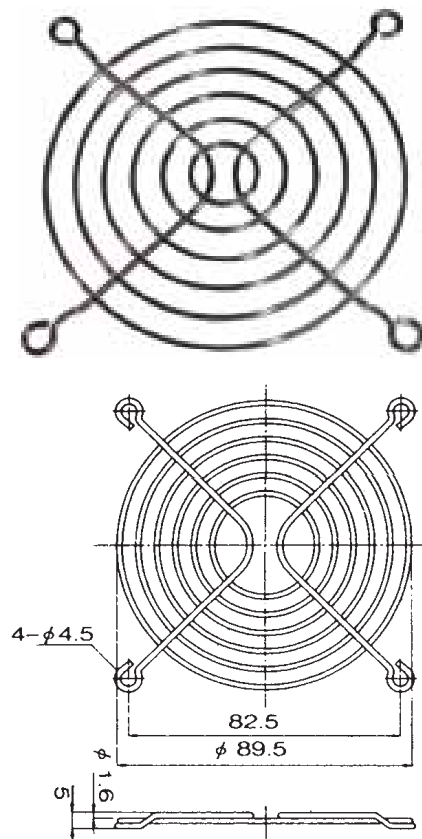

FG 12 GES 071 000 60


Mřížka k ventilátoru 120 x 120 mm kovová

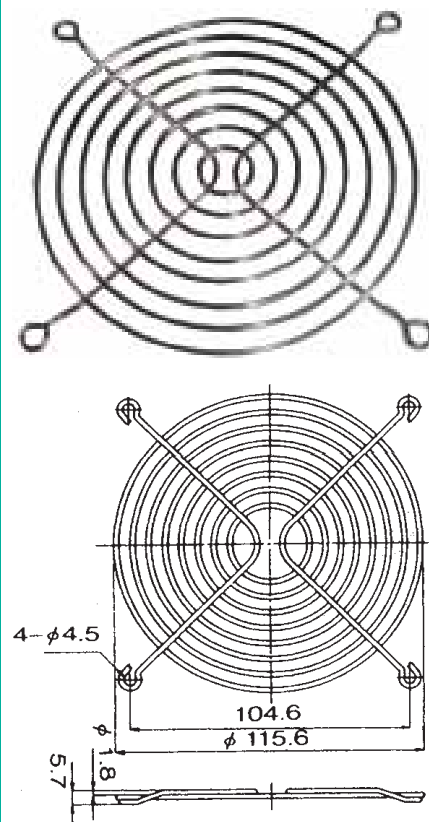

Ochranné mřížky pro ventilátory, plastové

PB 06 GES 071 001 02


Mřížka k ventilátoru 60 x 60 mm, plast

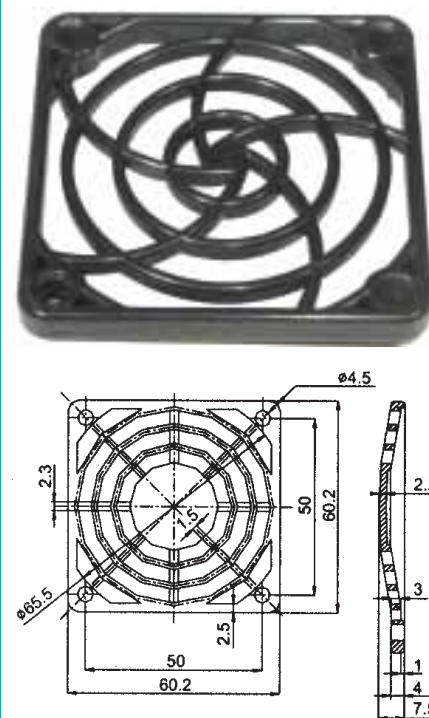

PB 08

GES 071 000 62


Mřížka k ventilátoru 80 x 80 mm, plast

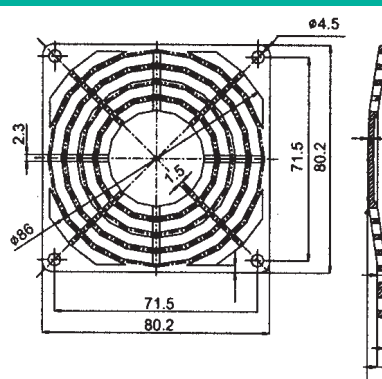


PB 12

GES 071 000 64


Mřížka k ventilátoru 120 x 120 mm, plast

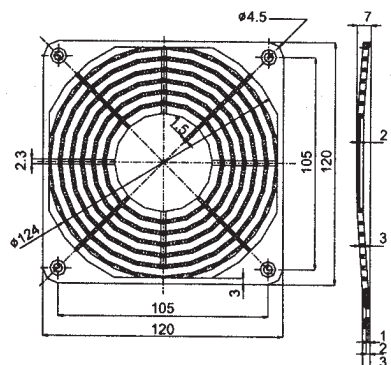


Objednávací kód ventilátorů SUNON typu KDE (KD)

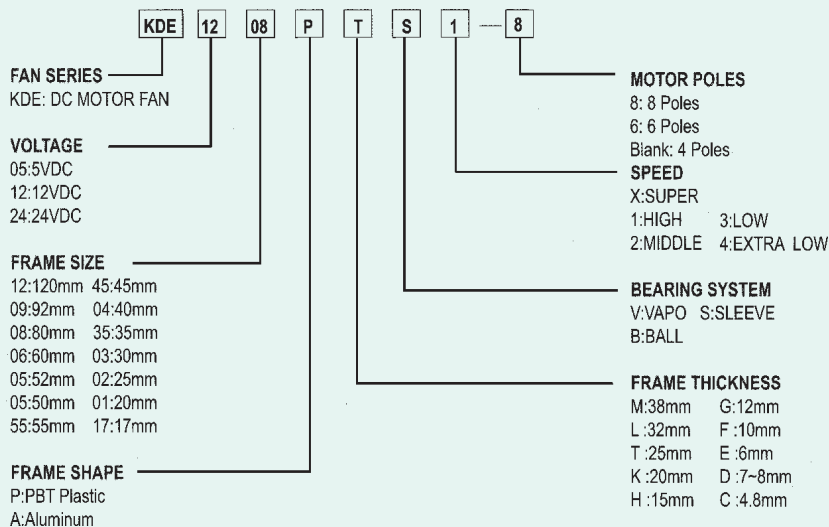

Objednávací kód axiálních střídavých ventilátorů SUNON

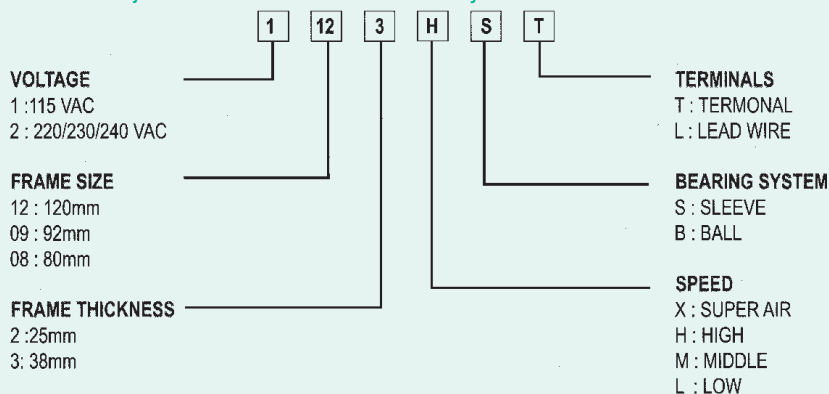

Porovnání magnetického systému SUNON s tradičními ventilátory

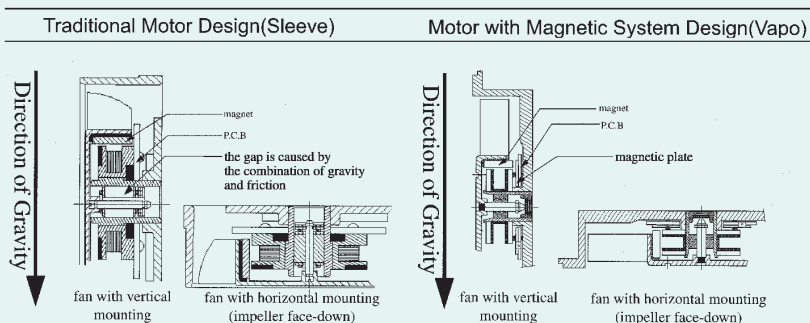

Filtry vzduchu pro ventilátory



FILTER 40	GES 071 000 81
Filtr vzduchu pro ventilátory 40x40mm, 30ppi	
FILTER 60	GES 071 000 67
Filtr vzduchu pro ventilátory 60x60mm	
FILTER 80	GES 071 000 69
Filtr vzduchu pro ventilátory 80x80mm	
FILTER 92	GES 071 000 70
Filtr vzduchu pro ventilátory 92x92mm	
FILTER 120	GES 071 000 73
Filtr vzduchu pro ventilátory 120x120mm	

Regulátory otáček ventilátorů

LFTR 125	GES 071 023 20
Spojitý regulátor otáček motoru ventilátoru 12VDC / 2,5W, SMD provedení	



LFTR 707M	GES 071 001 00
Spojitý regulátor otáček motoru ventilátoru 12VDC / 0,7-4,5W	

