# INNOLUX DISPLAY CORPORATION LCD MODULE SPECIFICATION

C	u	S	t	O	m	е	r	:	
_	•	•	•	•		•	-	-	

Model Name: AT050TN33

SPEC NO.: <u>A050-33-TT-01</u>

Date: 2008/11/25

Version: 01

- ☐ Preliminary Specification
- Final Specification

Remark	1
■Touch screen panel	10

#### For Customer's Acceptance

Appro	ved by	Comment
	C <sub>O</sub>	

Approved by	Reviewed by	Prepared by	
Rock Chi	Rock Chi James Yu Charlie Chou	David Lee	
2008/11/25	2008/11/25	2008/11/24	



InnoLux copyright 2004 All rights reserved, Copying forbidden.

## Record of Revision

Version	Revise Date	Page	Content
Pre-spec.01	2008/09/02		Initial Release.
.02	2008/09/09	6	Modify the note 1 of the typical operation conditions
		15	Modify the configuration of FPC in the chart
Final spec.01	2008/11/25	20	Modify the tolerance of the LCM thickness from ±0.3 to±0.2 The first version final specification
l mai opeo.o i	2000/11/20	6	Modify the note1 of the typical operation conditions
	4	9	Modify the timing diagram
		20	Modify the mechanical drawing



#### **Contents**

1. General Specifications	
2. Pin Assignment	2
2.1. TFT LCD Panel Driving Section	2
2.2. Touch Screen Panel Section	4
3. Operation Specifications	5
3.1. Absolute Maximum Ratings	5
3.2. Typical operation conditions	6
3.3 Backlight Driving Conditions	
3.4. Power Sequence	7
3.5. Timing Characteristics	8
3.5.1. Timing Conditions	8
3.5.2. Timing Diagram	9
4. Touch Screen Panel Specifications	10
4.1. Electrical Characteristics	10
4.2. Mechanical & Reliability Characteristics	
4.3. Linearity Definition	12
4.4. Housing design guide	13
5. Optical Specifications	14
6. Reliability Test Items	18
7. General Precautions	
7.1. Safety	19
7.2. Handling	19
7.3. Static Electricity	19
7.4. Storage	19
7.5. Cleaning	
8. Mechanical Drawing	20
9. Package Drawing	
9.1 Packaging Material Table	21
9.2 Packaging Quantity	21
9.3 Packaging Drawing	22

Page:1/22

# 1. General Specifications

No.	Item	Specification	Remark
1	LCD size	5.0 inch(Diagonal)	
2	Driver element	a-Si TFT active matrix	
3	Resolution	480 × RGB × 272	
4	Display mode	Normally White, Transmissive	
5	Dot pitch	0.077(W) × 0.231(H) mm	
6	Active area	110.88(W) × 62.832(H) mm	
7	Module size	120.70(W) × 75.80(H) × 4.25(D) mm	
8	Surface treatment	Anti-Glare	
9	Color arrangement	RGB-stripe	
10	Interface	Digital	
11	Backlight Power consumption	0.792 W(Typ.)	
12	Panel Power consumption	63 mW(Typ.)	
13	Weight	83g (Typ.)	



# 2. Pin Assignment

# 2.1.TFT LCD Panel Driving Section

FPC Connector is used for the module electronics interface. The recommended model

is FH19SC-40S-0.5SH manufactured by HIROSE.

Pin No.	Symbol	I/O	Function	Remark
1	$V_{LED}$	Р	Power for LED backlight cathode	
2	$V_{LED+}$	Р	Power for LED backlight anode	
3	GND	Р	Power ground	
4	$V_{DD}$	Р	Power voltage	2
5	R0	_	Red data (LSB)	9
6	R1	4	Red data	
7	R2	7	Red data	
8	R3	ź	Red data	
9	R4		Red data	
10	R5	Ι	Red data	
11	R6	_	Red data	
12	R7	_	Red data (MSB)	
13	G0	4	Green data (LSB)	
14	G1	I	Green data	
15	G2	I	Green data	
16	G3	I	Green data	
17	G4	I	Green data	
18	G5	I	Green data	
19	G6	I	Green data	



Page:3/22


				aye.3/22
20	G7	I	Green data (MSB)	
21	В0	I	Blue data (LSB)	
22	B1	l	Blue data	
23	B2	I	Blue data	
24	В3	I	Blue data	
25	B4	I	Blue data	
26	B5	I	Blue data	
27	В6	I	Blue data	
28	В7	I	Blue data (MSB)	
29	GND	Р	Power ground	
30	CLK	4	Pixel clock	
31	DISP		Display on/off	
32	NC	1)	No Connection	
33	NC		No Connection	
34	DE	<b>-</b>	Data Enable	
35	NC	-	No Connection	
36	GND	Р	Power ground	
37	X1	I/O	Right electrode – differential analog	
38	Y1	I/O	Bottom electrode – differential analog	
39	X2	I/O	Left electrode – differential analog	
40	Y2	I/O	Top electrode – differential analog	

I: input, O: output, P: Power

#### 2.2. Touch Screen Panel Section

Symbol	I/O	Function	Remark
X1	Right	Right electrode – differential analog	
Y1	Bottom	Bottom electrode – differential analog	
X2	Left	Left electrode – differential analog	>
Y2	Тор	Top electrode – differential analog	

Note: Touch Screen Panel Block

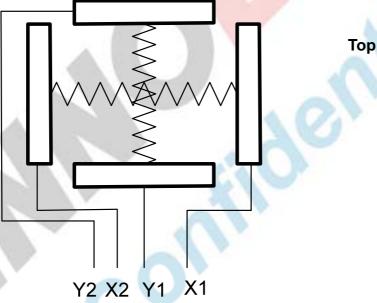

**Top View** 

Page:5/22

## INNOLUX

# 3. Operation Specifications

# 3.1. Absolute Maximum Ratings

(Note 1)


ltem	Symbol	Va	lues	Unit	Remark	
item	Symbol	Min.	Max.	Oilit	Kemark	
Power voltage	$V_{DD}$	-0.5	5.0	V		
Input signal voltage	Logic input	-0.5	5.0	V		
Operation temperature	T <sub>OP</sub>	-10	60	$^{\circ}\!\mathbb{C}$	Note 3, 4	
Storage temperature	T <sub>ST</sub>	-20	70	$^{\circ}\!\mathbb{C}$	Note 3, 4	
LED Reverse Voltage	VR		1.2	٧	Each LED Note 2	
LED Forward Current	lf		25	mA	Each LED	

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. A module should be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme condition, the module may be permanently destroved.

Note 2: VR Conditions: Zener Diode 20mA

Note 3: 90% RH Max.(Max wet temp. is 40°C)

Maximum wet-bulb temperature is at 38°C or less. And No condensation (no drops of dew)

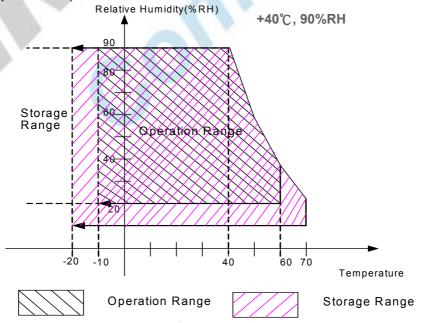

Note 4: In case of temperature below 0°C, the response time of liquid crystal (LC) becomes slower and the color of panel darker than normal one.





#### 3.2. Typical operation conditions

ltem	Symbol		Values		Unit	Remark
item	Symbol	Min.	Тур.	Max.	Onne	Keillaik
Power voltage	$V_{DD}$	3.0	3.3	3.6	V	
Current for Driver	I <sub>DD</sub>	-	19	25	mA	V <sub>DD</sub> = 3.3V
Input logic high voltage	V <sub>IH</sub>	0.8 V <sub>DD</sub>	[-]	$V_{DD}$	V	Note 1
Input logic low voltage	V <sub>IL</sub>	GND	1-1	0.2 V <sub>DD</sub>	V	Note 1

Note1: CLK, DE, R0~ R7, G0~ G7, B0~ B7.

# 3.3 Backlight Driving Conditions

Item	Symbol	Values			Unit	Remark	
item	Symbol	Min.	Тур.	Max.	Onit	Remark	
Voltage for LED Backlight	V <sub>L</sub>	18.6	19.8	21.0	V	Note 1	
Current for LED Backlight	IL 🕢	36	40	44	mA		
LED life time		20,000	-	-	Hr	Note 2	

Note 1: The LED Supply Voltage is defined by the number of LED at Ta=25  $^{\circ}$ C and I<sub>L</sub> =40mA.


Note 2: The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25°C and  $I_L$  =40mA. The LED lifetime could be decreased if operating  $I_L$  is lager than 40 mA.

Page:7/22

## 3.4. Power Sequence

INNOLUX

To prevent a latch-up or DC operation of the LCD module, the power on/off sequence should be as the diagram below.

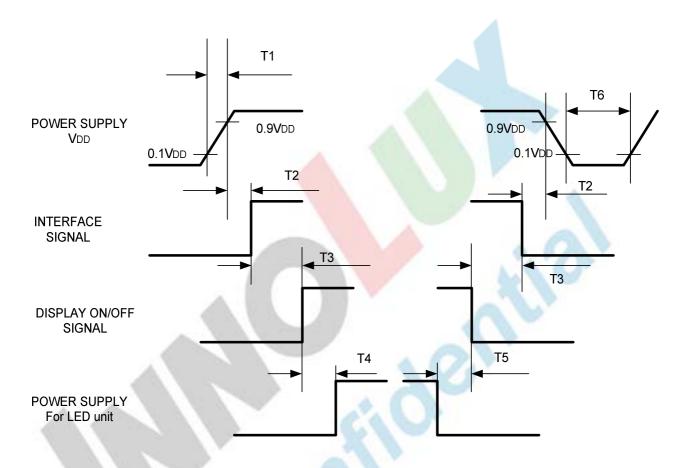

Symbol	Specification	Symbol	Specification
T1	0≦T1≦10 msec	T4	160 msec ≦T4
T2	0≦T2≦100 msec	T5	160 msec ≦T5
ТЗ	0≤T3≤200 msec	Т6	1 msec ≦T6

Page:8/22

# 3.5. Timing Characteristics


#### 3.5.1. Timing Conditions

Parallel DE mode RGB input timing table

Parameter	Symbol		Value		Unit
ratattietei	Symbol	Min.	Тур.	Max.	Oilit
CLK frequency	fclk	7	9	12	MHz
DEV period time	Tv	277	288	400	Н
DEV display area	Tvd		272		Н
DEV blanking	Tvb	5	16	128	Н
DEH period time	Th	520	525	800	CLK
DEH display area	Thd	1	480	110	CLK
DEH blanking	Thb	40	45	320	CLK
CLK cycle time	Tclk	83	110	200	ns
Clock width of high level	Tcwh	40	50	60	%
Clock width of low level	Tcwl	40	50	60	%
Clock rising time	trck	10	-	9	ns
Clock falling time	<b>t</b> fck		-	9	ns
Data Setup Time	tdesu	10	-	-	ns
Data Hold Time	tdahd	10	-	-	ns
DE Setup Time	<b>t</b> desu	10	-	-	ns
DE Hold Time	<b>t</b> dehd	10	-	-	ns



#### 3.5.2. **Timing Diagram**

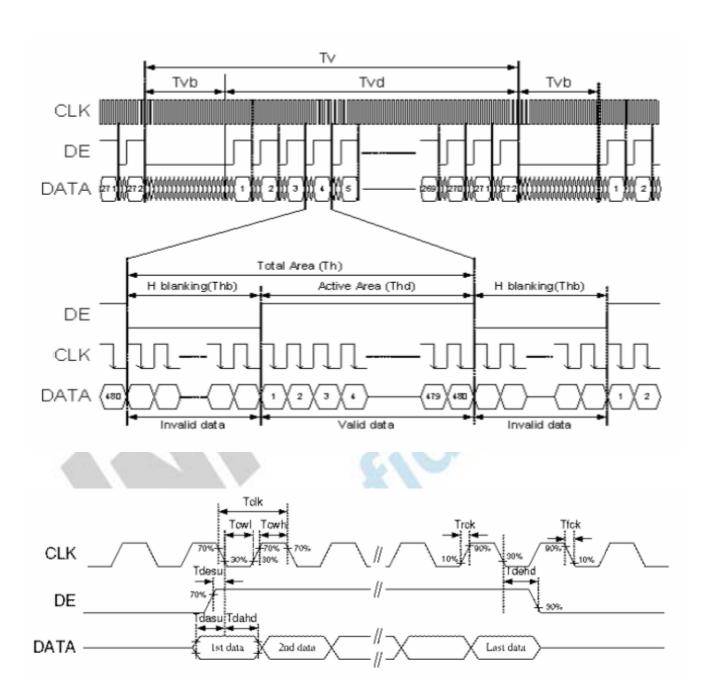

INNOLUX

SPEC NO: A050-33-TT-01 Date :2008/11/25 Page:10/22

# 4. Touch Screen Panel Specifications

#### 4.1. Electrical Characteristics

Item	Value			Unit	Remark	
iteiii	Min.	Тур.	Max.	Oilit	Remark	
Terminal	100	-	900	Ω	X(Film side)	
Resistance	100	-	900	Ω	Y(Glass side)	
Insulation resistance	25	- /	-	МΩ	DC 25V	
Voltage	-	5	7	V	DC	
Chattering	-		10	ms	100kΩ pull-up	
Transparency	80			%	JIS K7105	

Note: Avoid operating with hard or sharp material such as a ball point pen or a mechanical pencil except a polyacetal pen (tip R0.8mm or less) or a finger.


Page:11/22

#### 4.2. Mechanical & Reliability Characteristics

Item		Value			Remark	
item	Min.	Тур.	Max.	Unit	Remark	
Activation force	80	-	-	gf	Note 1	
Durability-surface scratching	Write 100,000	-	-	characters	Note 2	
Durability-surface pitting	1,000,000	-	-	touches	Note 3	
Surface hardness	3	- 7	-	Н	JIS K5400	

Note 1: Activation force test condition

- (1) Input DC 5V on X direction, Drop off Polyacetal Stylus (R0.8), until output voltage stabilize ,then get the activation force •
- (2) R8.0mm Silicon rubber for finger Activation force test
- (3) Test point: 9 points

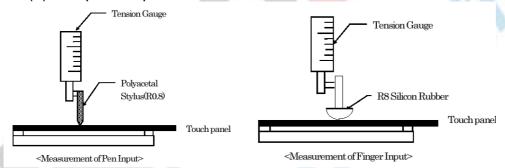

Note 2: Measurement for surface area.

- -Scratch 100,000 times straight line on the film with a stylus change every 20,000 times.
- -Force: 250gf.
- -Speed: 60mm/sec.
- -Stylus: R0.8 polyacetal tip.


Note 3: Pit 1,000,000 times on the film with a R0.8 silicon rubber.

- -Force: 250gf.
- -Speed: 2times/sec.

Page:12/22


# 4.3. Linearity Definition

**INNOLUX** 

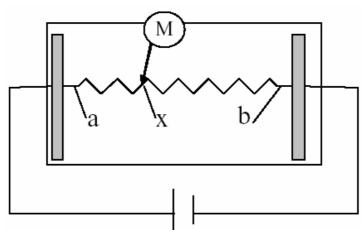

Va: maximum voltage in the active area of touch panel Vb: minimum voltage in the active area of touch panel


X: random measuring point Vxm: actual voltage of Lx point Vxi: theoretical voltage of Lx point

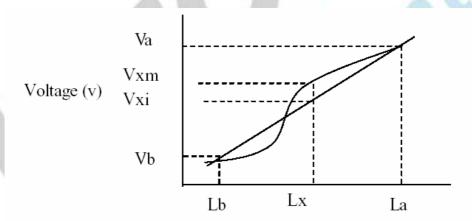

Distance(mm)

Linearity = [|Vxi-Vxm |/(Va-Vb)]\*100%

Note: Test area is as follows and operation force is 150gf.

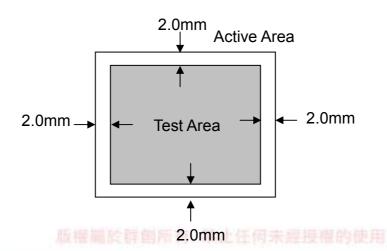


The copyright belongs to InnoLux. Any unauthorized use is prohibited.

Date :2008/11/25 Page:13/22


#### 4.4. Housing design guide

Housing design follow as below

- 1) Avoid the design that housing overlap and press on the active area of the LCM
- 2) Give enough gap(over 0.5mm at compressed) between the housing and TSP to protect wrong operating.

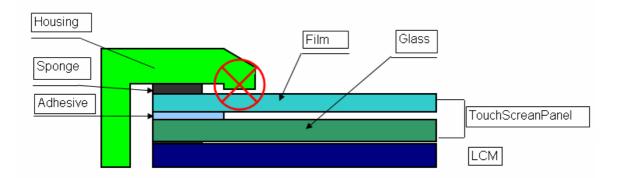

- 3) Use a buffer material(Gasket) between the TSP and housing to protect damage and wrong operating
- 4) Avoid the design that buffer material overlap and press on the inside of TSP view area

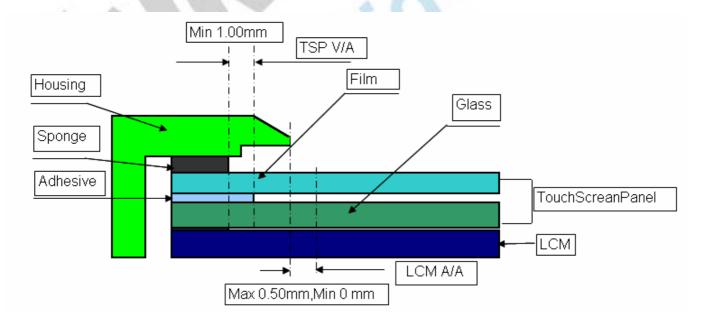

Page:14/22

# 5. Optical Specifications

ltem	Symbol	Condition	Values			Unit	Remark	
item	nem Symbol So		Min.	Тур.	Max.	Offic	Komark	
	$\theta_{L}$	Ф=180°(9 o'clock)	60	70	-			
Viewing angle	$\theta_{R}$	Ф=0°(3 o'clock)	60	70	1	ADATAD	Note 1 Note 7	
(CR≥ 10)	0)	Φ=90°(12 o'clock)	40	50	<i>p</i> -			
	$\theta_{B}$	Φ=270°(6 o'clock)	60	70	_			
Posnonso timo	T <sub>ON</sub>			10	20	msec	Note 3	
Response time	T <sub>OFF</sub>		-	15	30	msec	Note 3	
Contrast ratio	CR		400	500	P.	-	Note 4	
Oalan alana maatiaita	W <sub>X</sub>	Normal θ=Φ=0°	0.26	0.31	0.36	-	Note 2 Note 5	
Color chromaticity	W <sub>Y</sub>		0.28	0.33	0.38	-	Note 6 Note 7	
Luminance	L	C.	240	300	-	cd/m²	Note 6	
Luminance uniformity	Y <sub>U</sub>		70	75	-	%	Note 8	


Test Conditions:

- 1. V<sub>DD</sub> =3.3V, I<sub>L</sub>=40mA (Backlight current), the ambient temperature is 25°C.
- 2. The test systems refer to Note 2.

Page:15/22



Note 1: Definition of viewing angle range

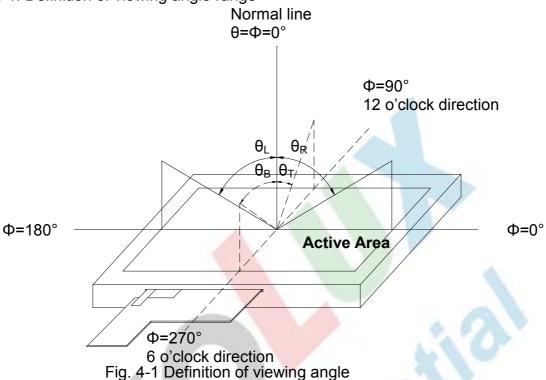

Note 2: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 30 minutes operation, the optical properties are measured at the center point of the LCD screen. (Response time is measured by Photo detector TOPCON BM-7, other items are measured by BM-5A/Field of view: 1° /Height: 500mm.)

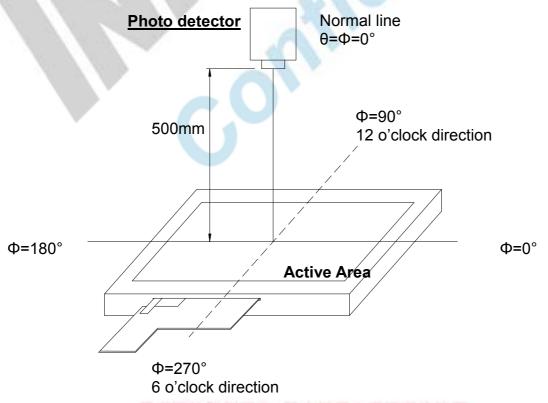


Fig. 4-2 Optical measurement system setup

The copyright belongs to InnoLux. Any unauthorized use is prohibited.

Page:16/22

#### Note 3: Definition of Response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time  $(T_{ON})$  is the time between photo detector output intensity changed from 90% to 10%. And fall time  $(T_{OFF})$  is the time between photo detector output intensity changed from 10% to 90%.

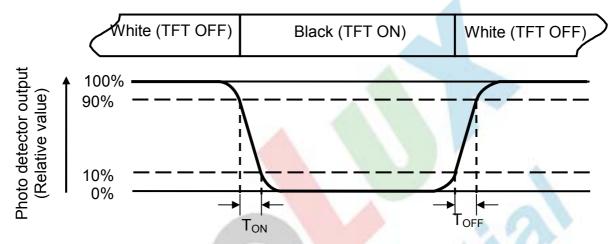


Fig. 4-3 Definition of response time

#### Note 4: Definition of contrast ratio

Contrast ratio (CR) =  $\frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$ 

Note 5: Definition of color chromaticity (CIE1931)

Color coordinates measured at center point of LCD.

Note 6: All input terminals LCD panel must be ground while measuring the center area of the panel. The LED driving condition is I<sub>L</sub>=40mA.

Note 7: The values shall be measured without Touch Screen Panel.

Page:17/22

#### Note 8: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (Refer to Fig. 4-4 ). Every measuring point is placed at the center of each measuring area.

Luminance Uniformity (Yu) = 
$$\frac{B_{min}}{B_{max}}$$

L-----Active area length W----- Active area width

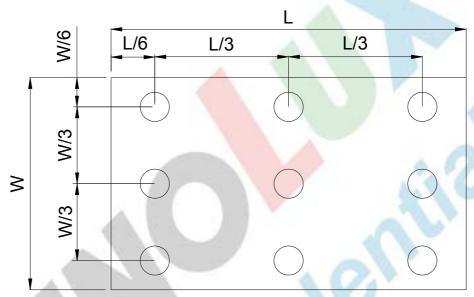


Fig. 4-4 Definition of measuring points

 $\mathbf{B}_{\text{max}}$ : The measured maximum luminance of all measurement position.  $\mathbf{B}_{\text{min}}$ : The measured minimum luminance of all measurement position.

Page:18/22

# 6. Reliability Test Items

(Note3)

Item	Test Conditions	Remark
High Temperature Storage	Ta = 80°C 240 hrs	Note 1,Note 4
Low Temperature Storage	Ta = -30°C 240hrs	Note 1,Note 4
High Temperature Operation	Ts = 70°C 240hrs	Note 2,Note 4
Low Temperature Operation	Ta = -20°C 240hrs	Note 1,Note 4
Operate at High Temperature and Humidity	+40°C, 90% RH 240 hrs	Note 5
Thermal Shock	-30°C/30 min ~ +80°C/30 min for a total 100 cycles, Start with cold temperature and end with high temperature	Note 4
Vibration Test	Frequency range:10~55Hz Stroke:1.5mm Sweep:10Hz~55Hz~10Hz 2 hours for each direction of X. Y. Z. (6 hours for total)	
Mechanical Shock	100G 6ms,±X, ±Y, ±Z 3 times for each direction	
Package Vibration Test	Random Vibration: 0.015G*G/Hz from 5-200HZ, -6dB/Octave from 200-500HZ 2 hours for each direction of X. Y. Z. (6 hours for total)	
Package Drop Test	Height:60 cm 1 corner, 3 edges, 6 surfaces	
Electro Static Discharge	± 2KV, Human Body Mode, 100pF/1500Ω	

- Note 1: Ta is the ambient temperature of samples.
- Note 2: Ts is the temperature of panel's surface.
- Note 3: In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but doesn't guarantee all the cosmetic specification.
- Note 4: Before cosmetic and function tests, the product must have enough recovery time, at least 2 hours at room temperature.
- Note 5: Before cosmetic and function tests, the product must have enough recovery time, at least 24 hours at room temperature.



Page:19/22

#### 7. General Precautions

#### 7.1. Safety

Liquid crystal is poisonous. Do not put it in your mouth. If liquid crystal touches your skin or clothes, wash it off immediately by using soap and water.

## 7.2. Handling

- 1. The LCD panel is plate glass. Do not subject the panel to mechanical shock or to excessive force on its surface.
- 2. The polarizer attached to the display is easily damaged. Please handle it carefully to avoid scratch or other damages.
- 3. To avoid contamination on the display surface, do not touch the module surface with bare hands.
  - 4. Keep a space so that the LCD panels do not touch other components.
- 5. Put cover board such as acrylic board on the surface of LCD panel to protect panel from damages.
- 6. Transparent electrodes may be disconnected if you use the LCD panel under environmental conditions where the condensation of dew occurs.
  - 7. Do not leave module in direct sunlight to avoid malfunction of the ICs.

#### 7.3. Static Electricity

- 1. Be sure to ground module before turning on power or operating module.
- 2. Do not apply voltage which exceeds the absolute maximum rating value.

## 7.4. Storage

- 1. Store the module in a dark room where must keep at 25±10℃ and 65%RH or less.
- 2. Do not store the module in surroundings containing organic solvent or corrosive gas.
  - 3. Store the module in an anti-electrostatic container or bag.


#### 7.5. Cleaning

- 1. Do not wipe the polarizer with dry cloth. It might cause scratch.
- 2. Only use a soft sloth with IPA to wipe the polarizer, other chemicals might permanent damage to the polarizer.

Date: 2008/11/25 Page:20/22

# 8. Mechanical Drawing

INNOLUX

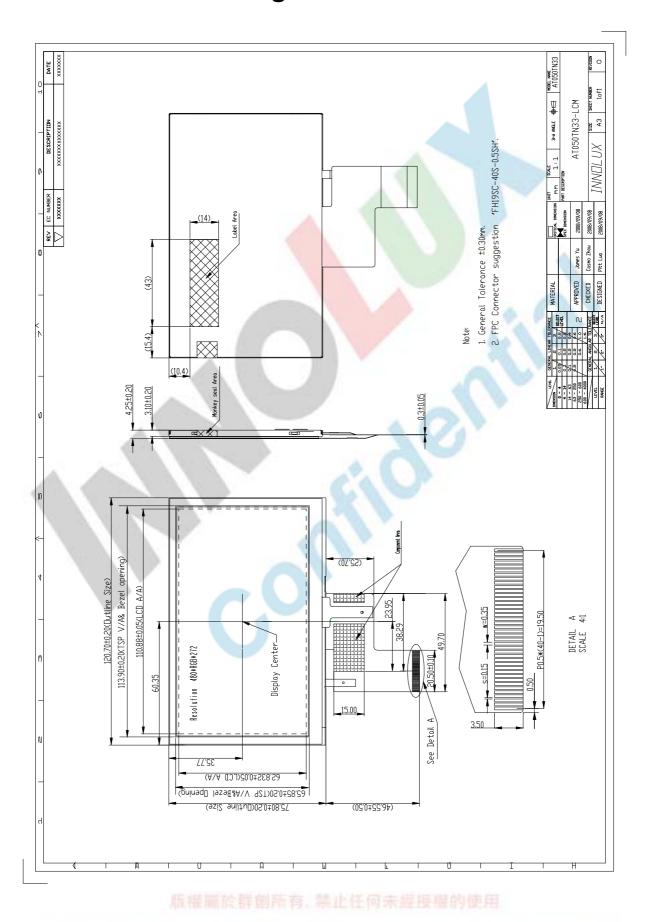

Page:21/22

# 9. Package Drawing

# 9.1 Packaging Material Table

No	Item	Model (Material)	Dimensions(mm)	Unit Weight (Kg)	Quantity (pcs)	Remark	
1	LCM module	AT050TN33	120.7×75.8×4.25	0.083	100		
2	Corrugated Bar	B Corrugated Paper	510 × 178	0.047	4		
3	Corrugated Board	B Corrugated Paper	512 × 349	0.074	3		
4	Partition	BC Corrugated Paper	512 × 349 × 112	0.073	2		
5	Dust-Proof Bag	PE	700 × 530	0.060	1		
6	A/S Bag	PE	145 ×145	0.001	100		
7	Carton	Corrugated Paper	530 × 355 × 255	1.100	1		
8	Total weight	10.116 ± 5% Kg					

# 9.2 Packaging Quantity

(1) LCM quantity per Partition: 2 row x 25 pcs = 50pcs

(2) Total LCM quantity in Carton: 2 layer x 50 pcs/Partition = 100 pcs



Page:22/22

# 9.3 Packaging Drawing

