


1. Recommended Parts List


- Note: 1. The components identified by “” mark are critical for X-ray safety. Replace these with only the same parts specified.
2. The components identified by “*” mark are critical parts.
3. There is only OTP IC at the model beginning (FPR stage or before). When it put in mass production and there must be Mask coming out. Please check you have spare parts need, please check BOM to get the last release part number and related information.

No.	Location	Part Number	Description
1	V002	6711300030	HARNESS 30P 200mm 20276#28-3
 2 *	V170	6814002100	LCD L170E3 ACER (B17AAU)
 3 *	V170	6814002600	LCD HT17E11-100 REV=0 HYDIS (B17AAY)
4	D321	6412001778	DIODE MM4148 SMD GOODARK
5	I301	6444006108	IC MOS M51953AFP 8P SOP
6 *	I302	6448015548	IC CPU PROM P87C51RD+IA 44P PL
7	I305	6448016508	IC 24LC16B/SN 8P SOP
8	I312	6448018208	IC 24LC02B 8PIN SOP MICROCHIP
9 *	I315	6444007608	IC CMOS gm5020 292P BGA GENESI
10	I319	6444007708	IC CPU SN75LVDS83 56PIN DGG TI
11	I321	6442027308	IC Linear Si4431DY 8P SOP
12	I323	6442023326	IC Linear AIC1084 33CM 3P TO26
13	I324	6442028308	IC Linear Si3025LS 8P SOP SANK
14	L302	6855003500	EMI FILTER EF 1T2012 050T C&C
15	X301	6449002650	CRYSTAL 24MHz AT 49 50pp
16	0000	5114600001	CONTROL BD U170ATUAV(99)
17	D600	6418004401	LED LTL 36EDJP 1(Y)3(G) LITEON
 18 *	INVA	6716009600	INVERTER DC-AC 12V AMBIT (B17AAU)
 19 *	INVA	6716010000	INVERTER DC-AC 12V AMBIT T151005 (B17AAY)
20	I332	6442023100	IC-LINEAR TDA7496L 20P
21	L332	6111456131	COIL CHOKE 45uH DRWW10x10L
22	00000	5113800003	CONTROL BD for Mercury
23	00000	5113800013	CONTROL BD for Super Mercury
24	00000	5113800002	CONTROL BD for Eureka


ITEM	PART NO.	DESCRIPTION	QTY
1	717230001-04	F/C ASSTY	1
2	714012010	SCREW	2
3	714012010	CONTROL B9	1
4	714012010	SCREW	4
5	714012010	1" PANEL	1
6	714012010	PROJECT PANEL	1
7	714012010	PROJECT B9	1
8	714012010	PROJECT B9	1
9	714012010	PROJECT B9	1
10	714012010	PROJECT B9	1
11	714012010	PROJECT B9	1
12	714012010	PROJECT B9	1
13	714012010	PROJECT B9	1
14	714012010	PROJECT B9	1
15	714012010	PROJECT B9	1
16	714012010	PROJECT B9	1
17	714012010	PROJECT B9	1
18	714012010	PROJECT B9	1
19	714012010	PROJECT B9	1
20	714012010	PROJECT B9	1
21	714012010	PROJECT B9	1
22	714012010	PROJECT B9	1
23	714012010	PROJECT B9	1
24	714012010	PROJECT B9	1
25	714012010	PROJECT B9	1
26	714012010	PROJECT B9	1
27	714012010	PROJECT B9	1
28	714012010	PROJECT B9	1
29	714012010	PROJECT B9	1
30	714012010	PROJECT B9	1
31	714012010	PROJECT B9	1
32	714012010	PROJECT B9	1
33	714012010	PROJECT B9	1
34	714012010	PROJECT B9	1
35	714012010	PROJECT B9	1

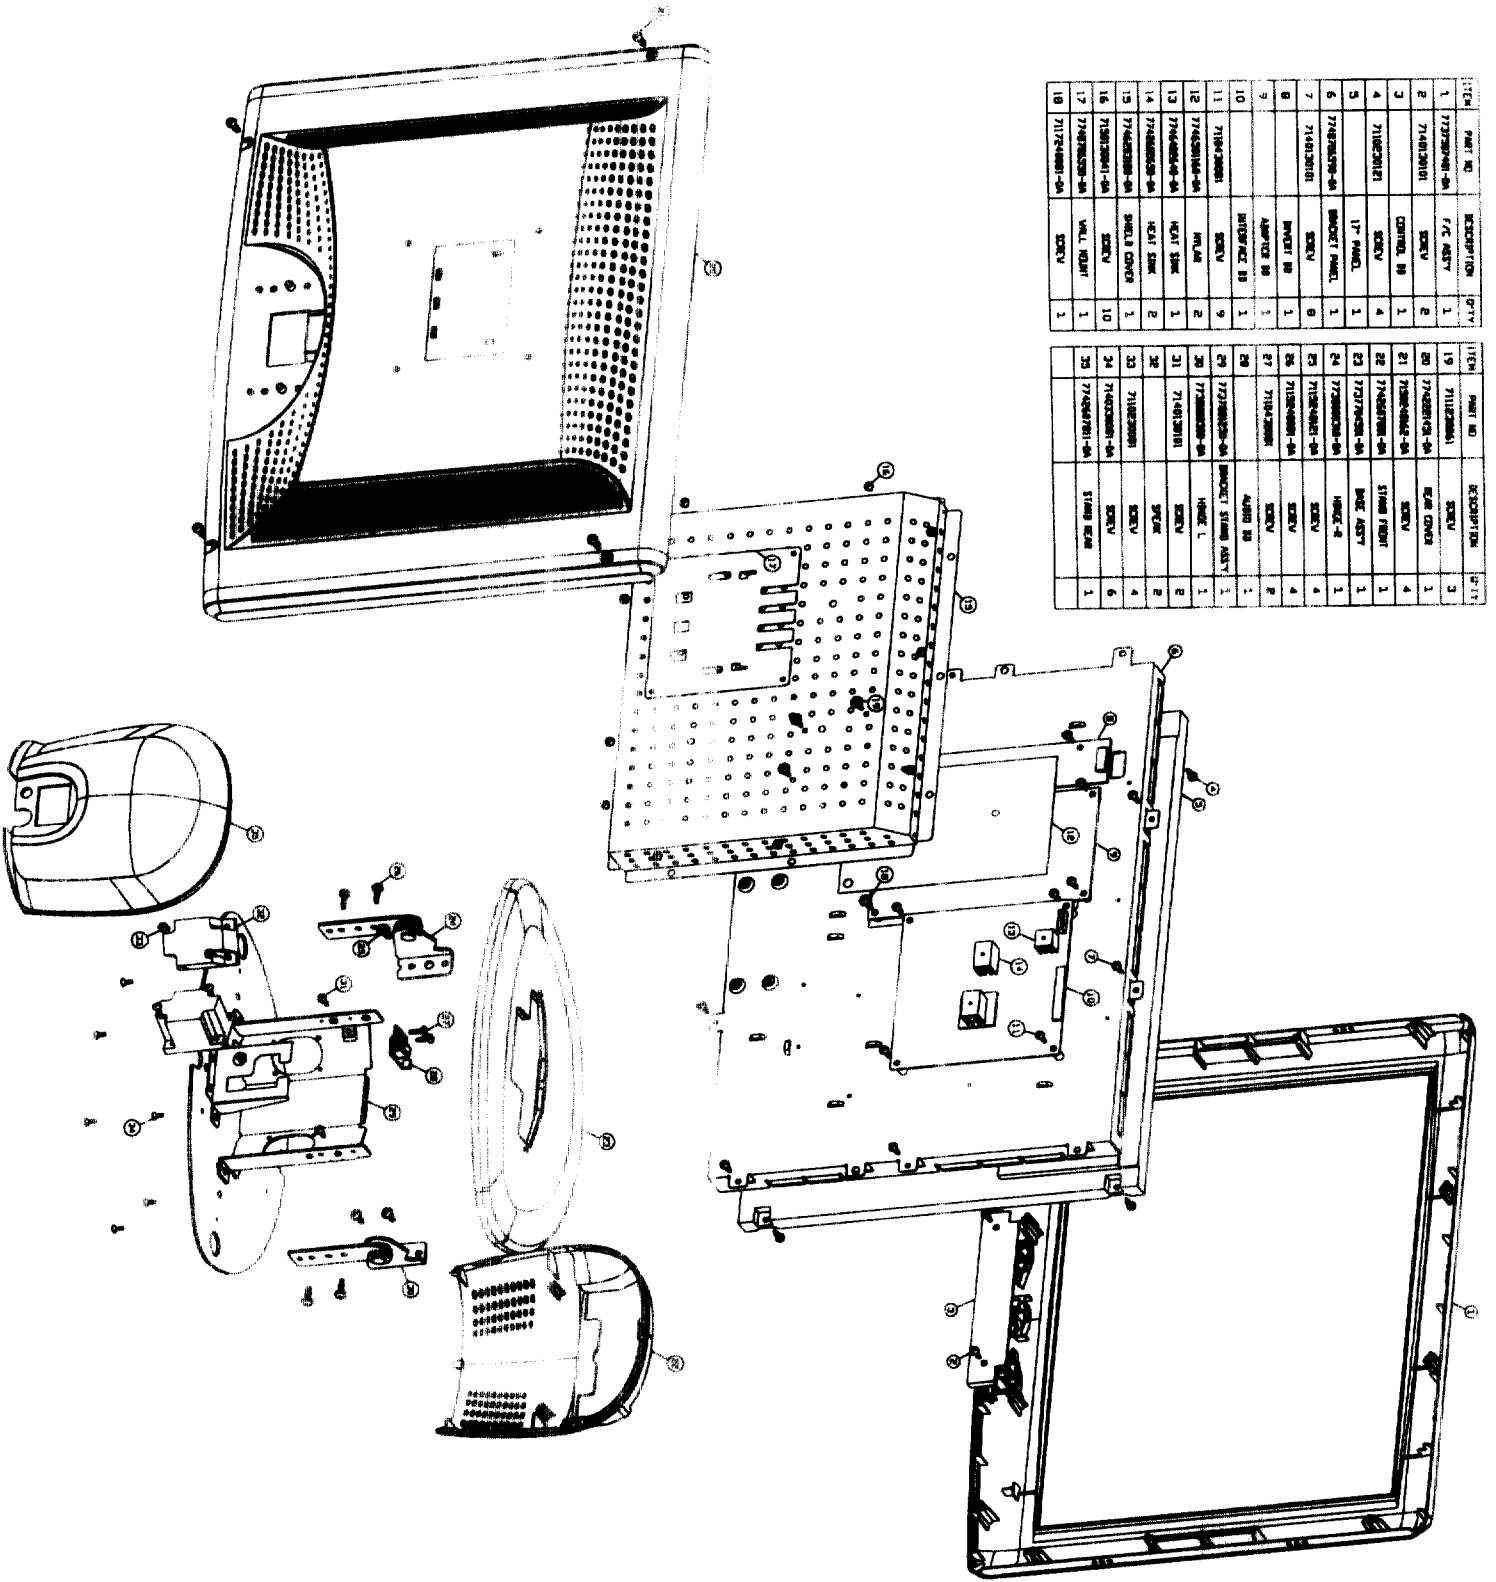





REVISION HISTORY













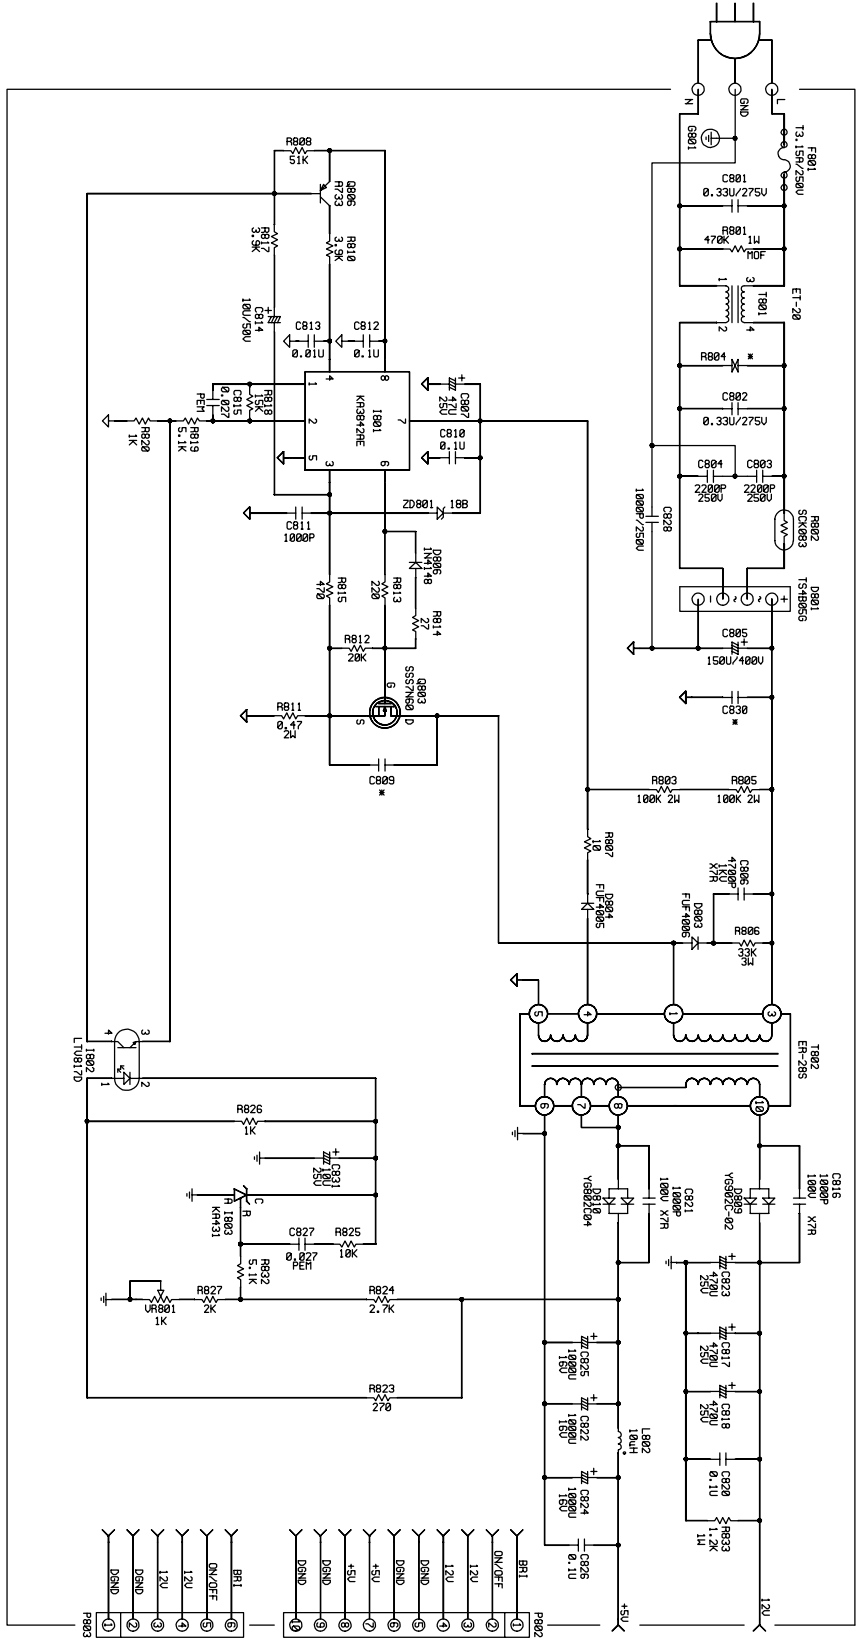



DRAWN :	K. I HUANG	DATE :	10/31/01
CHECK :		DATE :	
APPRO :		DATE :	
DESIGN :		DATE :	
CHECK :		DATE :	
APPRO :		DATE :	
TITLE : LITE-ON TECHNOLOGY CO.			
PCB. NO : 8812290000-01			
SCH. REV. :			
SHEET : 01			

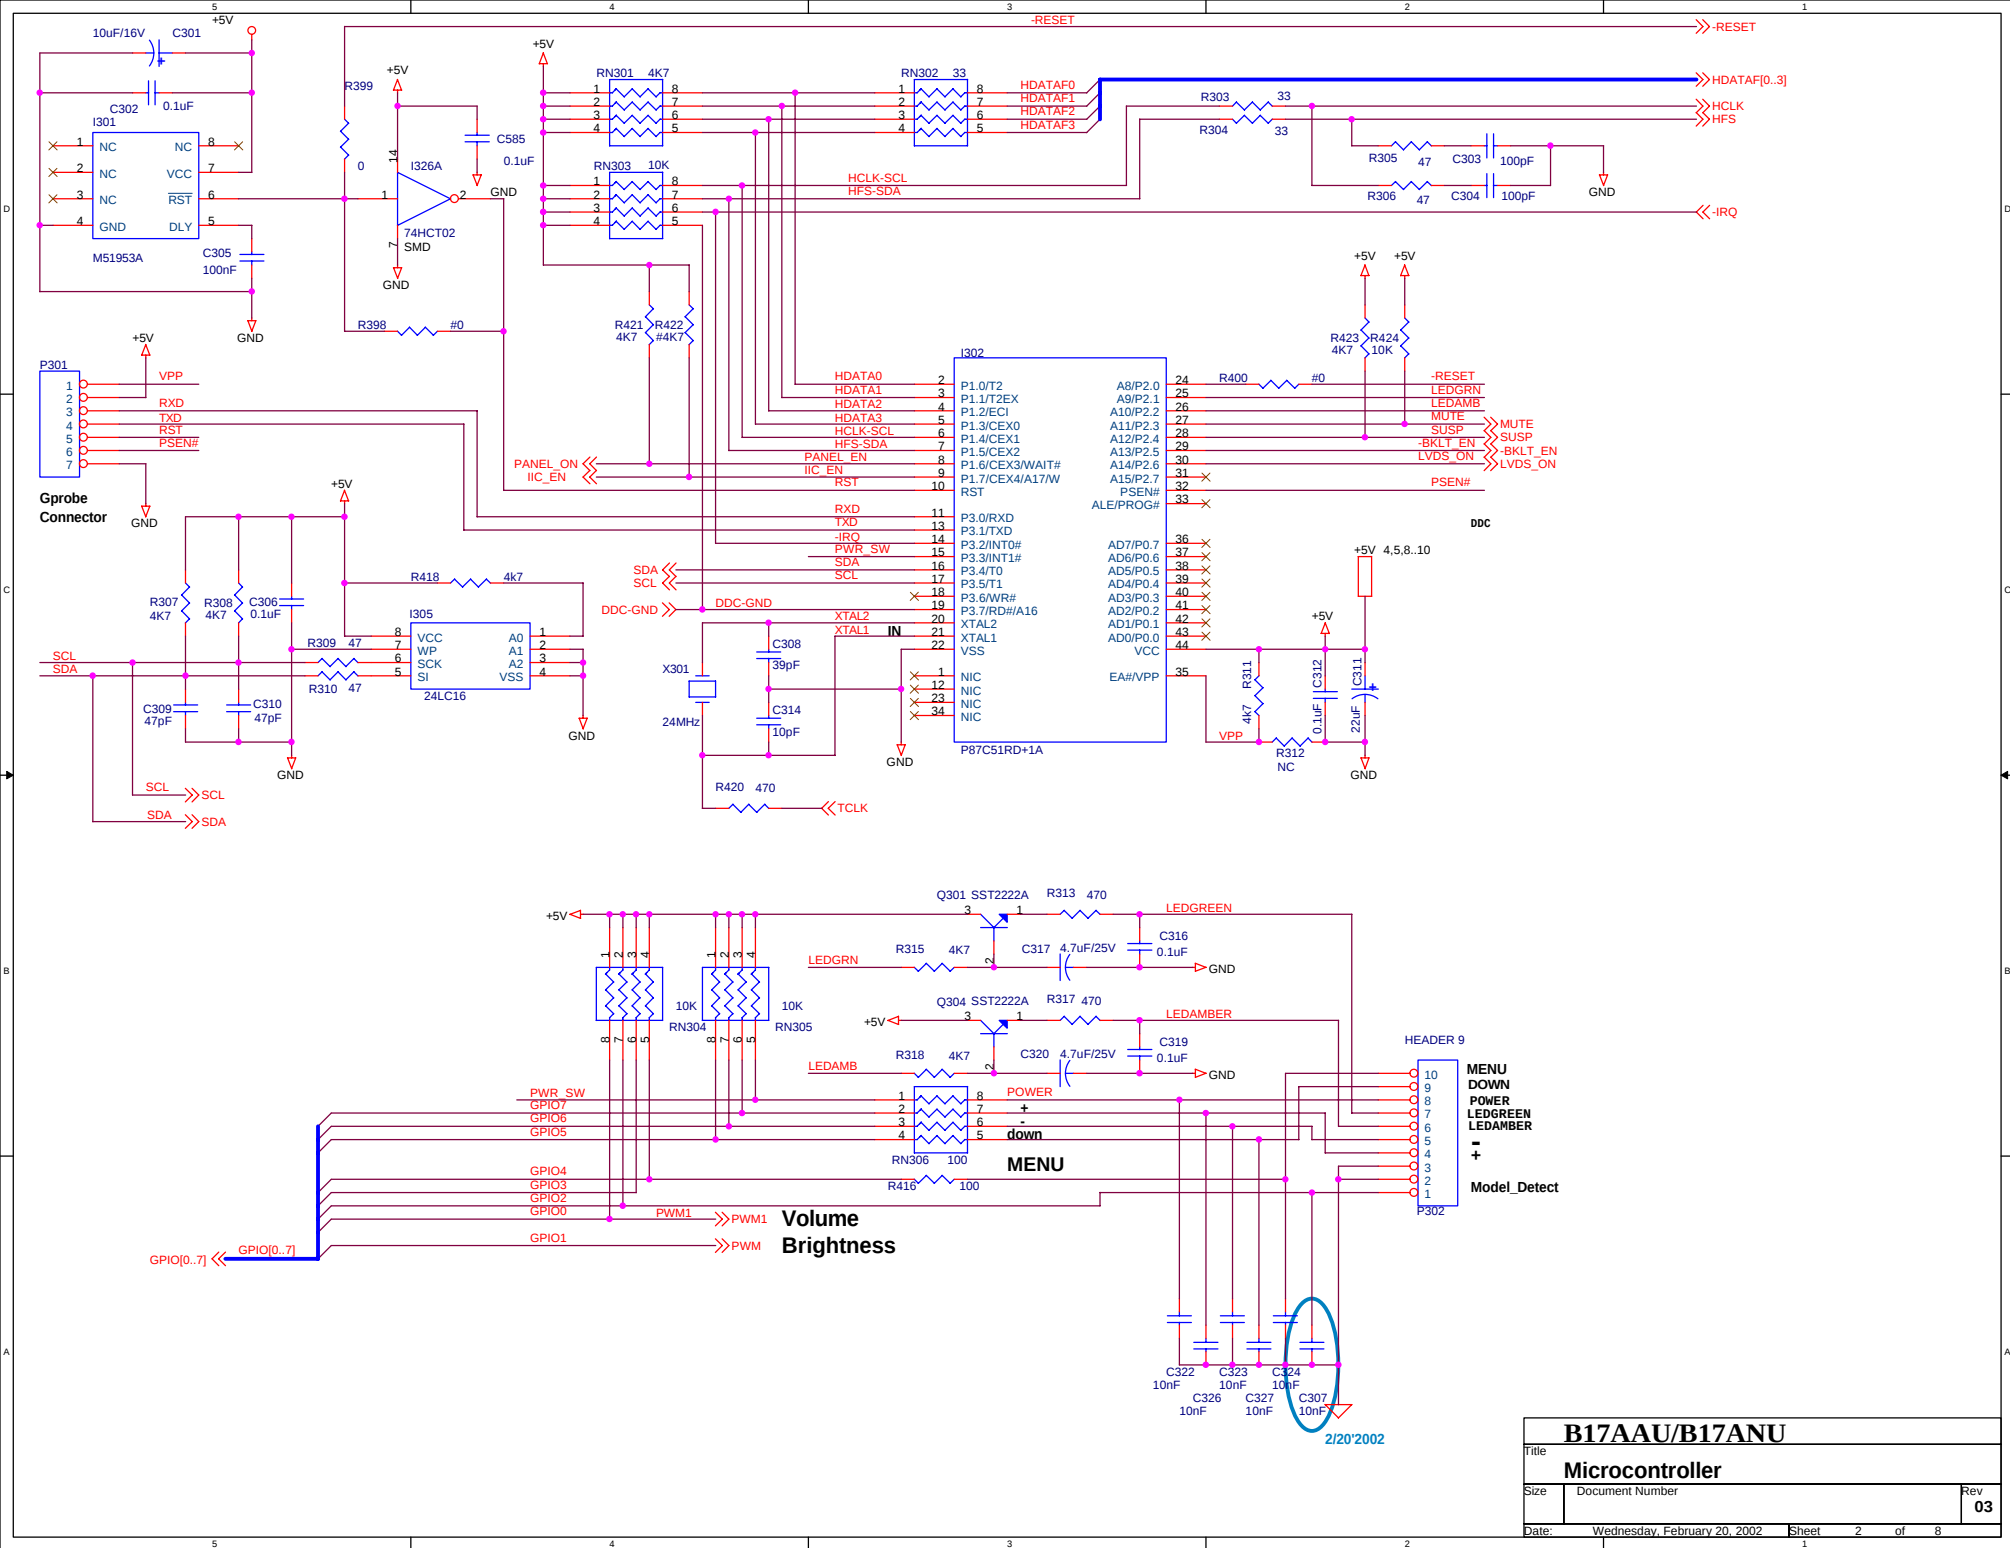


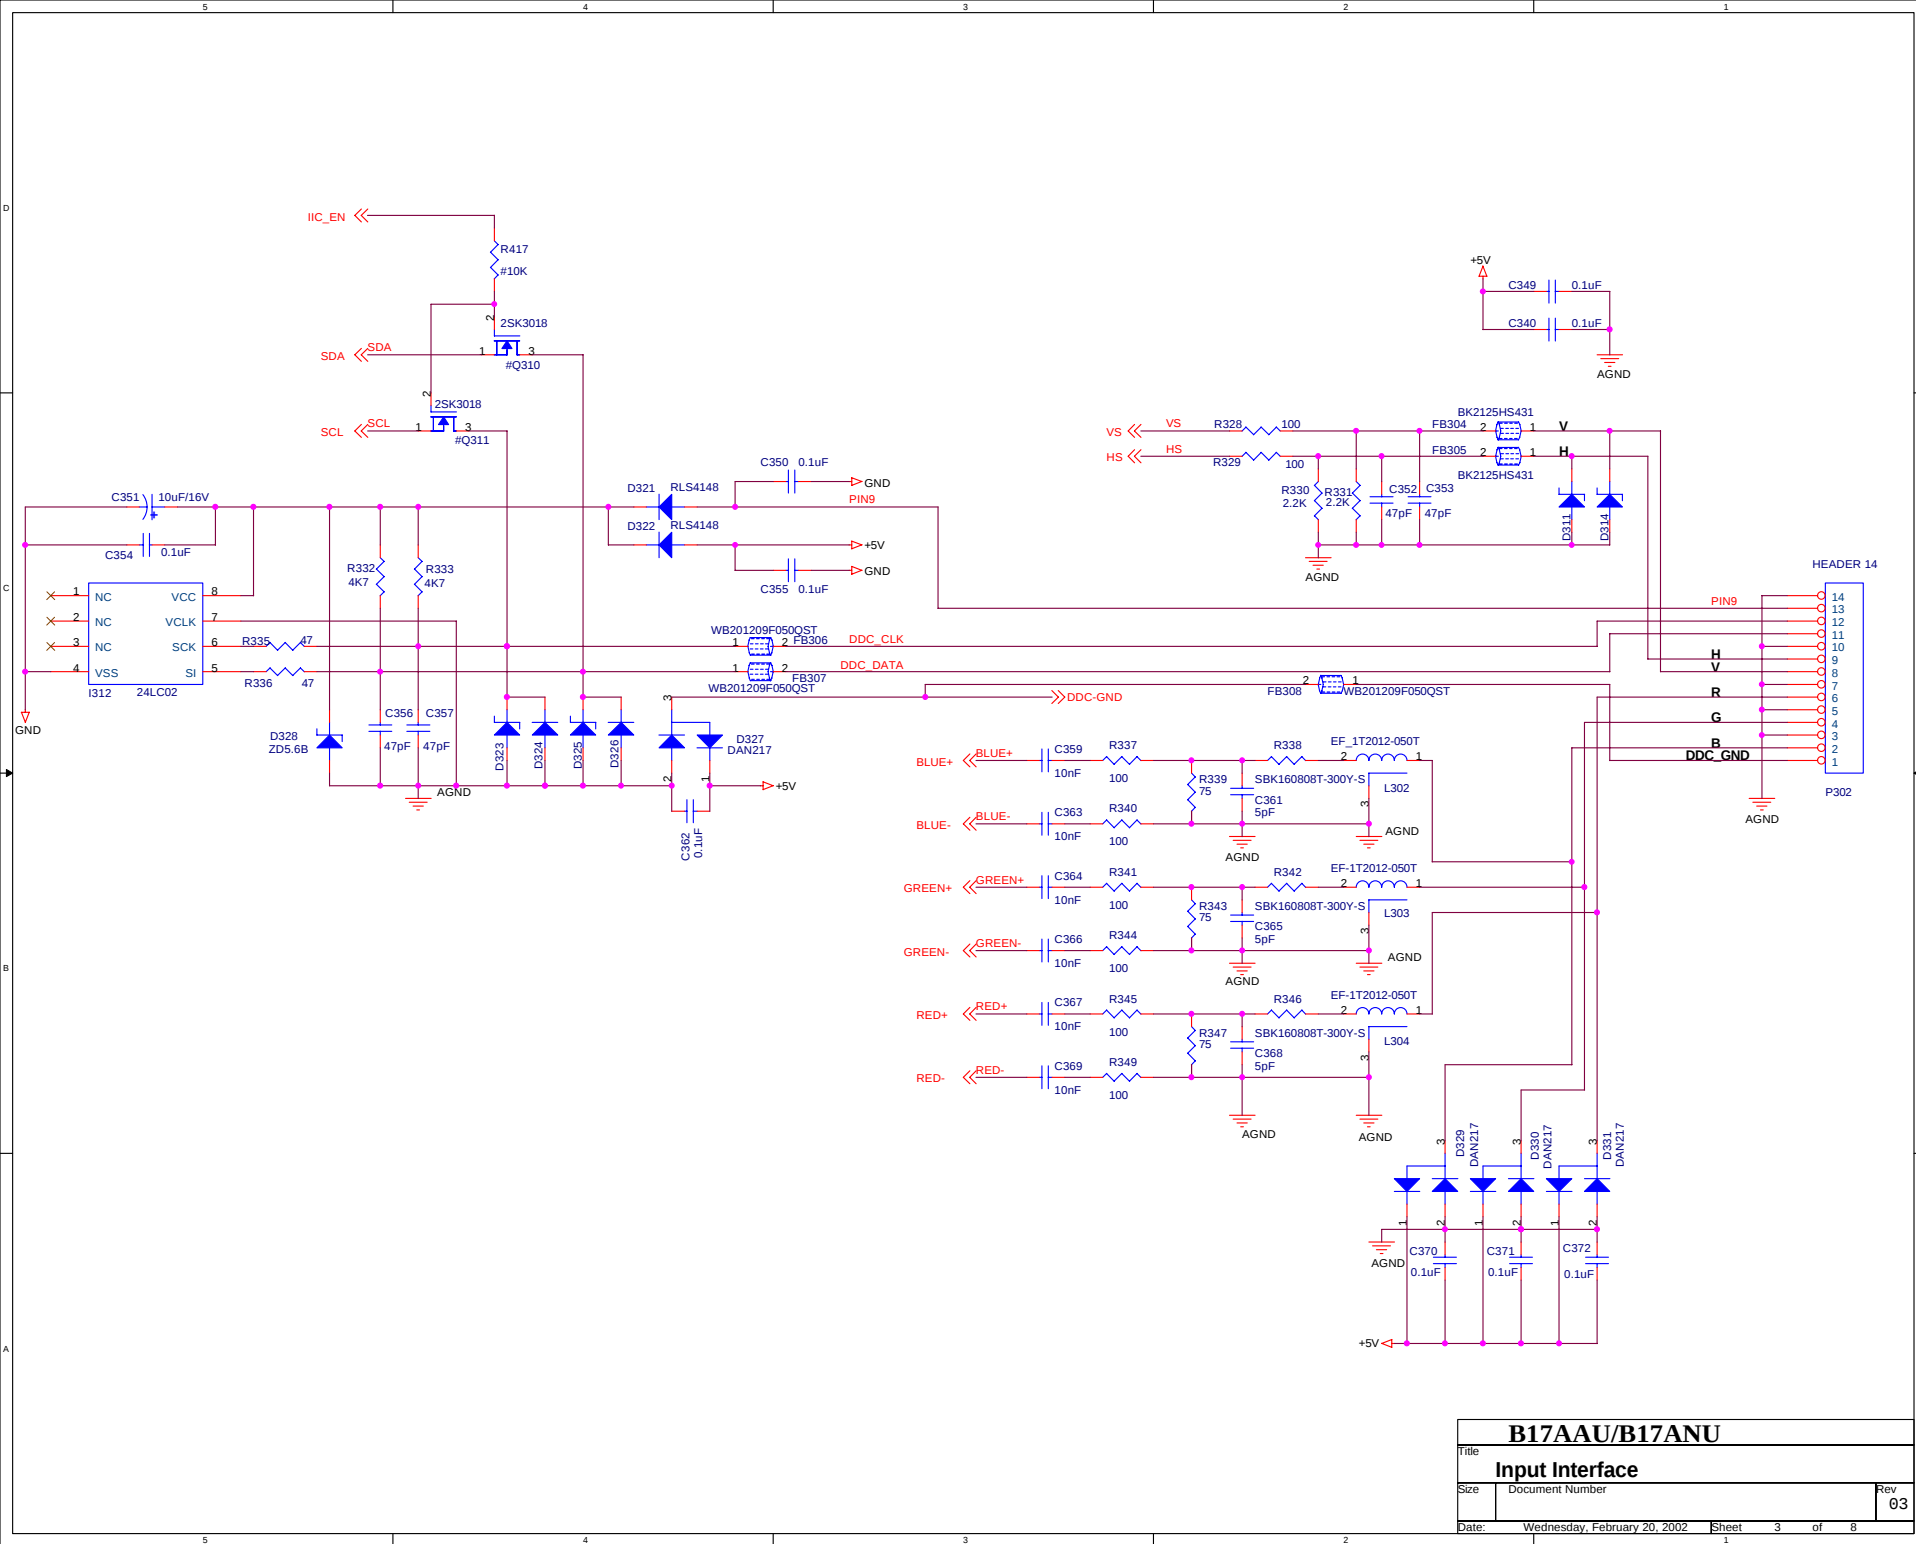


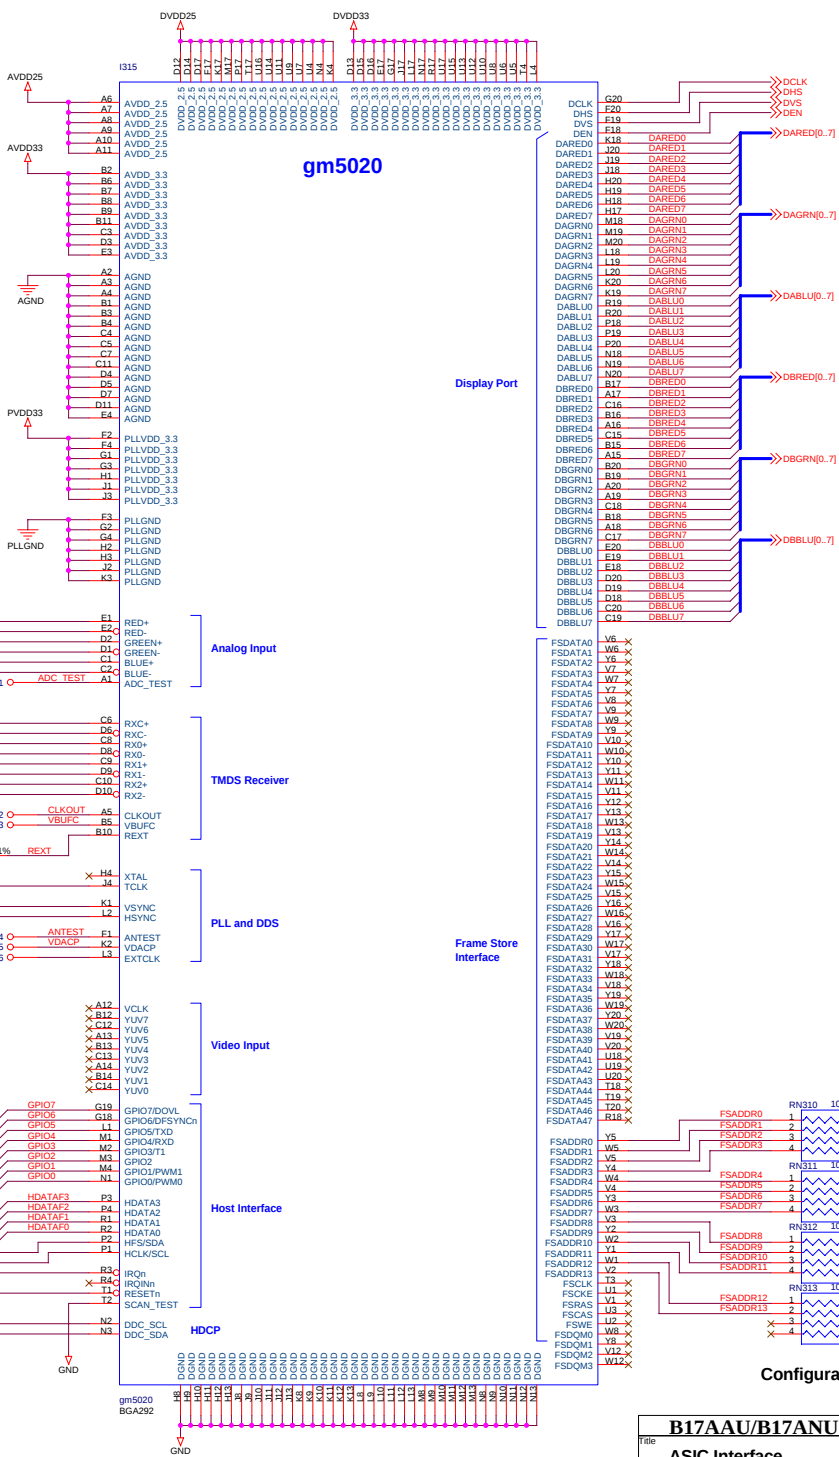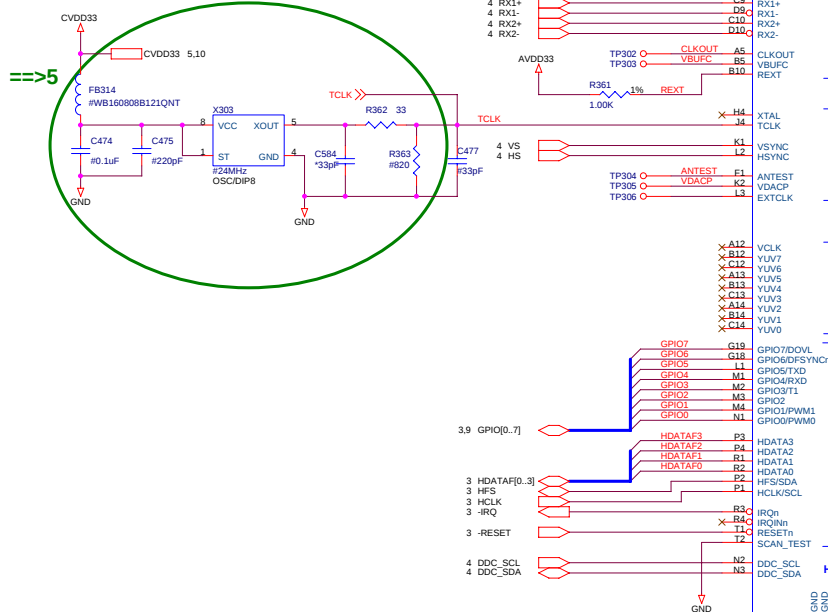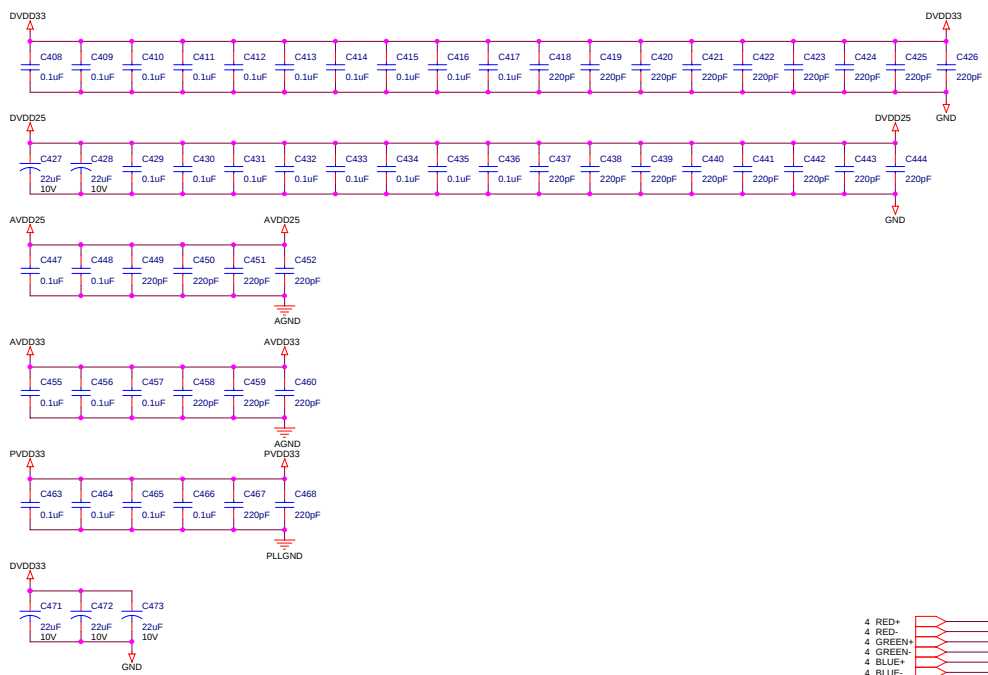

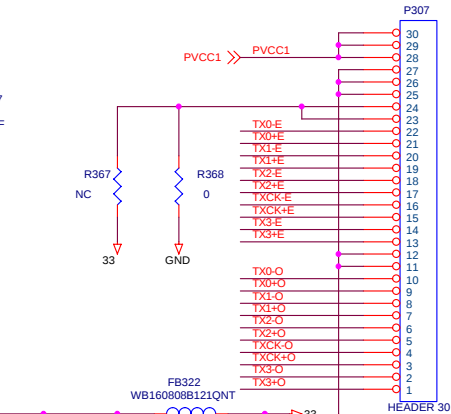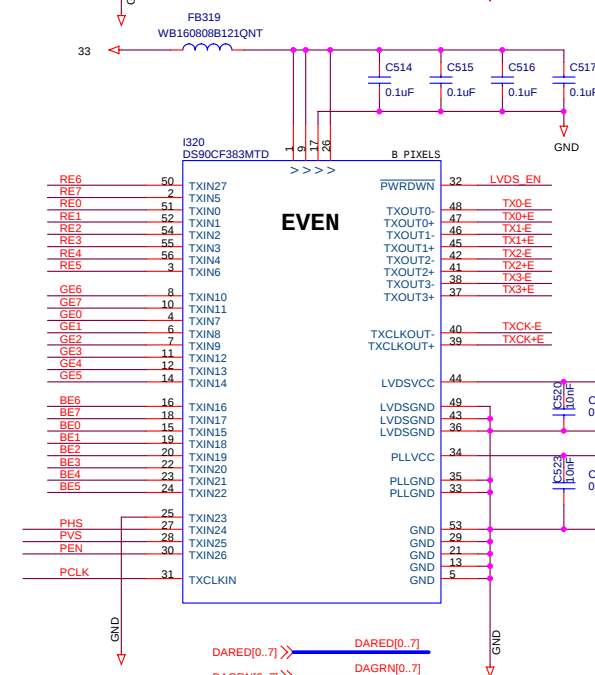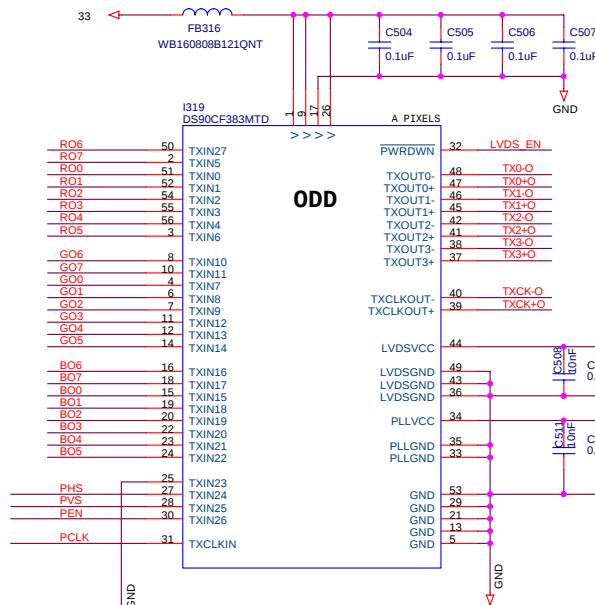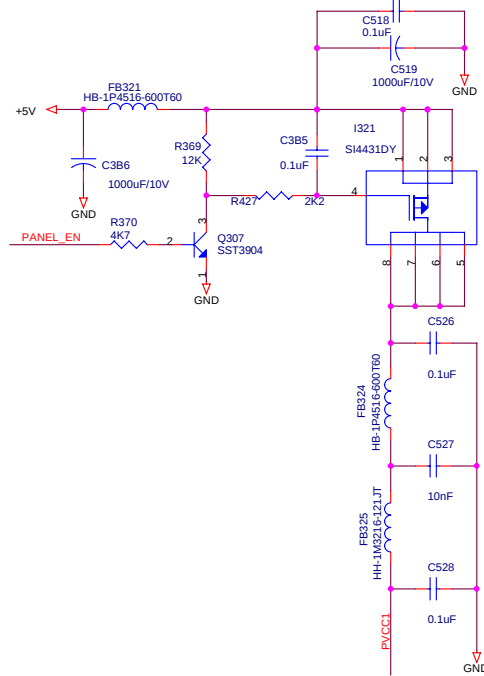

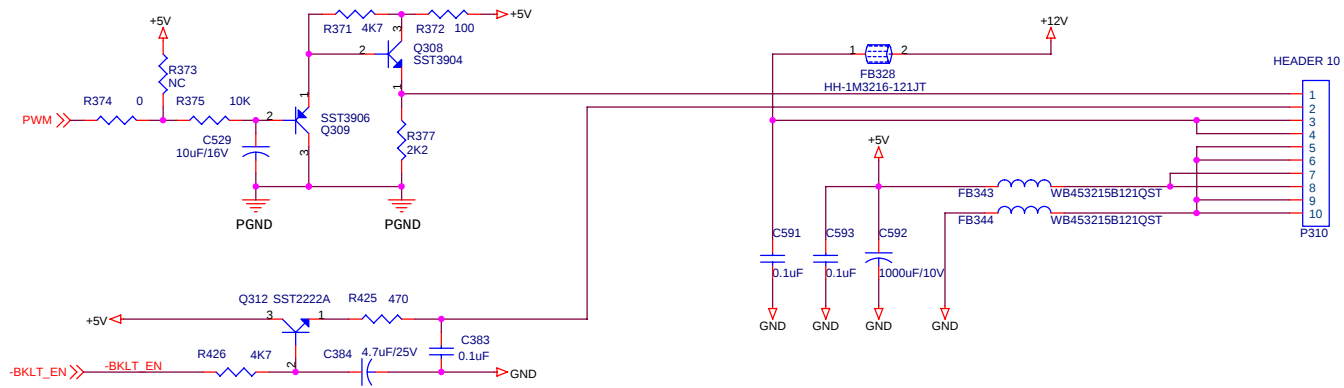

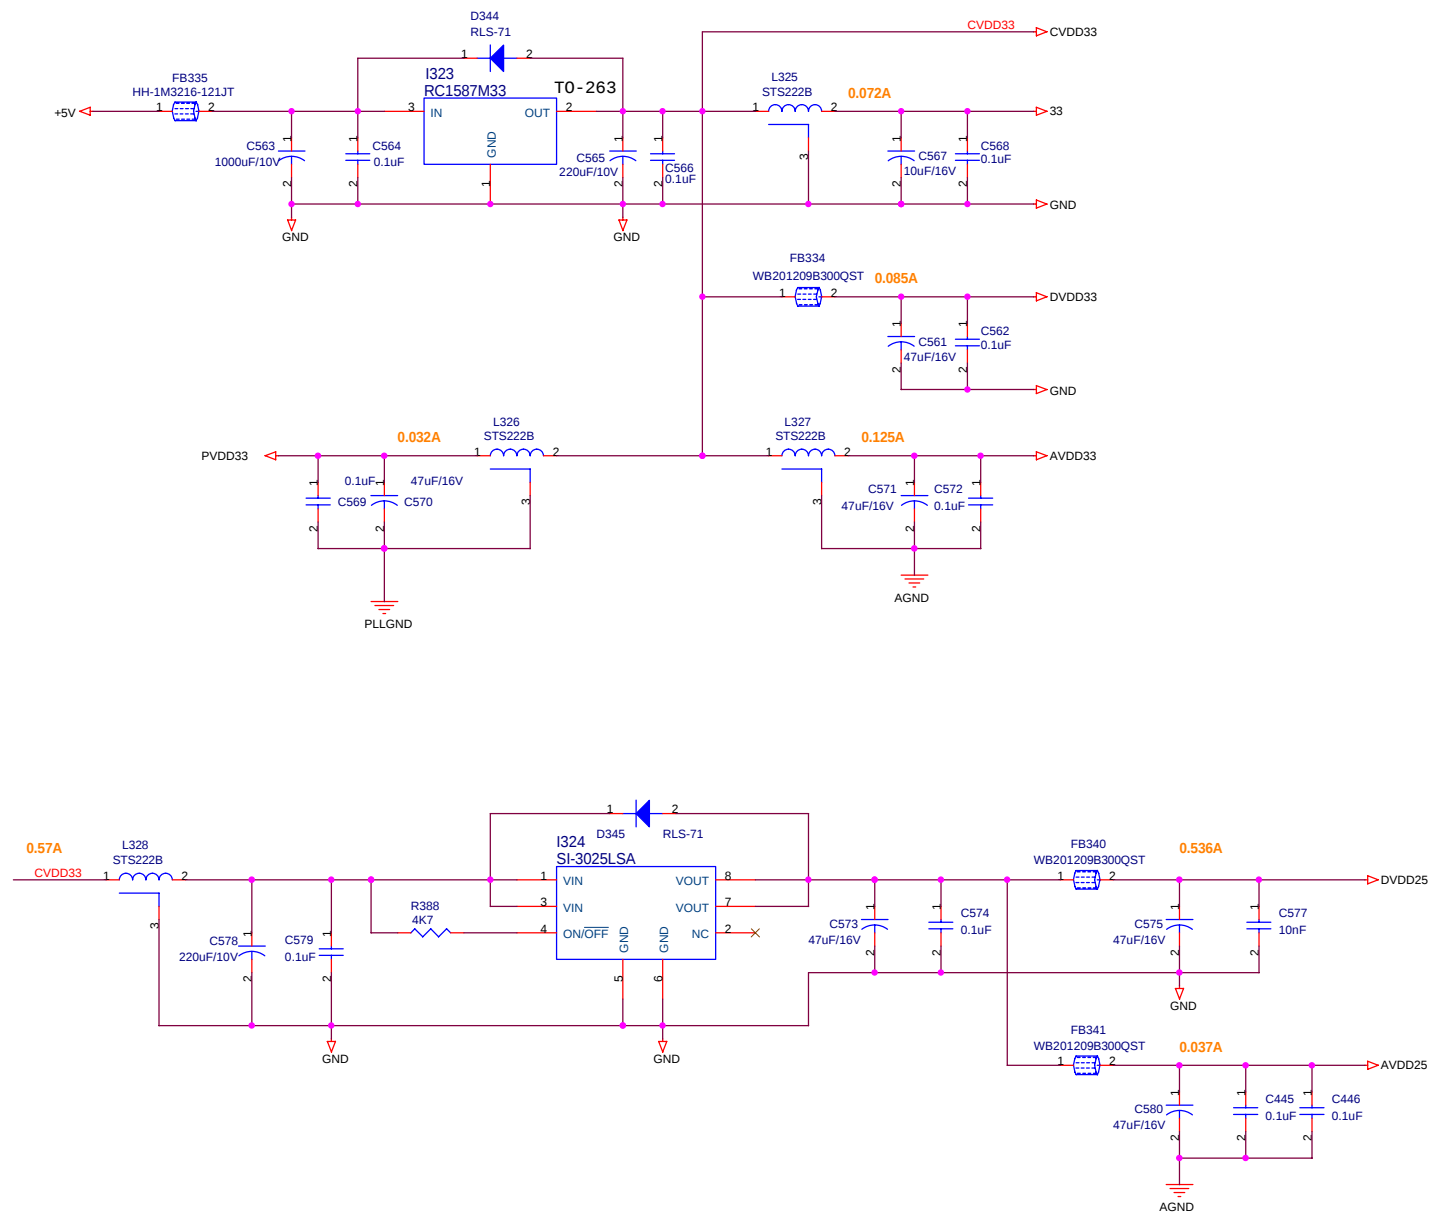

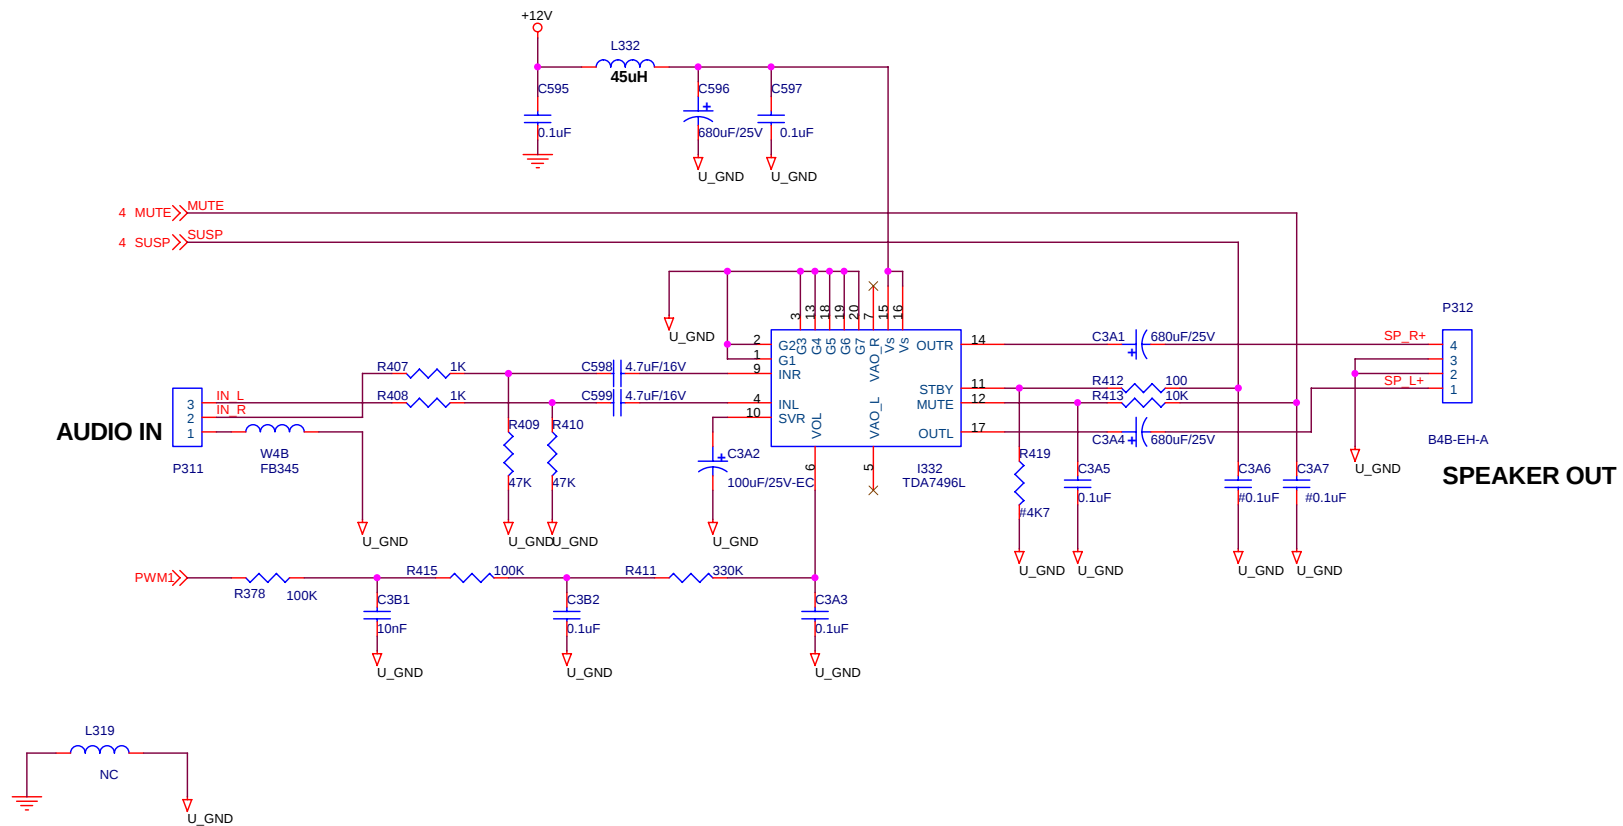

B17AAU/B17ANU			
Title			
Audio			
Size	Document Number		Rev
B	<Doc>		03
Date:	Wednesday, February 20, 2002		Sheet 8 of 8

LITE-ON TECHONLOG CORP

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113300120 Desc:INTERFACE BD-B17AAU(99)-*-E-1-(K)-NON-BR Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 1 OF 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	Sfty
1	02U01	No	10	124	1000205	LABEL-ID DATE CODE-----		EA	1	NO
1	02U02	Yes	10	773	5414540	LABEL-IC LABEL-LITE-ON--ALL-WH	8440001964	EA	1	NO
1	0C3A1	Yes	10	631	1368149	CAP. ALU-uF-680-25V-NF-105C-10		EA	1.00000	NO
1	0C3A2	Yes	10	631	1310145	ALUMINATOR-uF-100-25V-T-105C-6		EA	1.00000	NO
1	0C3A4	Yes	10	631	1368149	CAP. ALU-uF-680-25V-NF-105C-10		EA	1.00000	NO
1	0C3B6	Yes	10	631	11110299	CAP. ALU-uF-1000-10V-F-105-10X		EA	1	NO
1	0C519	Yes	10	631	11110299	CAP. ALU-uF-1000-10V-F-105-10X		EA	1	NO
1	0C563	Yes	10	631	11110299	CAP. ALU-uF-1000-10V-F-105-10X		EA	1	NO
1	0C565	Yes	10	631	1222149	CAP. ALU-uF-220-16V-F-105C-8X1		EA	1	NO
1	0C578	Yes	10	631	1222149	CAP. ALU-uF-220-16V-F-105C-8X1		EA	1	NO
1	0C592	Yes	10	631	11110299	CAP. ALU-uF-1000-10V-F-105-10X		EA	1	NO
1	0C596	Yes	10	631	1368149	CAP. ALU-uF-680-25V-NF-105C-10		EA	1	NO
1	0C598	Yes	10	631	1547979	CAP. ALU-uF-4.7-50V-F-105C-6.3		EA	1	NO
1	0C599	Yes	10	631	1547979	CAP. ALU-uF-4.7-50V-F-105C-6.3		EA	1	NO
1	0I302	Yes	10	644	8015588	IC-CPU/PROM-SM89516C25J(A)-44P		EA	1	NO
1	0I302 51	No	10	644	8015588	IC-CPU/PROM-P89C51RD2HBA/00.51		EA	1	NO
1	0I332	Yes	10	644	2023100	IC-Linear-TDA7496L-20P-PDIP-SG		EA	1.00000	NO
1	0L332	Yes	10	611	1456131	COIL CHOKE--uH-45-K-DRWW10x10L		EA	1.00000	NO
1	0P301	Yes	10	661	3070020	PLUG-7P-2.0mm-A2001WV2-07-JWT		EA	1.00000	NO
1	0P302	Yes	10	661	3100020	PLUG-10P-2.0mm-A2001WV2-10-JWT		EA	1	NO
1	0P304	Yes	10	661	3140011	PLUG-14P-2.0mm-A2001WR2-14-JWT		EA	1.00000	NO
1	0P310	Yes	10	661	3100020	PLUG-10P-2.0mm-A2001WV2-10-JWT		EA	1.00000	NO
1	0P311	Yes	10	661	3030030	PLUG-3P-2.0mm-A2001WR2-03-JWT		EA	1	NO
1	0P312	Yes	10	661	3040020	PLUG-4P-2.0mm-A2001WR2-04-JWT		EA	1.00000	NO
1	0X301	Yes	10	644	9002660	CRYSTAL-24MHZ-HC-49/S-TOPIC-16		EA	1	NO
1	9N020	No	10	125	0000321	OIL HOUSE-THINNER LONCO RF800A		GL	.003	NO
1	9N025	No	10	125	0000221	FLUX-RF800T3-LONCO		GL	.003	NO
1	9N050	Yes	10	125	0000144	WIRE-SOLDER-06m/m--		lb	.00001	NO
1	9N060	No	10	124	2000022	TAPE-MASKING-W1.0cm x L50m-HUN		RL	.0008	NO
1	FB345	Yes	10	688	1006200	CORE-BEAD-W4B RH3.5x6x1.0(W)x2		EA	1	NO
1	I302A	No	10	908	3000192-03	F/W-B17AAU-M103-LITEON		EA	1	NO
1	I332S	No	10	774	6402571-0A	HEAT SINK--GC150ATA-AL-CLEAN	8440003873	EA	1	NO
1	00000	No	10	521	3300120	SMT-INTERFACE BD-B17AAU(9)-*-E		EA	1	NO
2	0C301	Yes	10	631	1210043	ALUMINATOR-uF-10-16V-T-105C--S		EA	1.00000	NO
2	0C302	YES	10	637	3410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C303	Yes	10	637	11110156	CAP. MC-pF-100-50V-J-NPO-SMD 0		EA	1	NO
2	0C304	Yes	10	637	11110156	CAP. MC-pF-100-50V-J-NPO-SMD 0		EA	1	NO
2	0C305	YES	10	637	3410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C306	YES	10	637	3410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C307	Yes	10	637	1210306	CAP. MC-uF-0.01-50V-M-X7R-SMD		EA	1	NO
2	0C308	Yes	10	637	1139056	CAP. MC-pF-39-50V-J-NPO-SMD-06		EA	1	NO
2	0C309	Yes	10	637	1147056	CAP. MC-pF-47-50V-J-NPO-SMD 06		EA	1	NO
2	0C310	Yes	10	637	1147056	CAP. MC-pF-47-50V-J-NPO-SMD 06		EA	1	NO
2	0C311	Yes	10	631	1222043	ALUMINATOR-uF-22-16V-T-105C--S		EA	1	NO
2	0C312	YES	10	637	3410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C314	Yes	10	637	11110056	CAP. MC-pF-10-50V-J-NPO-SMD		EA	1	NO
2	0C316	YES	10	637	3410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO

2	0C317	Yes	10	6311347903	ALUMINATOR-uF-4.7-25V-T-85C--S	EA 1	NO
2	0C319	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C320	Yes	10	6311347903	ALUMINATOR-uF-4.7-25V-T-85C--S	EA 1	NO
2	0C322	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO
2	0C323	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 2	NO
2	0C324	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO
2	0C326	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO
2	0C327	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO

LITE-ON TECHONLOG COR

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113300120 Desc:INTERFACE BD-B17AAU(99)-*-E-1-(K)-NON-BR Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 2 OF 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty
2	0C340	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C349	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C350	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C351	Yes	10	6311210043	ALUMINATOR-uF-10-16V-T-105C--S	EA 1	NO			
2	0C352	Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 06	EA 1	NO			
2	0C353	Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 06	EA 1	NO			
2	0C354	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C355	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C356	Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 06	EA 1	NO			
2	0C357	Yes	10	6371147056	CAP. MC-pF-47-50V-J-NPO-SMD 06	EA 1	NO			
2	0C359	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO			
2	0C361	Yes	10	6371150956	CAP. MC-pF-5-50V-J-NPO-SMD 060	EA 1	NO			
2	0C362	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C363	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO			
2	0C364	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO			
2	0C365	Yes	10	6371150956	CAP. MC-pF-5-50V-J-NPO-SMD 060	EA 1	NO			
2	0C366	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO			
2	0C367	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO			
2	0C368	Yes	10	6371150956	CAP. MC-pF-5-50V-J-NPO-SMD 060	EA 1	NO			
2	0C369	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO			
2	0C370	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C371	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C372	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C383	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C384	Yes	10	6311347903	ALUMINATOR-uF-4.7-25V-T-85C--S	EA 1	NO			
2	0C3A3	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1.00000	NO			
2	0C3A5	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1.00000	NO			
2	0C3B1	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1.00000	NO			
2	0C3B2	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1.00000	NO			
2	0C3B5	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C408	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C409	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C410	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C411	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C412	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C413	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C414	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C415	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C416	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			

2	0C417	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C418	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C419	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C420	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C421	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C422	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C423	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C424	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C425	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C426	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C427	Yes	10	6311222043	ALUMINATOR-uF-22-16V-T-105C--S	EA 1	NO
2	0C428	Yes	10	6311222043	ALUMINATOR-uF-22-16V-T-105C--S	EA 1	NO
2	0C429	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C430	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C431	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C432	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO

LITE-ON TECHONLOG COR

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113300120 Desc:INTERFACE BD-B17AAU(99)-*-E-1-(K)-NON-BR Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 3 OF 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty
2	0C433	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C434	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C435	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C436	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C437	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C438	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C439	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C440	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C441	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C442	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C443	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C444	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C445	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C446	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C447	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C448	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C449	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C450	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C451	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C452	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C455	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C456	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C457	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C458	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C459	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C460	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			
2	0C463	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C464	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C465	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C466	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO			
2	0C467	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO			

2	0C468	Yes	10	6371122106	CAP. MC-pF-220-50V-M-NPO-SMD 0	EA 1	NO
2	0C471	Yes	10	6311222043	ALUMINATOR-uF-22-16V-T-105C--S	EA 1	NO
2	0C472	Yes	10	6311222043	ALUMINATOR-uF-22-16V-T-105C--S	EA 1	NO
2	0C473	Yes	10	6311222043	ALUMINATOR-uF-22-16V-T-105C--S	EA 1	NO
2	0C504	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C505	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C506	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C507	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C508	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO
2	0C509	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C510	Yes	10	6311210043	ALUMINATOR-uF-10-16V-T-105C--S	EA 1	NO
2	0C511	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO
2	0C512	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C513	Yes	10	6311210043	ALUMINATOR-uF-10-16V-T-105C--S	EA 1	NO
2	0C514	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C515	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C516	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C517	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C518	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C520	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO
2	0C521	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C522	Yes	10	6311210043	ALUMINATOR-uF-10-16V-T-105C--S	EA 1	NO
2	0C523	Yes	10	6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD	EA 1	NO
2	0C524	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO

LITE-ON TECHONLOG COR

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113300120 Desc:INTERFACE BD-B17AAU(99)-*-E-1-(K)-NON-BR Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 4 OF 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty

2	0C525	Yes	10		6311210043	ALUMINATOR-uF-10-16V-T-105C--S		EA	1	NO
2	0C526	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C527	Yes	10		6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD		EA	1	NO
2	0C528	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C529	Yes	10		6311210043	ALUMINATOR-uF-10-16V-T-105C--S		EA	1	NO
2	0C561	Yes	10		6311247053	CAP. ALU-uF-47-16V-SMD-105C-6.		EA	1	NO
2	0C562	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C564	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C566	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C567	Yes	10		6311210043	ALUMINATOR-uF-10-16V-T-105C--S		EA	1	NO
2	0C568	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C569	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C570	Yes	10		6311247053	CAP. ALU-uF-47-16V-SMD-105C-6.		EA	1	NO
2	0C571	Yes	10		6311247053	CAP. ALU-uF-47-16V-SMD-105C-6.		EA	1	NO
2	0C572	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C573	YES	10		6374447583	CAP. MC-uF-4.7-16V-Z-Y5V-SMD-1		EA	1	NO
2	0C574	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C575	Yes	10		6311247053	CAP. ALU-uF-47-16V-SMD-105C-6.		EA	1	NO
2	0C577	Yes	10		6371210306	CAP. MC-uF-0.01-50V-M-X7R-SMD		EA	1	NO
2	0C579	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO
2	0C580	YES	10		6374447583	CAP. MC-uF-4.7-16V-Z-Y5V-SMD-1		EA	1	NO
2	0C583	Yes	10		6371130056	CAP. MC-pF-30-50V-J-NPO-SMD 06		EA	1	NO
2	0C585	YES	10		6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0		EA	1	NO

2	0C590	Yes	10	6371130056	CAP. MC-pF-30-50V-J-NPO-SMD 06	EA 1	NO
2	0C591	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C593	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1	NO
2	0C595	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1.00000	NO
2	0C597	YES	10	6373410486	CAP. MC-uF-0.1-25V-Z-Y5V-SMD-0	EA 1.00000	NO
2	0D311	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA 1	NO
2	0D314	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA 1	NO
2	0D321	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA 1	NO
2	0D322	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA 1	NO
2	0D323	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA 1	NO
2	0D324	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA 1	NO
2	0D325	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA 1	NO
2	0D326	YES	10	6412001778	DIODE-MM4148-SMD-GOODARK---	EA 1	NO
2	0D327	Yes	10	6412019508	DIODE--DAN217 SMD3 T146---ROH	EA 1	NO
2	0D328	Yes	10	6414056038	DIODE-ZNR-RLZ TE-11 5.6B LL-34	EA 1	NO
2	0D329	Yes	10	6412019508	DIODE--DAN217 SMD3 T146---ROH	EA 1	NO
2	0D330	Yes	10	6412019508	DIODE--DAN217 SMD3 T146---ROH	EA 1	NO
2	0D331	Yes	10	6412019508	DIODE--DAN217 SMD3 T146---ROH	EA 1	NO
2	0D344	Yes	10	6412019418	DIODE-SWITCHING-RLS-73TE11-130	EA 1	NO
2	0D345	Yes	10	6412019418	DIODE-SWITCHING-RLS-73TE11-130	EA 1	NO
2	0I301	Yes	10	6444006108	IC-MOS-M51953AFP-8P-SOP-	EA 1	NO
2	0I305	YES	10	6448016508	IC-EEPROM-24LC16B/SN-8P-SOP	EA 1	NO
2	0I312	Yes	10	6448018208	IC-24LC02B-8PIN-SOP-MICROCHIP	EA 1	NO
2	0I315	Yes	10	6444007608	IC-CMOS-gm5020-292P-BGA-GENESI	EA 1	NO
2	0I319	Yes	10	6444007708	IC-SN75LVDS83-56PIN-DGG-TI	EA 1	NO
2	0I320	Yes	10	6444007708	IC-SN75LVDS83-56PIN-DGG-TI	EA 1	NO
2	0I321	Yes	10	6442027308	IC-Linear-SI4431DY-T1-8PIN-SO-	EA 1	NO
2	0I323	Yes	10	6442023326	IC-Linear-AIC1084-33CM-3P-TO26	EA 1	NO
2	0I324	Yes	10	6442028308	IC-Linear-SI-3025LSA-TL-8PIN-S	EA 1	NO
2	0I326	YES	10	6446008308	IC-TTL-NC7SZ02M5X-5P--FAIRCHIL	EA 1.00000	NO
2	0L302	Yes	10	6855003500	EMI FILTER-EF-1T2012-050T--C&C	EA 1	NO
2	0L303	Yes	10	6855003500	EMI FILTER-EF-1T2012-050T--C&C	EA 1	NO

LITE-ON TECHONLOG COR

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113300120 Desc:INTERFACE BD-B17AAU(99)-*-E-1-(K)-NON-BR Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 5 OF 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty
2	0L304	Yes	10		6855003500	EMI FILTER-EF-1T2012-050T--C&C		EA 1	NO	
2	0L321	Yes	10		6881602368	CORE-BEAD-FCM160808C-201T02-SM		EA 1	NO	
2	0L322	Yes	10		6881602368	CORE-BEAD-FCM160808C-201T02-SM		EA 1	NO	
2	0L325	Yes	10		6881900468	CORE-BEAD-STC222B 1210--NWE		EA 1	NO	
2	0L326	Yes	10		6881900468	CORE-BEAD-STC222B 1210--NWE		EA 1	NO	
2	0L327	Yes	10		6881900468	CORE-BEAD-STC222B 1210--NWE		EA 1	NO	
2	0L328	Yes	10		6881900468	CORE-BEAD-STC222B 1210--NWE		EA 1	NO	
2	0P307	Yes	10		6610300010	PLUG-30P-1.25mm-DF14-30P-1.25H		EA 1	NO	
2	0Q301	Yes	10		6422003508	TRANSISTOR-NPN-PMBT2222A-SOT23		EA 1	NO	
2	0Q304	Yes	10		6422003508	TRANSISTOR-NPN-PMBT2222A-SOT23		EA 1	NO	
2	0Q307	Yes	10		6422007308	TRANSISTOR-NPN-SST3904T116-T11		EA 1	NO	
2	0Q308	Yes	10		6422007308	TRANSISTOR-NPN-SST3904T116-T11		EA 1	NO	
2	0Q309	Yes	10		6423000708	TRANSISTOR-PNP-SST3906-T116--		EA 1	NO	
2	0Q312	Yes	10		6422003508	TRANSISTOR-NPN-PMBT2222A-SOT23		EA 1	NO	
2	0R303	Yes	10		6252330956	RES. CHIP-R-OHM-33-1/10W-J-060		EA 1	NO	

2	0R304	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA 1	NO
2	0R305	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA 1	NO
2	0R306	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA 1	NO
2	0R307	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R308	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R309	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA 1	NO
2	0R310	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA 1	NO
2	0R311	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R313	Yes	10	6252470056	RES. CHIP-R-OHM-470-1/10W-J-60	EA 1	NO
2	0R315	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R317	Yes	10	6252470056	RES. CHIP-R-OHM-470-1/10W-J-60	EA 1	NO
2	0R318	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R328	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R329	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R330	Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0	EA 1	NO
2	0R331	Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0	EA 1	NO
2	0R332	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R333	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R335	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA 1	NO
2	0R336	Yes	10	6252470956	RES. CHIP-R-OHM-47-1/10W-J-060	EA 1	NO
2	0R337	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R338	Yes	10	6881602278	CORE-BEAD-SBK160808T 400Y-S-SM	EA 1	NO
2	0R339	Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-060	EA 1	NO
2	0R340	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R341	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R342	Yes	10	6881602278	CORE-BEAD-SBK160808T 400Y-S-SM	EA 1	NO
2	0R343	Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-060	EA 1	NO
2	0R344	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R345	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R346	Yes	10	6881602278	CORE-BEAD-SBK160808T 400Y-S-SM	EA 1	NO
2	0R347	Yes	10	6252750956	RES. CHIP-R-OHM-75-1/10W-J-060	EA 1	NO
2	0R349	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R361	YES	10	6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA 1	NO
2	0R368	Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603	EA 1	NO
2	0R369	Yes	10	6252120256	RES. CHIP-R-KOHM-12-1/10W-J-60	EA 1	NO
2	0R370	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R371	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1	NO
2	0R372	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA 1	NO
2	0R374	Yes	10	6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603	EA 1	NO
2	0R375	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA 1	NO

LITE-ON TECHONLOG COR

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113300120 Desc:INTERFACE BD-B17AAU(99)-*-E-1-(K)-NON-BR Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 6 OF 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty
2	0R377	Yes	10		6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0	EA 1		NO	
2	0R378	Yes	10		6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0	EA 1.00000		NO	
2	0R388	Yes	10		6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA 1		NO	
2	0R399	Yes	10		6252000056	RES. CHIP-R-OHM-0-1/10W-J-0603	EA 1.00000		NO	
2	0R407	YES	10		6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA 1.00000		NO	
2	0R408	YES	10		6252100156	RES. CHIP-R-KOHM-1-1/10W-J-603	EA 1.00000		NO	
2	0R409	YES	10		6252470256	RES. CHIP-R-KOHM-47-1/10W-J-60	EA 1.00000		NO	

2	0R410	YES	10	6252470256	RES. CHIP-R-KOHM-47-1/10W-J-60	EA	1.00000	NO
2	0R411	YES	10	6252330356	RES. CHIP-R-KOHM-330-1/10W-J-0	EA	1.00000	NO
2	0R413	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1.00000	NO
2	0R415	Yes	10	6252100356	RES. CHIP-R-KOHM-100-1/10W-J-0	EA	1.00000	NO
2	0R416	Yes	10	6252100056	RES. CHIP-R-OHM-100-1/10W-J-06	EA	1.00000	NO
2	0R418	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
2	0R419	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
2	0R420	Yes	10	6252330956	RES. CHIP-R-OHM-33-1/10W-J-060	EA	1	NO
2	0R421	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
2	0R423	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
2	0R424	Yes	10	6252100256	RES. CHIP-R-KOHM-10-1/10W-J-06	EA	1	NO
2	0R425	YES	10	6252680056	RES. CHIP-R-OHM-680-1/10W-J-60	EA	1	NO
2	0R426	Yes	10	6252470156	RES. CHIP-R-KOHM-4.7-1/10W-J-0	EA	1	NO
2	0R427	Yes	10	6252220156	RES. CHIP-R-KOHM-2.2-1/10W-J-0	EA	1	NO
2	9N030	Yes	10	1250000110	OIL HOUSE-SOLDER PASTE--	EA	.002	NO
2	9N031	No	10	1320001001	OIL HOUSE-CLEANSER FOR SMT-CHU	GL	.0028	NO
2	CP301	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP302	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP303	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP304	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP305	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP306	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP307	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP308	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP309	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP310	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP311	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	CP312	YES	10	6370133019	CAP. MC-pF-33-50V-K-NPO-SMD 06	EA	1	NO
2	FB304	Yes	10	6881101898	CORE-BEAD-BK 2125 HS 431--TIAY	EA	1	NO
2	FB305	Yes	10	6881101898	CORE-BEAD-BK 2125 HS 431--TIAY	EA	1	NO
2	FB306	Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLS	EA	1	NO
2	FB307	Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLS	EA	1	NO
2	FB308	Yes	10	6881101108	CORE-BEAD-WB201209F050QST--WLS	EA	1	NO
2	FB316	Yes	10	6881600308	CORE-BEAD-WB160808B121QNT--WLS	EA	1	NO
2	FB317	Yes	10	6881600308	CORE-BEAD-WB160808B121QNT--WLS	EA	1	NO
2	FB318	Yes	10	6881600308	CORE-BEAD-WB160808B121QNT--WLS	EA	1	NO
2	FB319	Yes	10	6881600308	CORE-BEAD-WB160808B121QNT--WLS	EA	1	NO
2	FB321	Yes	10	6881800858	CORE-BEAD-HB-1P4516-600T60--C&	EA	1	NO
2	FB322	Yes	10	6881600308	CORE-BEAD-WB160808B121QNT--WLS	EA	1	NO
2	FB323	Yes	10	6881600308	CORE-BEAD-WB160808B121QNT--WLS	EA	1	NO
2	FB324	Yes	10	6881800858	CORE-BEAD-HB-1P4516-600T60--C&	EA	1	NO
2	FB325	Yes	10	6881200658	CORE-BEAD-HH-1M3216-121JT--C&C	EA	1	NO
2	FB328	Yes	10	6881200658	CORE-BEAD-HH-1M3216-121JT--C&C	EA	1	NO
2	FB334	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
2	FB335	Yes	10	6881200658	CORE-BEAD-HH-1M3216-121JT--C&C	EA	1	NO
2	FB340	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
2	FB341	Yes	10	6881100406	CORE-BEAD-WB201209B300QS--WLSN	EA	1	NO
2	FB343	Yes	10	6881900528	CORE-BEAD-WB453215B121QST--WLS	EA	1	NO

LITE-ON TECHONLOG COR

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113300120 Desc:INTERFACE BD-B17AAU(99)-*-E-1-(K)-NON-BR Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 7 OF 7

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty
-----	-------	----	-----	----	---------	-------------	------------	-----	----------	------

2	FB344	Yes	10	6881900528	CORE-BEAD-WB453215B121QST--WLS	EA 1	NO
2	I302B	Yes	10	6626440020	SOCKET-IC-8111-44TAB2-44P-PLCC	EA 1	NO
2	RN301	Yes	10	6261022818	RES. FRN-KOHM-1-1/16W-J	EA 1	NO
2	RN302	YES	10	6263302818	RES. FRN-OHM-33-1/16W-J	EA 1	NO
2	RN303	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J	EA 1	NO
2	RN304	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J	EA 1	NO
2	RN305	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J	EA 1	NO
2	RN306	Yes	10	6261012818	RES. FRN-OHM-100-1/16W-J	EA 1	NO
2	RN310	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J	EA 1	NO
2	RN311	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J	EA 1	NO
2	RN312	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J	EA 1	NO
2	RN313	Yes	10	6261032818	RES. FRN-KOHM-10-1/16W-J	EA 1	NO
2	RN314	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN315	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN316	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN317	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN318	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN319	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN320	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN321	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN322	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN323	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN324	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN325	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	RN326	Yes	10	6264702818	RES. FRN-OHM-47-1/16W-J	EA 1	NO
2	U1228	No	10	6832122800-03	PCB-INTERFACE BD-PTB-1228-REV.	EA 1	YES

LITE-ON TECHONLOG CORP

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5114300012 Desc:CONTROL BD-POWER BD-B17AAY(9)-*-U-5-(C)- Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 1 OF 2

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	Sfty
1	02U03	Yes	10	1241000200	LABEL-DATE CODE-----	8340000485	EA	1	NO	
1	0C801	Yes	10	6328833419	CAP. X2-MPP-uF-0.33-275V-K--P=		EA	1	YES	
1	0C801 51	Yes	10	6328833439	CAP. X2-MPP-uF-0.33-275V-K--P=		EA	1	YES	
1	0C802	Yes	10	6328833419	CAP. X2-MPP-uF-0.33-275V-K--P=		EA	1	YES	
1	0C802 51	Yes	10	6328833439	CAP. X2-MPP-uF-0.33-275V-K--P=		EA	1	YES	
1	0C803	YES	10	6302122292	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES	
1	0C803 51	Yes	10	6302122272	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES	
1	0C804	YES	10	6302122292	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES	
1	0C804 51	Yes	10	6302122272	CAP. CD-pF-2200-250V-M-F-7.5-Y		EA	1	YES	
1	0C805	Yes	10	6312615141	CAP. ALU-uF-150-400V-F-105C-18		EA	1	YES	
1	0C805 53	Yes	10	6312615141-01	CAP. ALU-uF-150-400V-F-105C-18		EA	1	NO	
1	0C805 52	Yes	10	6312615151	CAP. ALU-uF-150-400V-105C-18X4		EA	1	NO	
1	0C805 51	No	10	6312615191	CAP. ALU-uF-150-400V-F-105C-18		EA	1	NO	
1	0C806	Yes	10	6338547212	CAP. CD-pF-4700-1000V-K-F-7.5-		EA	1	NO	
1	0C828	YES	10	6302410262	CAP. CD-pF-1000-250V-M-F-P=10-		EA	1	YES	
1	0C828 51	Yes	10	6302410242	CAP. CD-pF-1000-250V-M-F-10-SY		EA	1	YES	
1	0D801	Yes	10	6417001000	DIODE-BRIDGE-TS4B05G-01----TSC		EA	1.00000	YES	
1	0D809	Yes	10	6412015210	DIODE-SWITCHING-YG902C2R-10A/2		EA	1.00000	NO	
1	0D810	Yes	10	6417000720	DIODE-BRIDGE-YG802C04R----FUJI		EA	1.00000	NO	
1	0F801	Yes	10	6851031550	FUSE-TIME LAG-3.15A/250V---LIT		EA	1	YES	
1	0G801	Yes	10	7748000190-0A	GROUNDING-CONNECTOR-MTS-C150AT	8440003377	EA	1	NO	
1	0I801	Yes	10	6442022010	IC-Linear-KA3842AE-S-8P-PDIP-F		EA	1	NO	
1	0I802	Yes	10	6442014000	IC-Linear-LTV-817D-4P-PDIP-LIT		EA	1	YES	
1	0L802	Yes	10	6111106132	COIL CHOKE--uH-10-K-15.5Ts/0.7		EA	1.00000	YES	
1	0P801	Yes	10	6714030050-00	HARNESS--3P-260mm-1015#18-WHIT		EA	1.00000	YES	
1	0P802	YES	10	6711100140-00	HARNESS-10P-70mm-2.0 1007#26-3		EA	1	NO	
1	0P803	YES	10	6711060400-00	HARNESS-6P-2.0-100mm-1007#26--		EA	1	NO	
1	0Q803	Yes	10	6426006701	FET-N-CHNL-SSS7N60B-FAIRCHILD		EA	1	NO	
1	0R802	Yes	10	6201080012	THERMISTOR-OHM-8-3A-P=5-SCK-08		EA	1	YES	
1	0R803	Yes	10	6221210452	RES. MOF-KOHM-100-2W-J-HOR-		EA	1	NO	
1	0R805	Yes	10	6221210452	RES. MOF-KOHM-100-2W-J-HOR-		EA	1	NO	
1	0R806	Yes	10	6221333352	RES. MOF-KOHM-33-3W-J-HOR-		EA	1	NO	
1	0R811	Yes	10	6221147852	RES. MOF-OHM-0.47-1W-J-HOR-		EA	1	NO	
1	0R833	Yes	10	6221112252	RES. MOF-KOHM-1.2-1W-J-HOR-		EA	1	NO	
1	0T801	Yes	10	6138003000	LINE FILTER-TLF-1030-mH-10.5-E		EA	1	YES	
1	0T802	Yes	10	6131052800	XFRMER-POWER-TPW-1090-ER-28S-L		EA	1.00000	YES	
1	9N005	No	10	1250000130	WIRE-SOLDER-ADEPO S60A--		kg	.00001	NO	
1	9N010	No	10	1250000141	WIRE-SOLDER-12M/M--		kg	.00003	NO	
1	9N020	No	10	1250000321	OIL HOUSE-THINNER LONCO RF800A		GL	.0005	NO	
1	9N025	No	10	1250000221	FLUX-RF800T3-LONCO		GL	.003	NO	
1	9N030	No	10	1250000415	OIL HOUSE-VA-450 SCREW LOCKING		kg	.00002	NO	
1	9N040	Yes	10	6875000101	ADHESIVE-HOT MELT-11.3X300mm 1		lb	.004	NO	
1	9N040 51	Yes	10	6875000400	ADHESIVE-HOT MELT-521 UL94V-0-		EA	.004	YES	
1	9N050	No	10	1250000100	OIL HOUSE-SOLDER BAR ADEPTO S6		l	.003	NO	
1	9N080	Yes	10	1240000423	TAPE--50Mx508mmx0055mm-PCK-		RL	.0002	NO	
1	D809M	No	10	7746402680-0A	HEAT SINK-BU170ATA-AL6063--	8440003954	EA	1	NO	
1	D809N	Yes	10	7110230081	SCREW-MACHINE--Pan-M3-8-Zn	8440000018	EA	1	NO	

1	D809O	No	10	1250000520	HEAT SINK-COMPOUND---	kg .00005	NO
1	D809P	No	10	1250000415	OIL HOUSE-VA-450 SCREW LOCKING	kg .00002	NO
1	D810M	Yes	10	7746402560-0A	HEAT SINK-POWER BD---	EA 1	NO
1	D810N	Yes	10	7150130081-0A	SCREW-BTYPE--Round-M3-8-Zn	8440003300 EA 1	NO
1	D810O	No	10	1250000520	HEAT SINK-COMPOUND---	kg .00005	NO
1	D810P	No	10	1250000415	OIL HOUSE-VA-450 SCREW LOCKING	kg .00002	NO
1	F801A	Yes	10	6622050010	FUSE CLIP-FC-04 for D=5mm FUSE	EA 2	NO
1	Q803M	No	10	7746402680-0A	HEAT SINK-BU170ATA-AL6063--	8440003954 EA 1	NO

LITE-ON TECHONLOG COR

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5114300012 Desc:CONTROL BD-POWER BD-B17AAY(9)-*-U-5-(C)- Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 2 OF 2

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty
1	Q803N	Yes	10	7110230081	SCREW-MACHINE--Pan-M3-8-Zn	8440000018 EA 1	NO			
1	Q803O	No	10	1250000520	HEAT SINK-COMPOUND---	kg .00005	NO			
1	Q803P	No	10	1250000415	OIL HOUSE-VA-450 SCREW LOCKING	kg .00002	NO			
1	VR801	Yes	10	6245102003	VARIABLE-KOHM-1-0.3W-TA--6D--	EA 1	NO			
1	00000	No	10	5714300012	AI-POWER BD-B17AAY(9)-*-U-5-(C	EA 1.0000000	NO			
2	0C807	Yes	30	6311347045	ALUMINATOR-UF-47-25V-T-105C-5*	EA 1	NO			
2	0C809	Yes	10	6335522115	CAP. CD-pF-220-1000V-K-T--Y5P-	EA 1.0000000	NO			
2	0C810	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-	EA 1	NO			
2	0C811	Yes	30	6335110215	CAP. CD-PF-1000-50V-K-T--Y5P-	EA 1	NO			
2	0C812	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-	EA 1	NO			
2	0C813	Yes	30	6335110315	CAP. CD-UF-0.01-50V-K-T--Y5P-	EA 1	NO			
2	0C814	Yes	30	6311510045	ALUMINATOR-uF-10-50V-T-105C-5x	EA 1	NO			
2	0C815	Yes	30	6357127355	CAP. PEM-uF-0.027-50V-J-T	EA 1	NO			
2	0C816	Yes	30	6338210215	CAP. CD-pF-1000-100V-K-T--X7R-	EA 1	NO			
2	0C817	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1	EA 1	NO			
2	0C818	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1	EA 1	NO			
2	0C820	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-	EA 1	NO			
2	0C821	Yes	30	6338210215	CAP. CD-pF-1000-100V-K-T--X7R-	EA 1	NO			
2	0C822	Yes	30	6311210245	ALUMINATOR-uF-1000-16V-T-105C-	EA 1	NO			
2	0C823	Yes	30	6311347145	ALUMINATOR-uF-470-25V-T-105C-1	EA 1	NO			
2	0C824	Yes	30	6311210245	ALUMINATOR-uF-1000-16V-T-105C-	EA 1	NO			
2	0C825	Yes	30	6311210245	ALUMINATOR-uF-1000-16V-T-105C-	EA 1	NO			
2	0C826	Yes	30	6338110485	CAP. CD-UF-0.1-50V-Z-T--Y5V-	EA 1	NO			
2	0C827	Yes	30	6357127355	CAP. PEM-uF-0.027-50V-J-T	EA 1	NO			
2	0C831	Yes	30	6311310045	CAP. ALU-uF-10-25V-T-105C-5x11	EA 1.00000	NO			
2	0D803	Yes	20	6412007924	DIODE-SWITCHING-FUF4006AMP-1A/	EA 1	NO			
2	0D804	Yes	20	6412012317	DIODE--FUF4005AMP-1A/600V-T52-	EA 1	NO			
2	0D806	Yes	20	6412001704	DIODE-SWITCHING-1N4148 T-77--T	EA 1	NO			
2	0I803	Yes	10	6442001340	IC-Linear-KA431AZ-3P-TO-92-Vre	EA 1	NO			
2	0J801	Yes	20	6700060520	JUMPER WIRE---(52mm TAPING TYP	EA 1	NO			
2	0L804	Yes	20	6700060000	JUMPER WIRE-	kg .00009	NO			
2	0L805	Yes	20	6700060000	JUMPER WIRE-	kg .00009	NO			
2	0Q806	Yes	30	6423000045	TRANSISTOR-PNP-2SA733P-T-TAPIN	EA 1	NO			
2	0R801	YES	20	6221147457	RES. MOF-KOHM-470-1W-J-AT52-	EA 1	NO			
2	0R807	Yes	20	6212133954	RES. CF-OHM-3.3-1/4W-J-T26-MIN	EA 1	NO			
2	0R808	Yes	20	6212115254	RES. CF-KOHM-1.5-1/4W-J-T26-MI	EA 1	NO			
2	0R810	Yes	20	6212139254	RES. CF-KOHM-3.9-1/4W-J-T26-MI	EA 1	NO			
2	0R812	Yes	20	6212120354	RES. CF-KOHM-20-1/4W-J-T26-MIN	EA 1	NO			
2	0R813	Yes	20	6212122154	RES. CF-OHM-220-1/4W-J-T26-MIN	EA 1	NO			

2	0R814	Yes	20	6212127054	RES. CF-OHM-27-1/4W-J-T26-MINI	EA 1	NO
2	0R815	Yes	20	6212175154	RES. CF-OHM-750-1/4W-J-T26-MIN	EA 1	NO
2	0R817	Yes	20	6212139254	RES. CF-KOHM-3.9-1/4W-J-T26-MI	EA 1	NO
2	0R818	Yes	20	6212115354	RES. CF-KOHM-15-1/4W-J-T26-MIN	EA 1	NO
2	0R819	Yes	20	6212151254	RES. CF-KOHM-5.1-1/4W-J-T26-MI	EA 1	NO
2	0R820	Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI	EA 1	NO
2	0R823	Yes	20	6212127154	RES. CF-OHM-270-1/4W-J-T26-MIN	EA 1	NO
2	0R824	Yes	20	6212127254	RES. CF-KOHM-2.7-1/4W-J-T26-MI	EA 1	NO
2	0R825	Yes	20	6212110354	RES. CF-KOHM-10-1/4W-J-T26-MIN	EA 1	NO
2	0R826	Yes	20	6212110254	RES. CF-KOHM-1-1/4W-J-T26-MINI	EA 1	NO
2	0R827	Yes	20	6212120254	RES. CF-KOHM-2-1/4W-J-T26-MINI	EA 1	NO
2	0R832	Yes	20	6212151254	RES. CF-KOHM-5.1-1/4W-J-T26-MI	EA 1	NO
2	U1229	No	10	6832122900-02	PCB-POWER BD-PTB-1229-02	EA 1	YES
2	ZD801	YES	20	6414180074	DIODE-ZENER-GDZJ18B-T/B--T26--	EA 1	NO

LITE-ON TECHONLOG CORP

XXBOMR1001

BOM LIST BY CKT-ID

Block Number:5113800013 Desc:FUNCTION KEY BD-B17AAU(9)-*-E-2-(K)-NON- Plan_Level:

Category From:

Approve:Both

Report Date:29-APR-2002 15:23

To:

Org:RD

Page: 1 OF 1

Lvl	CKTID	G1	Apr	OP	Item No	Description	Drqwing No	Uom	Quantity	SFty
1	0C6A1		Yes	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1	NO
1	0C6A2		Yes	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1	NO
1	0C6A3		Yes	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1	NO
1	0C6A4		Yes	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1	NO
1	0C6A5		Yes	10	6341410482	CAP. MC-uF-0.1-50V-Z-Y5V-F-P=5		EA	1	NO
1	0D600		Yes	10	6418004401	LED-LTL-36EDJP-1(Y)3(G)--LITEO		EA	1	NO
1	0P601		YES	10	6613090020	PLUG-9P-2.0mm-JWT-A2001WR2-09-		EA	1.00000	NO
1	9N066		No	10	1250200223	OIL HOUSE-PREVENTOR 500--		EA	.00005	NO
1	9N080		Yes	10	1240000423	TAPE--50Mx508mmx0055mm-PCK-		RL	.000046	NO
1	D601M		Yes	10	7742607650-0A	HOLDER-LED-CPQ-B1770----		EA	1	NO
1	SW601		YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1.00000	NO
1	SW602		YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1.00000	NO
1	SW603		YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1.00000	NO
1	SW604		YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1.00000	NO
1	SW605		YES	10	6853001110	SWITCH-TACT-TSAB-1-4PIN-BLK		EA	1.00000	NO
1	U1243		No	10	6832124300-02	PCB-FUNCTION KEY BD-PTB-1243-0		EA	1	YES