


**CU20025-UW1J**

SIMPLIFIED DATASHEET

■ Features

20 character x 2 line display  
 LCD compatible module.  
 Simple control.

■ Physical dimension

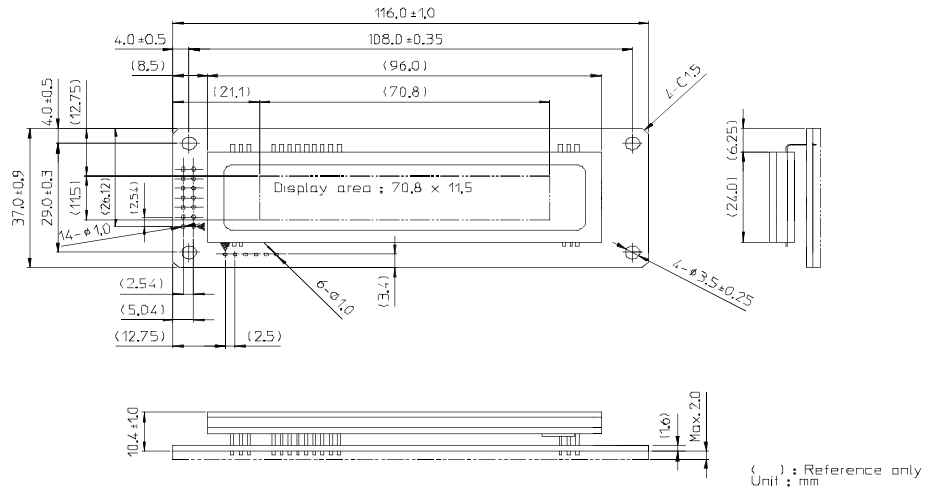

Specifications

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Logic Input Voltage						
DB0-DB7, RS,R/W(WR), E(RD),SCK, STB	VIH1	2.0	-	VCC	VDC	VCC-VSS= 5.0 V
	VIL1	VSS	-	0.8		
Logic Input Voltage	VIH2	0.7VCC	-	VCC	VDC	VCC-VSS= 5.0 V
SI/SO	VIL2	VSS	-	0.3VCC		
Logic Input Voltage	VIH3	0.8VCC	-	VCC	VDC	VCC-VSS= 5.0 V
/RESET	VIL3	VSS	-	0.2VCC		
Power supply Voltage	VCC-VSS	4.75	5.00	5.25	VDC	-

■ Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Logic Output Voltage	'H'	VCC-0.8	-	-	VDC	IOH = -4 mA
	'L'	-	-	0.6		IOL = 4 mA
	'H'	VOH	VCC-0.5	-	VDC	IOH = -2 mA
	'L'	-	-	0.5		IOL = 2 mA
Power Supply Current 1	ICC1	-	140	200	mA	Display ON
Power Supply Current 2	ICC2	-	3	10	mA	Display OFF
Power Consumption		-	0.7	1.0	W	Display ON

■ Optical Characteristics

Parameter	Value
Luminance	350 cd/m <sup>2</sup> Min.
Color of illumination	Green (Blue-Green)

■ Environmental Conditions

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-50 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (Non operation)	539m/s <sup>2</sup> (55G) 10ms

■ Physical Specifications

Parameter	Value
Number of char.	40 (20 x 2)
Built-in Fonts	5x7 ANK, International
Display area	70.8 x 11.5 mm (X x Y)
Character size	2.4 x 4.7 mm (X x Y)
	Underline is not included.
Character pitch	3.6 mm
Line pitch	6.1 mm
Weight	About 40 g

■ Interface

8bit/4bit Parallel(TTL), Synchronous Serial (CMOS)

■ Pin Assignment (Parallel)

Pin No.	Signal	Pin No.	Signal
1	GND	2	VCC
3	NC	4	RS
5	R/W(WR)	6	E(RD)
7	DB0	8	DB1
9	DB2	10	DB3
11	DB4	12	DB5
13	DB6	14	DB7

(Synchronous Serial )

Pin No.	Signal
1	VCC
2	SI/SO
3	GND
4	STB
5	SCK
6	NC

■ Functions

Parameter	Value
Command compatible with	HD44780 LCD controller
Display ON/OFF	
Brightness Control	
Cursor ON/OFF	
8 User definable character font	
etc.	

